

05/22/00  
1668 U.S. PTO  
09/576221

**NONPROVISIONAL PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400  
Facsimile: (703) 836-2787

Attorney Docket No.: 106121

Date: May 22, 2000

**BOX PATENT APPLICATION**

**NONPROVISIONAL APPLICATION TRANSMITTAL  
RULE §1.53(b)**

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): IMAGE STORAGE

By (Inventors): Akira OHMURA, Tetsushi NOMOTO, Yukinobu ISHINO and Masahide TANAKA

- ☒ Formal drawings (Figs. 1-51B; 51 sheets) are attached.  
☒ A Declaration and Power of Attorney is filed herewith.  
☒ An assignment of the invention to NIKON CORPORATION and NIKON TECHNOLOGIES INC. is filed herewith.  
☒ An Information Disclosure Statement is filed herewith.  
☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.  
☐ A Preliminary Amendment is filed herewith.  
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. \_\_\_\_\_, filed \_\_\_\_\_--  
☒ Priority of foreign application(s) No. 11-149972 filed May 28, 1999 in, Japan filed 11-163988 filed June 10, 1999 in Japan, 11-163989 filed June 10, 1999 in Japan, 11-163990 filed June 10, 1999 in Japan, are claimed (35 U.S.C. §119).  
☒ A certified copy of the above corresponding foreign application(s) is filed herewith.  
☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF  
ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	75 - 20	= 55
INDEP CLAIMS	24 - 3	= 21
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\* If the difference is less than zero, enter "0".

**SMALL ENTITY**


RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

**OTHER THAN A  
SMALL ENTITY**

RATE	FEE
	\$ 690
x 18	\$990
x 78	\$1,638
+260	\$0
TOTAL	\$3,318

- ☒ Check No. 108698 in the amount of \$3,318 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.  
☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,



James A. Oliff  
Registration No. 27,075

Mario A. Costantino  
Registration No. 33,565

JAO:MAC/trb  
Date: May 22, 2000

### **Inventor Information**

Inventor One Given Name:: Akira  
Family Name:: Ohmura  
Name Suffix::  
City of Residence:: Tokyo  
State or Prov. of Residence::  
Country of Residence:: Japan  
Inventor Two Given Name:: Tetsushi  
Family Name:: Nomoto  
Name Suffix::  
City of Residence:: Tokyo  
State or Prov. of Residence::  
Country of Residence:: Japan  
Inventor Three Given Name:: Yukinobu  
Family Name:: Ishino  
Name Suffix::  
City of Residence:: Tokyo  
State or Prov. of Residence::  
Country of Residence:: Japan  
Inventor Four Given Name:: Masahide  
Family Name:: Tanaka  
Name Suffix::  
City of Residence:: Tokyo  
State or Prov. of Residence::  
Country of Residence:: Japan  
Inventor Five Given Name ::  
Family Name::  
Name Suffix::  
City of Residence::  
State or Prov. of Residence::  
Country of Residence::

### **Correspondence Information**

Name Line One:: Oliff & Berridge PLC  
Address Line One:: P.O. Box 19928  
City:: Alexandria  
State or Province:: VA  
Postal or Zip Code:: 22320  
Telephone:: (703) 836-6400  
Fax:: (703) 836-2787  
Electronic Mail:: commcenter@oliff.com

### **Application Information**

Title Line One:: Image Storage  
Title Line Two::  
Title Line Three::  
Title Line Four::

Total Drawing Sheets:: 51  
Docket Number:: 106121

### **Continuity Information**

>This application is a::  
Application One::  
Filing Date::  
Patent Number::  
which is a::  
>>Application Two::  
Filing Date::  
Patent Number::

### **Prior Foreign Applications**

Foreign Application One:: 11-149972  
Filing Date:: May 28, 1999  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Two:: 11-163988  
Filing Date:: June 10, 1999  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Three:: 11-163989  
Filing Date:: June 10, 1999  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Four:: 11-163990  
Filing Date:: June 10, 1999  
Country:: Japan  
Priority Claimed:: Yes

## IMAGE STORAGE

BACKGROUND OF THE INVENTION1. Field of Invention

5       The present invention relates to an image storage for a digital image, and more particularly to an image storage for storing digital image taken by a digital still camera.

2. Description of Related Art

10       In this field of art, various types of image storage have been proposed for storing digital still image taken by digital still cameras. However, the reliable retrieval of the stored image has not been fully considered. In other words, a desired image may  
15 be lost if the memory medium itself, such as disk or card storing the image is lost. Further, it may be difficult to readily locate the desired image in particular one of a plurality of memory medium even if all of them are successfully kept in a library.

20       Further, it has not been fully considered to facilitate the transmission of the image data from the digital camera to the image storage. In other words, the data transmission has been troublesome, or possibly forgotten. Therefore, it has been uncertain whether all  
25 the images are collected within the image storage. This means that it is uncertain whether a desired image can be located and retrieved through the image storage.

Various attempts in this field of art are disclosed in the related arts, such as USP 5,528,285, Japanese  
30 Laid Open Applications, 8-69684, 8-102897.

SUMMARY OF THE INVENTION

In order to overcome the problems and disadvantages, the invention provides an image storage comprising a built-in memory of a large capacity for  
35 storing a plurality of image data taken by a digital camera and a digital circuit for retrieving a desired one of the plurality of image data from the built-in

memory. The image storage further comprises a controller to have the image storage receive the image data transmitted from the digital camera through a connector to store the same in the built-in memory in response to the detection of the connection by the detector.

According to the features above, all the digital images taken by a digital camera are automatically collected and stored within the built-in memory of the image storage. This makes it certain that any image can be retrieved from the image storage without fail. In case of ordinary image storage with a removable memory, on the contrary, some images may be lost with the removable memory. Or, if there are many removable memories, it may be difficult to locate one including a desired image. The large capacity of built-in memory according to the invention removes such disadvantage of dividing many images into a plurality of removable memories.

The image storage of the invention may have a charging connector for a digital camera of a rechargeable type. In this case, only by docking the digital camera to the image storage for the purpose of charging the digital camera, both the charging connector and the connector for the data transmission are made in contact between the digital camera and the image storage. Thus, the images in the digital camera are collected by the image storage without fail upon charging the digital camera.

The invention further provides a digital camera comprising a controller to have the digital camera to read out the image data from its memory to transmit the same to an image storage through a connector in response to the image storage detecting the connection of the connector. This facilitates the image data transmission from the digital camera to the image storage for avoiding a failure of the transmission which

35

would be caused by a failure of requesting the transmission from the image storage.

According to another feature of the invention, a digital camera of a rechargeable type is proposed to  
5 comprise a first connector for data transmission with an image storage and a second connector for receiving power to charge the digital camera. The digital camera further comprises controller to have the digital camera automatically initiate the charging through the second  
10 connector in response to a termination of the image data transmission to the image storage through the first connector. This feature is quite advantageous to carry out both the data transmission and the camera charging.

According to still another feature of the  
15 invention, a digital camera connectable to an image storage for data transmission is proposed to comprise a controller for automatically turning on the power switch in response to the image storage detecting the connection of the digital camera to the image storage.  
20 This feature makes it possible to automatically start the data transmission even if the digital camera with its power off is connected to the image storage.

According to further feature of the invention, a digital camera connectable to an image storage for data  
25 transmission is proposed to comprise a controller for automatically turning off the power switch in response to the image storage. This feature makes it possible to avoid a meaningless consumption of the power of the digital camera.

30 According to still further feature of the invention, a digital camera connectable to an image storage for data transmission is proposed to comprise a digital circuit for erasing the image data from the camera memory and a controller to have the digital  
35 circuit function to delete all the possible digital image data after the completion of the transmission thereof to the image storage. This feature makes it

possible for the digital circuit of the digital camera to function without fail for getting ready to a coming picture taking with a sufficient capacity of the memory in the camera. This advantage is an incentive for user  
5 to connect the digital camera to the image storage.

The image storage according to the invention may be advantageously practiced as a television set capable of storing digital still image. In other words, the digital still image can be watched on the television set as if a broadcast program.

More specifically, the invention further provides a television set comprising ordinary television circuit including a tuner for receiving a broadcast program, a built-in memory of a large capacity for storing a plurality of digital still image data and a monitor for selectively displaying the broadcast program in the first mode or the still image from the built-in memory in the second mode. The television set further comprises a memory controller for leaving the built-in memory in a rested condition when the television set is turned on to activate the television circuit in the first mode, and for activating the built-in memory when the mode is changed into the second mode. Thus, the television set initially functions as if ordinary one without such confusion that the built-in memory would meaninglessly activated when a user turns on the television set to watch the broadcast program.

Or, the invention provides a television set comprising ordinary television circuit including a tuner for receiving a broadcast program, a memory for storing a plurality of digital still image, a monitor for selectively displaying the broadcast program or the still image from the memory, an input for receiving the digital still image, and a controller to have the television set receive the digital still image through the input to store the same in the memory. Thus, the television set according to the invention not only

displays the still image but also receives the digital still image for the storage therein.

Other features and advantages according to the invention will be readily understood from the detailed description of the preferred embodiments in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of the system of First Embodiment.

10 Fig. 2 is a schematic diagram of the system configuration of First Embodiment.

Fig. 3 is a block diagram of an image storage.

Fig. 4 is a block diagram of a docking station.

Fig. 5 is a block diagram of a digital camera.

15 Fig. 6 is the first flowchart illustrating the operation of the image storage.

Fig. 7 is the second flowchart illustrating the operation of the image storage.

20 Fig. 8 is the first flowchart illustrating the manner of controlling signal transmission.

Fig. 9 is the second flowchart illustrating the manner of controlling signal transmission.

Fig. 10 is the third flowchart illustrating the manner of controlling signal transmission.

25 Fig. 11 shows an example of folder made in the memory of the image storage.

Fig. 12 is a flowchart illustrating disconnection interruption.

30 Fig. 13 is the first flowchart illustrating the manner of controlling signal transmission that is different from Fig. 7, 8 and 9.

Fig. 14 is the second flowchart illustrating the manner of controlling signal transmission that is different from Fig. 7, 8 and 9.

35 Fig. 15 is the second flowchart illustrating the manner of controlling signal transmission that is different from Fig. 7, 8 and 9.



Fig. 16 shows a remote controller used in First Embodiment.

Fig. 17 is a flowchart showing the basic operation of a main body.

Fig. 18 is a basic flowchart showing operation in the album mode of First Embodiment.

Fig. 19 is a flowchart showing image acquisition interruption of First Embodiment.

Fig. 20 is a flowchart showing detailed operation in the album mode of First Embodiment.

Fig. 21 is a flowchart showing the operation of advancing the image of First Embodiment.

Fig. 22 is an example of display on the monitor that illustrates the operation of changing the hierarchy of First Embodiment.

Fig. 23 is a flowchart showing the operation of hierarchy change.

Fig. 24 is a flowchart showing the selection in the operation of hierarchy change.

Fig. 25 is a flowchart showing the operation of my-album mode.

Fig. 26 is a flowchart showing the operation of retrieval.

Fig. 27 is a flowchart showing the operation of printing.

Fig. 28 is a flowchart showing the operation of termination of the album mode of First Embodiment.

Fig. 29 is a perspective view of the system Second Embodiment.

Fig. 30 is a schematic diagram of the system configuration of Second Embodiment.

Fig. 31 shows the remote controller used in Second Embodiment.

Fig. 32 is a flowchart showing the operation of mode selection processing in Second Embodiment.

Fig. 33 is an example of display on the monitor of Second Embodiment.

Fig. 34 is a flowchart showing the operation of the album mode of Second Embodiment.

Fig. 35 is an example of schedule display on the monitor on information on all folders in Second Embodiment.

Fig. 36 is an example of thumbnail images displayed on the monitor of Second Embodiment.

Fig. 37 is a flowchart showing the operation of the search condition setting process of Second Embodiment.

Fig. 38 is an example of the search condition setting menu displayed on the monitor of Second Embodiment.

Fig. 39 is a flowchart illustrating the operation of searching the title of the album of Second Embodiment.

Fig. 40 is an example of the page of the list of album titles displayed on the monitor of Second Embodiment.

Fig. 41 is a flowchart showing the operation of saving and entering the search conditions of Second Embodiment.

Fig. 42 is a flowchart showing the operation of entering the search condition option item of Second Embodiment.

Fig. 43 is a flowchart showing the operation of print mode process of Second Embodiment.

Fig. 44 is the print mode process menu displayed on the monitor of Second Embodiment.

Fig. 45 is the print condition menu displayed on the monitor of Second Embodiment.

Fig. 46 is a flowchart showing the operation of television mode process of Second Embodiment.

Fig. 47 is an example of the display of a print output of Second Embodiment.

Fig. 48 is a perspective view of the system design of Third Embodiment.

Fig. 49 is a schematic diagram of system configuration of Third Embodiment.

Fig. 50 is a perspective view of the system of Fourth Embodiment.

5 Fig. 51 is a diagram showing the configuration of the printer of Fifth Embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[First Embodiment]

##### (1) System Design

10 The perspective view and the schematic diagram of the system design for First Embodiment are shown in Figs. 1 and 2, respectively.

According to the television set in First Embodiment, a monitor 2 consisting of the plasma display panel, for example, is separated from a main body 1. 15 The main body 1 is connected to the monitor 2 by a cable 1a for transmitting the audio and image signal from the former to the latter. The main body 1 is operated by means of a remote controller 3. The main body 1 and the 20 monitor 2 are provided with the common power source by way of cables 1b and 2a, respectively.

An image storage 4 is connected to the main body 1 through a cable 4a for transmitting control signal from the main body 1 to the image storage 4, and further 25 through a cable 4b for transmitting the audio and image signal from the image storage 4 to the main body 1 at AV input thereof. The image storage 4 includes a large capacity memory such as a hard disc for storing large number of digital image data with their identification 30 data. The image storage is provided with the common power source by way of a cable 4c, and further connected to a printer 9 through a cable.

The remote controller 3 for usually controlling the ordinary television watching function in the 35 television mode is switched into an album mode when a later mentioned album mode button is pressed. In the album mode, the main body 1 responsive to the operation

of the remote controller 3 controls the image storage 4 to transmit image signal ordered by the remote controller 3 for the display of the image on the monitor 2.

5           A docking station 5 has a mounting portion for a digital still camera (hereinafter referred to as a digital camera) 6. The mounting portion is provided with a power supply connector 5f and a signal connector 5d, which are automatically made in contact with  
10           corresponding connectors of the digital camera 6 when it is mounted on the mounting portion of the docking station 5. The docking station 5 includes an AC adapter 5e, which is fed with the common power source through a cable 5a and has an output connected to power connector  
15           5f. An IEEE 1394 connector 5c of the docking station 5 is directly connected to the image storage 4. Thus, the docking station 5 is of a simple design consisting of the mounting portion for the digital camera, the signal connector 5d, the IEEE 1394 connector 5c, power  
20           connector 5f, and the AC adapter 5e, and is dedicated to the digital camera 6 of a specific type. On the contrary, the image storage 4 is of a common use type interchangeably connected to any docking station dedicated to one of various types of digital cameras  
25           by means of standardizing the shape of the connector for a cable 5b.

          In operation, in automatic response to the mounting of the digital camera 6 on the docking station 5, the data transmission is initially triggered to  
30           automatically transmit the entire digital image signal in the digital camera to the image storage 4 through the cable 4b. If the completion of the automatic transmission without error is confirmed, all contents of memory in the digital camera is automatically deleted,  
35           when the LED 5k is energized to inform the emptiness of the memory. On the completion of the data transmission, the power charging is automatically

Fig. 2 represents schematic diagram of the system design for First Embodiment, in which the cable 1a connects an AV connector 1c of the main body 1 to an AV connector 2b of the monitor 2. In the ordinary television mode, the main body 1 transmits signal generated from a TV circuit 1d including tuner to the AV connector 1c by way of an AV output controller 1e. A receiver 1f receives infrared signal from an emitter 3a of the remote controller 3 to transmit the received information to a CPU 1h through a decoder 1g. In the television mode, the necessary change in channel or volume is carried out by the TV circuit 1d in response to the operation at the remote controller 3.

When the CPU 1h detects a mode change from the television mode to the album mode in response to a signal from decoder 1g caused by a mode changing operation at the remote controller 3, the AV output controller 1e is made to transmit a signal from an AV connector 1i to the AV connector 1c in place of the signal from the TV circuit 1d. Further, in the album mode, the CPU responsive to the signal of the decoder 1g transmits control signal from an IEEE 1394 connector 1j to an IEEE 1394 connector 4d of the image storage 4 through the cable 4a designed according to the IEEE 1394 standard.

Thus, the control of the image storage 4 by means of the remote controller 3 for the television set is made possible. For example, if the next still image is requested at the remote controller 3, the request is transmitted through the receiver 1f, the decoder 1g, the TV circuit 1h, the IEEE 1394 connector 1j and the cable 4a to the IEEE 1394 connector 4d of the image storage 4. Then, a CPU 4e connected to the IEEE 1394 connector 4d identifies the request to read out the next image from a memory 4f such as a hard disc. The read image is transmitted through an NTSC (National Television System Committee) encoder 4g, an AV connector 4h and the cable 4b to the AV connector 1i.

Cable 5e designed according to the IEEE 1394 standard is connected between an IEEE 1394 connector 4i of the image storage 4 and the IEEE 1394 connector 5c of the docking station 5. Within the docking station 5, the IEEE 1394 connector 5c directly leads to the signal connector 5d, which is of a specific mechanical shape dedicated to the digital camera 6 although electrically designed under the IEEE 1394 standard. The output of the AC adapter 5e fed with the common power source is connected to the power supply connector 5f. The signal connector 5d and the power supply connector 5f are formed as a single connector unit, while a signal connector 6a and a power supply connector 6c of the digital camera 6 are correspondingly formed as a single connector unit. When the digital camera 6 is mounted on the docking station 5, accordingly, the signal connector 6a of the digital camera 6 is made in contact with the signal connector 5d of the docking station 5, while the power supply connector 6c connected to a rechargeable battery 6b of the digital camera 6 is made in contact with the power supply connector 5f of the docking station 5. Thus, the image signal of the digital camera 6 is transmitted to the TV circuit 4e of the image storage 4 by way of the signal connector

6a, the signal connector 5d, the IEEE 1394 connector 5c, the cable 5b and the IEEE 1394 connector 4i, and the rechargeable battery 6b is charged by the AC adapter 5e.

5           In the television set in First Embodiment, the  
monitor 2 is separated from the main body 1. According  
to the present invention, however, such a modification  
is possible that the main body 1 and the monitor 2 are  
combined within a single housing as in an ordinary  
10 television set.

4e controls devices in the image storage 4 and carries out the functions in the later explained flow charts in Figs. 6 to 8 in cooperation with a CPU 6h of the digital camera 6. The CPU 4e has ROM for storing data such as image data. A card slot 4s is for reading image or audio signal from the card memories, such as COMPACT FLASH, SMART MEDIA and MEMORY STICK, which are the names of products from San Disc of the United States, Toshiba of Japan and Sony of Japan, respectively. A card driver 4p is for driving the card slot 4s in response to the direction of the CPU 4e. The memory 4f is of non-volatility and large capacity, such as a hard disc, which also stores the program to be carried by the CPU 4e.

Alternatively, the memory 4f of built-in type in the embodiment above may be replaced by a removable type such as a DVD.

A memory driver 4n is for driving the memory 4f in response to the direction of the CPU 4e.

An MPEG(Moving Picture Expert Group) decoder 4k is for expanding the motion picture data compressed in accordance with MPEG system for playing the motion picture. A JPEG(Joint Photographic Expert Group) decoder 4t is for expanding the still image data compressed in accordance with JPEG system for playing the still image. A frame memory 4m is a non-volatile semiconductor memory for temporally storing the image or audio signal. The frame memory 4m is used in transmitting the image or audio signal from the digital camera 6, and also in outputting the image data to the main body 1 of the television set or to the printer 9. A switch circuit 4q is for detecting the operation of switches provided in the image storage 4 to inform the CPU 4e of it. Power circuit 4r is connected to the common power source (not shown) for providing each device in the image storage 4 with the electric power.

An IEEE 1394 interface 4j is for communicating

09576291-05200



control signals and image audio signals with various IEEE 1394 interfaces located in the main body 1 of the television set, the digital camera 6 (the docking station 5) and the printer 9, and for receiving a signal from the remote controller 3 of the television set to inform the CPU 4e of it. The IEEE 1394 connectors 4i and 4d is for the connection with cables which connect to various IEEE 1394 interfaces located in the main body 1 of the television set, the digital camera 6 (the docking station 5) and the printer 9. The NTSC encoder 4g is for converting the digital image signal into the television signal of NTSC system, on which the television set without the IEEE 1394 interface is able to play the image. The connector 4h outputs the television signal encoded by The NTSC encoder 4.

Fig. 4 represents a block diagram showing the design of the docking station 5 of First Embodiment. The docking station 5 of First Embodiment is described with help of Fig. 4. The AC adapter 5e connected with commercial power source, which is not shown in the figure, is a power source in order to supply the digital camera 6 mounted on the docking station 5 with electric power, and is also used for charging the rechargeable battery 6b of the digital camera 6.

A DSC connector 5j is a kind of connector connected with a DSC connector 6n arranged in the digital camera 6 and corresponds to the signal connector 5d and the power supply connector 5f shown in Fig. 2. The DSC connector 5j is electrically connected with the AC adapter 5e and the IEEE 1394 connector 5c. Signal transmission and power supply to the digital camera 6 are made through the DSC connector 5j. The signal connector 5d is a terminal for giving and receiving a signal in conformity with the IEEE 1394 standard. The DSC connector 5j has a specific mechanical shape dedicated to the digital camera 6 and also has a terminal electrically connected with an AV connector 5g, which

was not mentioned in Fig. 2.

The AV connector 5g is for outputting the TV signal encoded with the NTSC standard by the digital camera 6. Although no explanation has been made in the First Embodiment, by means of connecting the AV connector 5c with an AV connector of another instrument, a TV signal encoded in the digital camera 6 can be watched by the instrument having no IEEE 1394 interface.

The IEEE 1394 connector 5c is a connector connected with the cable 5b, which is connected with IEEE 1394 interfaces equipped in the image storage 4. In explanation of the First Embodiment, only the case that the IEEE 1394 connector 5c is connected with the IEEE 1394 connector 4i of the image storage 4 is mentioned. However, when the main body 1 or the printer 9 can handle image or audio signal stored in the digital camera 6, the image or audio files can be replayed or printed without help of the image storage 4 by means of connecting the IEEE 1394 connector 5c with the IEEE 1394 interface equipped in the main body 1 or the printer 9.

An LED 5i has an LED 5k for memory and an LED 5m for recharging. The LED 5i indicates the state of a card memory stored in the digital camera 6 and the state of the rechargeable battery by its lighting condition. An LED driver 5h controls lighting of the LED 5i in accordance with a command from the CPU 6h of the digital camera 6 or the CPU 4e of the image storage 4.

Fig. 5 represents a block diagram showing the design of the digital camera 6. The digital camera 6 of the First Embodiment is described with help of the Fig. 5. Although, we omitted the explanation of picture taking and image processing, it is needless to say that the system includes photographic lens, image detector, image processing circuit, and the like. The CPU 6h controls each device in the digital camera 6 and performs the procedure shown in Fig. 26 mentioned later



through the AC adapter 5e of the docking station 5. A card slot 6i records image signals and audio signals onto the card memory (e.g., Compact Flash, Smart Media, Memory Stick) which is mounted to the card slot 6i, and  
 5 reads out image signals and audio signals from the card memory.

A card driver 6j drives the card slot 6i under instruction from CPU 6h. The image storage 4 and the digital camera 6 can be powered on under signal input  
 10 from outside, in the case that imaging storing device 4 is not powered.

(a) Recharging and taking in images flow

FIG. 6 and FIG. 7 are flowcharts illustrating programs executed by the CPU 4e of the image storage  
 15 4. Referring to FIG. 6, program starts when the image storage 4 detects that the digital camera 6 is connected to the docking station 5. The image storage 4 can always communicate with the docking station 5 through the IEEE 1394 connector 4i, the cable 5b, and the IEEE 1394  
 20 connector 5c, because the image storage 4 is always in the state of standing by, passing low current between the docking station 5 and the image storage 4. Therefore, when the digital camera 6 is connected to the docking station 5, The image storage 4 can detect the connection  
 25 between camera 6 and the docking station 5.

Alternatively, the above mentioned detection through the connection between camera 6 and the docking station 5 may be replaced by a detection by means of a combination of a mechanical contact and a sensor.

30 In step S151, function necessary to receive image signals and audio signals from the digital camera 6 is activated. More specifically, the main power is turned on, the memory 4f which records image signals and audio signals is driven, and a receiving program is activated.

35 In step S152, the AC adapter 5e of the docking station 5 is operated through the cable 5a, power is supplied to the digital camera 6, and the main power

source of the digital camera 6 is switched on. In the case that the main power source of the digital camera 6 is already switched on, the main power source continues to be on.

5       The above embodiment may be modified to an alternative embodiment in which the CPU 4e does not transmit the signal to the digital camera 6 for turning on the same if the camera 6 has already be turned on.

10       In step S153, it is detected whether the digital camera 6 has image files or audio files that are reproducible by the image storage 4. If the digital camera 6 has them, program proceeds to step S154. If the digital camera 6 does not have them, program proceeds to step S161 in FIG. 7. The image storage 4  
15       is already set so that JPEG file, MPEG file, GIF file, bitmap file, and WAVE file can be reproduced. Although some digital camera has a proprietary format image, such proprietary image is reproduced only by dedicated software. Furthermore, card memories mounted to the  
20       digital camera 6 may be used for other devices, therefore, other files except for image files or audio files, e.g., document files, may be mounted to the digital camera 6. However, the image storage 4 is designed so that the image storage 4 does not receive  
25       files which can not be reproduced by the image storage 4.

30       By installing a dedicated software in the image storage 4, however, the files that were not handleable with the image storage 4 become handleable with the device. The files that have thus become handleable through the installation of the software will now be automatically received by the device upon the installation.

35       If, provided the card memory is loadable to the digital-camera 6, the camera is not loaded with a card the memory, it is naturally interpreted that no file exists. If the camera is not loaded with a card the memory,

the digital camera 6 is controlled so that the LCD 6q of the digital-camera 6 presents an alarm display that reports to a user that no card-memory exists. Further, if there exists an unhandleable file, the digital camera 6 is controlled so that the LCD 6q of the digital-camera 6 presents an alarm display that reports to a user that there exists an unhandleable file.

At the step S154, a folder to which a name, e.g., date, is attached, is created in a common folder in the memory 4f. The folder is named, e.g., "990401-990402" so that it specifies the initial and last date when the image or audio signal was recorded. The date information is taken from the date information recorded in the header of the image or audio file. The common folder is a folder which is pre-created in the memory 4f and to which files are transferred from the digital camera 6. The files named "Family", "Father", "Mother", and "Taro" are also pre-created in a common folder of the image storage 4.

At the step S155, by blinking the memory indicator LED 5k in the docking station 5, a user is informed that a file is being transferred.

At the step S156, the image or audio files from the digital camera 6 are received in photographing or sound recording order, and stored in the "990401-990402" folder in the memory 4f. Referring to FIG. 8, the way to control signal detection at this step is described in detail below.

At the step S157, such a display as shown in FIG. 11 is presented with the LCD 6q of the digital camera 6, and a users is asked in what folder the file is to be stored. The display presents choosable folders present in the common folder. By revolving the command dial 6s, a folder is chosen, and, by pressing the release button 6r, the folder chosen is indicated.

At the step S158, whether or not a folder has been chosen is detected. If detected, then the step 160 is

followed; if not detected, the step 159 is followed.

At the step S159, whether or not a pre-determined time has passed from the beginning of the inquiry into what folder is to be chosen is detected. If the  
5 pre-determined time has passed, the step 161 is followed; if not, the step 157 is recommenced and the inquiry into what folder is to be chosen is resumed.

At the step S160, the folder "990401-990402" in the common folder is, wholly and without change of its  
10 folder structure, transferred to the designated (chosen) folder.

At the step S161, whether or not the card memory loaded in the digital camera 6 is written is detected. If unwritten, the step S162 is followed; if written,  
15 the step S163 is followed.

At the step S162, by lighting the memory indicator LED 5k in the docking station 5, a user is informed that the card memory loaded in the digital camera 6 is unwritten.

At the step S163, by lighting out the memory indicator LED 5k in the docking station 5, a user is informed that the card memory loaded in the digital camera 6 is written.  
20

At the step S164, the main power supply with the digital camera 6 is switched off. Even when the main power supply with the digital camera 6 had been switched on at the point of connection, the main power supply of the digital camera 6 is switched off at this step.  
25

At the step S165, whether or not the rechargeable battery 6b is loaded in the digital camera 6 is detected. If loaded, the step 166 is followed; if the loaded thing is not the rechargeable battery 6b or the rechargeable battery 6b is not loaded, the step 170 is followed.  
30

In step S166, the charging to the rechargeable battery 6b of the digital camera 6 is started. In step S167, charging the indication LED (light emitting diode) 5m is intermittently energized to inform the user  
35

20250729 09:59

of the status of the rechargeable battery 6b in the process of charging.

In step S168, it is checked whether the charging is completed or not. If the completion of charging is detected, the flow is advanced to step S169. On the other hand, the flow returns to step S166 to continue the charging. In step S169, charging the indication LED 5m is continuously energized to inform the user of the completion of the charging to the rechargeable battery 6b. In step S170, the power supply to the docking station 5 is terminated. In step S171, the main power switch of the image storage 4 is turned off to close the present flow.

#### (b) Transmission of signals

Figs. 8 to 10 explain the manner of controlling signal transmission in step S156 in Fig. 6.

In step S101, disconnection interruption is enabled, the interruption being carried out when the digital camera 6 will be disconnected from the docking station 5. In step S102, it is checked whether or not the digital camera 6 directs to stop the data transmission, the direction being caused by operating the release button of the digital camera 6. If the data transmission is directed to stop, the flow goes to step S110 in Fig. 9. On the other hand, the flow is advanced to step S103 if the data transmission is not directed to stop.

In step S103, the digital camera 6 is checked for a folder (hierarchical) structure that holds files not transmitted yet. If files not transmitted yet are held in a folder structure, the flow is advanced to step S104. On the other hand, the flow is advanced to step S106 if files not transmitted yet are held without any folder structure.

In step S104, it is checked whether the folder structure has already existed in the image storage 4. If the folder structure has existed, the flow is



advanced to step S106. On the other hand, the flow is advanced to step S105 if the folder structure has not existed yet.

5 In step S105, a new folder is further created within the folder "990401-990402" which has been created in step S154 in Fig.6. In step S106, the digital camera 6 is directed to transmit new files, which are received and stored in the folder created in steps S154 and 105.

10 Thus, the folder structure holding files in the digital camera 6 will be took over by the image storage 4 without destruction of the original folder structure, which is convenient for the user to search for the stored files.

15 Further, in step S106, the digital camera 6 is directed to inform the user of the status in the process of data transmission by means of LCD 6q of the digital camera 6.

20 In step S107, it is checked whether the data transmission from the digital camera 6 to the image storage 4 is completed or not. If the completion of data transmission is detected, the flow is advanced to step S108. On the other hand, the flow returns to step S106 to continue the data transmission if the completion of data transmission is not detected.

25 In step S108, the digital camera 6 is directed to add to the header of the transmitted file therein the information indicating that the transmission of the file has been completed. In steps S121 and S122 in Fig. 30 10, the file will be deleted from the digital camera 6 in dependence on the added information. The flow is to be advanced from step S108 to step S109.

35 In step S109, it is checked whether files capable to be treated by the image storage 4 still remain to be transmitted in the digital camera 6. If files remain to be transmitted, the flow is returned to step S102. On the other hand, the flow is advanced to step S116

if no file remains to be transmitted.

If the direction to stop the data transmission is detected in the above mentioned step S102, a question at LCD 6q of the digital camera 6 as in Fig. 11 is made  
 5 in step S110 to ask the user whether or not the transmission of all the files including already transmitted files should be cancelled.

Step S111 checks the answer of the user to the question in step S110 for "No". If the answer, "No" is  
 10 detected, the flow goes to step S116. On the other hand, the flow is advanced to step S112 if the answer, "No" is not detected. The answer, "No" of the user means that the already transmitted files should not be cancelled.

Step S112 checks the answer of the user to the  
 15 question in step S110 for "Yes". If the answer, "Yes" is detected, the flow goes to step S114. On the other hand, the flow is advanced to step S113 if the answer, "Yes" is not detected. The answer, "Yes" of the user means that the user mounts the digital camera 6 on the  
 20 docking station 5 for the purpose of only charging the camera without data transmission. For answering the question, the use is to select "Yes" or "No" by rotating the command dial 6s and press release button 6r to enter the selected answer.

25 In step S114, the files and folder transmitted this time, and also the folder, "990401-990402" created this time are all deleted from the memory 4f of the image storage 4.

In step S115, the digital camera 6 is directed to  
 30 cancel the information which has been add to the header of the transmitted file to indicate that the transmission of the file has been completed.

In step S113, it is checked whether a predetermined  
 35 time has passed or not after the direction to stop the data transmission. If the time has not passed yet, the flow is returned to step S110 to wait for the answer. If the time has passed, on the other hand, the flow is

advanced to step S114 on the assumption that the direction to stop the data transmission at step S102 was made because user mounts digital camera 6 on the docking station 5 for the purpose of only charging the camera without data transmission.

In step S116, it is checked whether a protected file is transmitted or not. If a protected file is transmitted, the flow is advanced to step S117, while the flow is advanced to step S122 if a protected file is not transmitted. The digital camera 6 has a "protection" function of file management for preventing a protected file from being deleted out of the memory card in error. Ordinarily, a protected file cannot be deleted unless the protection function is cancelled.

In step S117, a question is indicated at LCD 6q as in Fig. 11 to ask whether the protected file is to be deleted. Step S118 checks the answer of the user to the question in step S117 for "No". If the answer, "No" is detected, the flow goes to step S122. On the other hand, the flow is advanced to step S119 if the answer, "No" is not detected.

Step S119 checks the answer of the user to the question in step S117 for "Yes". If the answer, "Yes" is detected, the flow goes to step S121. On the other hand, the flow is advanced to step S120 if the answer, "Yes" is not detected.

In step S120, it is checked whether a predetermined time has passed or not after the question is started to be indicated at LCD 6q to ask whether the protected file is to be deleted. If the time has not passed yet, the flow is returned to step S117 to wait for the answer. If the time has passed, on the other hand, the flow is advanced to step S121. In this design, a protected file in the digital camera 6 which has been successfully transmitted to the image storage 4 is to be deleted unless an answer is especially made to the contrary, for always making use of the maximum capacity of the

002250 TEL 24550

memory card in the digital camera 6.

In step S121, all the already transmitted files are deleted from the digital camera 6 in response to the information add in step S108 to the header of the transmitted file. In step S122, files that have been already transmitted and are not protected are deleted from the digital camera 6 in response to the information add in step S108 to the header of the transmitted file and also to the protection information. In step S123, the disconnection interruption is disabled to close the present flow.

(c) Disconnection during data transmission

Fig. 12 explains the disconnection interruption. This flow starts in response to disconnecting the digital camera 6 from the docking station 5 with the disconnection interruption enabled.

In step S181, warning of disconnection without completing the data transmission is made at the display on the digital camera 6 for recommending the user to mount the camera again. Step S182 checks whether such a file exists in the memory 4f that the transmission thereof is unfinished by reason of the disconnection in the course of the data transmission. If such a file exists, the flow is advanced to step S183, while the flow goes to step S184 if such a file does not exist.

In step S183, the file in the memory 4f that the transmission thereof is unfinished is removed. Step S184 checks whether the digital camera 6 is mounted again on the docking station 5 for the connection. If the connection is detected, the flow is advanced to step S187, while the flow goes to step S185 if the connection is not detected.

Step S187 checks whether the digital camera mounted again is the same digital camera 6 or not. In the case of the same digital camera 6, the flow is advanced to step S109 in Fig. 8, while the flow goes to step S152 in Fig. 6 in the case of a different digital

002250 1224550

camera.

In step S185, it is checked whether a predetermined time has passed or not after the disconnection. If the time has passed, the flow is advanced to step S186, while  
 5 the flow returns to step S184 if the time has not passed yet. In step S 186, the main power switch of the image storage 4 is turned off to close the present flow.

In the above mentioned First Embodiment, all the correctly transmitted files are deleted from the  
 10 digital camera 6 at once after completing the transmission of all of them. However, such a modification is possible that each file is deleted after completing the transmission of it one by one. Further, the file is actually deleted from the digital camera  
 15 in First Embodiment. However, it is possible to merely add information of permitting the deletion to the header of the file to be deleted in place of actually deleting the file, in the case of a digital camera capable of overwriting a new file on the file to be deleted.

20 Such a modification is further possible that the main body 1 of television set is designed to be capable of detecting the mounting of the digital camera 6, in place of the detection by the image storage 4 in First Embodiment.

25 The functions of flow charts, which is carried out by the CPU 4e in the image storage 4 according to the above mentioned embodiment, can be alternatively carried out by the CPU 1h in the main body 1 of the television set.

30 (d) Modification of the function on disconnection during data transmission

The CPU 6h in the digital camera 6 can alternatively carry out the functions of flow chart shown in Fig. 8 on the disconnection during data  
 35 transmission. Fig. 13 explains this modification in which the CPU 6h in the digital camera 6 carries out the functions.

In step S501, the disconnection interruption is enabled, the interruption being carried out when the digital camera 6 will be disconnected from the docking station 5. The disconnection interruption can be understood in accordance with Fig. 12.

In step S502, it is checked whether or not the digital camera 6 directs to stop the data transmission, the direction being caused by operating the release button of the digital camera 6. If the data transmission is directed to stop, the flow goes to step S510. On the other hand, the flow is advanced to step S503 if the data transmission is not directed to stop.

In the step S503, it is checked whether the structure of the folder in which such a file is stored that the transmission thereof is unfinished has hierarchical structure or not. If the folder has hierarchical structure, the flow is advanced to the step S504, otherwise the flow is advanced to the step S506.

In the step S504, it is checked whether the folder found in the step S503 has already existed in the image storage 4 or not. If the folder has existed, the flow is advanced to the step S506, otherwise the flow is advanced to the step S505.

In the step S505, an order is given to the image storage 4 that a new folder is to be made inside of the folder "990401-990402" made in the step S154 shown in the Fig. 6, which exists in the memory 4f of the image storage 4.

In the step S506, it is ordered that the file that the transmission thereof is unfinished is transmitted to the image storage 4, and is stored in the folder made in the steps S154 and S505. Therefore, when the file is stored in the hierarchical folder of the digital camera 6, it is convenient to rearrange the file because the recording onto the image storage 4 does not affect the structure of the folder. Further, in the step S506, the digital camera 6 is directed to inform the user of

the status in the process of data transmission by means of LCD 6q of the digital camera 6.

In the step S507, it is checked whether the transmission of the file to the image storage 4 has been  
 5 completed or not. If the transmission has been completed, the flow is advanced to the step S508, otherwise the flow is advanced to the step S506 for continuing the transmission. When the transmission  
 10 storage 4 transmits the completion signal to the digital camera 6.

In the step S508, the information indicating the completion of the transmission is added to the header portion of the file inside of the digital camera 6. In  
 15 the steps S521 or S522 shown in the Fig. 15, the file is deleted in accordance with the added information. Then, the flow is advanced to the step S509.

In the step S509, it is checked whether a transmission-unfinished file being able to be handled  
 20 by the image storage 4 is still existed in the digital camera 6 or not. If a transmission-unfinished file is existed, the flow is returned to the step S502, otherwise the flow is advanced to the step S516.

In the step S510, a query whether all the  
 25 transmission of files including transmission-completed files should be cancelled is provided for the user on the LCD 6q of the digital camera 6 shown in Fig. 11.

In the step S511, it is checked whether "no" is detected as the answer of the query provided in the step  
 30 S510. If "no" is detected, the flow is advanced to the step S516, otherwise the flow is advanced to the step S512. In the case "no files should be left as it is.

In the step S512, it is checked whether "yes" is detected as the answer of the query provided in the step  
 35 S510. If "yes" is detected, the flow is advanced to the step S514, otherwise is advanced to the step S513. In the case "yes" is detected, it is understood that the

In the step S514, it is ordered that the file and the folder transmitted this time, together with the folder "990401-990402" should be deleted from the memory 4f of the image storage 4.

In the step S513, it is checked whether a predetermined time has passed or not after the direction to stop the data transmission. If the time has not passed yet, the flow is returned to the step S510 to wait for the answer. If the time has passed, on the other hand, the flow is advanced to the step S514 on the assumption that the direction to stop the data transmission at the step S502 was made because user mounts the digital camera 6 on the docking station 5 only for recharging the camera without data transmission.

In the step S517, a question is indicated at the LCD 6q as in Fig. 11 to ask whether the protected file is to be deleted.

In the step S518, it is checked whether the answer  
35 of the question in the step S517 is "Yes". If the answer  
"Yes" is detected, the flow is advanced to the step S522.  
If the answer "Yes" is not detected, on the other hand,



In the step S519, it is checked whether the answer of the question in the step S517 is "No". If the answer "No" is detected, the flow is advanced to the step S521.

In the step S520, it is checked whether a predetermined time has passed or not after the question is started to be indicated at the LCD 6g to ask whether the protected file is to be deleted. If the time has not passed yet, the flow is returned to the step S517 to wait for the answer. If the time has passed, on the other hand, the flow is advanced to the step S521. In this design, a protected file in the digital camera 6 is not to be deleted unless an answer is especially made to the contrary.

In the step S522, all the already transmitted files are deleted from the digital camera 6 in response to the information added in the step S508 to the header of the transmitted file. In the step S523, the disconnection interruption is disabled to close the present flow.

Operation of the image storage 4 performed by the remote controller 3 is explained specifically. FIG. 16 illustrates the remote controller 3 in detail. When the main body 1 is on standby after receiving a very small current, the main power of the main body 1 is turned on by pressing a power source bottom 3a of remote controller 3.

FIG. 17 is a flow chart showing the basic operation of the main body 1 after main power is turned on. When

the main power is turned on in step S1, the main body 1 always starts up in the television mode in step S2. Even if the main power of the main body 1 is turned off in the last mode, as described later, by turning on the main power again, the main body 1 can start up in the television mode. The television mode is a mode in which the television set receives ordinary television broadcasting. Step S3 enables interruption by means of mode change operation, which switches a mode to another mode such as the album mode. Step S4 enables interruption by means of turning off the main power. The flow is advanced to step S5.

In step S5, the operation in the television mode is performed. Information stored in the digital camera 6 is displayed on the monitor 2 for predetermined time (e.g. 5 seconds), superimposed on the current television image. The information of the digital camera 6 displayed on the monitor 2 is as follows: for example, whether or not the digital camera is placed on the docking station 5; a state that digital still image is being transferred from the digital camera to the image storage 4; or a state that the digital camera 6 is being recharged.

FIG. 18 is a basic flow chart showing operation in the album mode. When an album mode button 3b of remote controller 3, shown in FIG. 16, is pressed, mode change interruption is performed in step S6 in FIG. 18. In step S7, it is determined whether mode change is the album mode in step S7. If mode change is the album mode, the flow is advanced to step S8. If mode change is not the album mode, the flow is advanced to a flow in another mode.

In step S8, the operation that enables the mode change interruption is performed. The mode change interruption is necessary for changing mode from the album mode to another mode. In step S9, operation that enables main-power-off interruption is performed. The

main-power-off interruption is necessary for turning off main power.

In step S10, it is determined whether the image storage 4 is on standby after receiving very small current. When it is determined that the image storage 4 is on standby, the flow is advanced to step S11. In step S11, it is instructed that the power source of the image storage 4 is turned on, and the image storage 4 starts up. In step 12, the operation that enables data read out completion interruption is performed. The data read out completion interruption is necessary for reading out data.

On the other hand, in step S10, when it is determined that the image storage 4 is not on standby, the flow is advanced to step S13. In step S13, a message " Turn on the image storage 4" is indicated, and the flow is advanced to step S14. In step S14, it is determined whether print information is included or not. When the image storage 4 is turned on, the flow is advanced to step S15. In step S15, the message "Turn on the image storage 4" is closed, and the flow advances to step S12.

The above embodiment may be modified to an alternative embodiment in which the CPU 1h of the main body 1 transmits a control signal to the image storage 4 for turning on the same when the main power of the main body 1 is turned on.

In step S16, in order to avoid the state of no sounds in the album mode, background music starts, resulting in natural feeling.

The background music number is arbitrarily selected from music numbers that have been already selected. Instead of using the background music, it is possible to use television sound directly. It is also possible to perform the album mode in a state without sound, that is, completely in no sound state. Each of these states is arbitrarily selectable.

In step S171, it is determined whether an image is stored in the frame memory 4m or not. The image is stored in the frame memory 4m in step S87 in FIG. 28. If the images are stored, the flow is advanced to step  
 5 S172, if not, the flow is advanced to step S174.

In step S172, the image stored in the frame memory 4m in step S87 in FIG. 28 is read out, and is displayed on the monitor 2. The image stored in the frame memory 4m, which is a semiconductor memory, is read out  
 10 instantly and displayed. Accordingly, the period between the time when mode is changed to the album mode and the time when the image is displayed on the monitor 2 can be made very small, so that an operator can view the image comfortably.

15 In step S173, instruction is transmitted to the memory driver 4n, and the memory 4f starts, and the flow is advanced to step S18.

When it is determined that the image is not stored in the frame memory 4m, in above-mentioned step S171, a menu image of the album mode, which is stored in ROM in advance, is read out and displayed in step S174. The ROM, which is located in the CPU 4e in the image storage 4, is a semiconductor memory. The menu image stored in ROM can be read out instantly and displayed.  
 20

25 In step S175, the memory 4f is driven after instruction is transmitted to the memory driver 4n. In step S176, a regenerative program for image and sound is activated and the flow is advanced to step S17.

In step S17, the first image in the latest folder that is stored into the image storage 4 is reproduced, and is displayed on the screen of the main body 1. That is, the image selected according to a predetermined rule is reproduced by the image storage 4 and displayed automatically, in response to change from the current  
 30 mode to the album mode.  
 35

With regard to the image selected according to the predetermined rule, in stead of using the first image

in the latest folder, for example, the image of the latest date of photograph that is captured into the image storage 4 may be used. Thus, the album mode is started up, and then the flow is advanced to the album mode operation in step S18.

Furthermore, in step S174, in stead of above-mentioned operation, it is possible to continue to display in the television mode, and to change to the album mode after reproduction of the image in step S17.

By performing the flow in FIG. 19, it is possible to change the present mode to the album mode while the image storage 4 is taking the images from the digital camera 6. It is also possible to mount the digital camera 6 on the docking station 5 in order to take the images from the digital camera 6 into the image storage 4 while main body 1 is being used in the album mode.

When image acquisition from the digital camera 6 to the image storage 4 is completed before a mode is changed to the album mode, the flow of FIG. 19 is not performed because the first image in the last folder is already displayed in step S17 in FIG. 18.

On the contrary, when image acquisition from the digital camera 6 to the image storage 4 is completed after mode is changed to the album mode, interruption is performed in step S19 in FIG. 1. And the message "the last folder of image files is taken in" is indicated on the monitor 2, being superimposed on the current picture. The indication is being displayed until a counter measures a predetermined time, for example, about 7 seconds, and ends at step S22. In the album mode, the above-mentioned operation works without exception. A user who watches the message can view a new image in the last folder by the operation described later.

FIG. 20 shows the details of the album mode operation in step S18 in FIG. 18. When the image is displayed in step S17 in FIG. 18 responsive to the change to the album mode, the flow of the album mode starts

at step S24, subsequent to which steps S25 - S30 follow. In step S25 to step S30, various interruptions are possible as described below, and the process becomes standby at step S31. The operation time from the press  
 5 of a channel button 3c in FIG. 16 to step S31 in FIG. 20 is extremely short.

To advance the image displayed on the monitor 2, the "+" button or the "-" button of the channel button 3c in FIG. 16 is operated. The operation of advancing  
 10 the image displayed on the monitor 2 is shown in FIG. 21. When the image is displayed on the monitor 4, if the button 3c is pressed, picture-advance interruption is performed in step S32 in FIG. 21 and the process advances to step S33. In step S33, it is determined  
 15 whether or not pressing of the button 3c is advancing the picture. If the "+" button of the channel button 3c, which is for advancing a picture, is pressed, then it is determined that the pressing of the button 3c is advancing the picture and the process advances to step  
 20 S34. In step S34, and it is determined whether or not the last picture before pressing the "+" button is the last picture in the folder. If the last picture before pressing the "+" button is not the last picture in the folder, then the process advances to step S35. After  
 25 one picture is advanced in step S35, the process advances to step S36 and returns.

If the last picture before pressing the "+" button is the last picture in the folder in step S34, then the process advances to step S36 because there is not any  
 30 picture to advance, and returns in step S36. Accordingly, when the picture is the last picture in the folder, if the "+" button is pressed, any operation does not occur.

In step S33, if the "-" button of the channel button 3c is pressed, then it is determined that the  
 35 pressing of the button 3c is not advancing the picture, and that the pressing of the button 3c is returning back the picture, and the process advances to step S37.

In step S37, it is determine whether or not the last picture before pressing the channel button 3c is the first picture in the folder. If it is determine that the last picture before pressing the channel button 3c is not the first picture in the folder, then one picture is returned back in step S38 and the process returns in step S36. If the last picture before pressing the channel button 3c is the first picture in the folder, the process advances to step S36 because it is not necessary to return back the picture any more, and returns. Accordingly, when the last picture before pressing the channel button 3c is the first picture in the folder, if the "-" button is pressed, then any operation does not occur.

Although it is considered that the first picture and the last picture in the folder are in the same folder, it is possible to make them to be the first picture and the last picture in all pictures in the image storage 4. In this case, when the first picture in the last folder is displayed on the monitor 2, if the "-" button of the channel button 3c is pressed, the last picture in the folder previous to the last folder is displayed.

If pressing the "-" button of the channel button 3c is repeated, the first picture in the first folder of the image storage 4 appears on the monitor 2. Thus, even if the user does not know an operation for changing hierarchy as described later, the user can view all pictures in the image storage 4.

FIG. 22 shows various kind of indication displayed on monitor 2. G1 and G2 are pictures that are displayed on monitor 2. When the picture G1 is displayed on the monitor 2, if the "+" button of the channel button 3c is pressed, then the picture G2 that is the next picture of the picture G1 is displayed. When the picture G2 is displayed on the monitor 2, if the "-" button of the channel button 3c is pressed, then the picture G1 that is the previous picture of the picture G2 is displayed.

5

10

15

20

35



When the indication is displayed on the monitor 2, if the volume button 3d is operated, hierarchy change interruption is performed in step S39. When the "+" button of the volume button 3d is pressed, it is 5 determined that a transfer to the upper hierarchy is instructed in step S40, and the process advances to step S41. In step S41, it is determined whether or not the displayed hierarchy before the volume button 3d is pressed is the calendar year. If the displayed hierarchy 10 is not the calendar year, then the process advances to step S42. In step S42, one hierarchy is stepped up, and the process advances to step S43 and returns.

For example in Fig. 22, when the picture G1 is displayed, if the "+" button of the volume button 3d is pressed, then the thumbnail S1 is displayed instead of the picture G1. In this case, the small picture G1 is placed in the upper left corner of the screen, and small picture G2 is placed on the right of the G1. Other seven pictures are arranged according to this order, and the ninth picture is arranged in the lower right corner of the screen. Alternatively, it is possible to arrange the G1 picture in the center of the screen.

In step S41, if it is determined that the displayed hierarchy is the calendar year, then, even if the "+" button of the volume button 3d is pressed, nothing happens because the calendar year is the highest hierarchy and there is no hierarchy ahead of the calendar year.

In step S40, if the "-" button of the volume button 3d is pressed, then it is determined that a transfer to the upper hierarchy is not instructed, and the process advances to step S44. In step S44, it is determined whether or not the displayed hierarchy before the volume button 3d is pressed is the picture. If the displayed hierarchy before the volume button 3d is pressed is not the picture, then the process advances to step S45. In step S45, one hierarchy is stepped down,

35

and the process advances to step S43 and returns. For example in Fig. 22, the hierarchy transfers to the thumbnail (S1) from the folder (F1). In this case, nine thumbnails of the thumbnail (S1) are contained in the  
 5 head of the folder that is located in the upper left corner of the screen

In step S44, if the displayed hierarchy before the volume button 3d is pressed is the picture, then even if the "-" button of the volume button 3d is pressed,  
 10 nothing happens because the picture is the lowest hierarchy and there is no hierarchy under the picture. And in step S43, the process returns.

Fig. 24 is a flow chart that shows the operation of Stepping down of the hierarchy is also performed in  
 15 the selective flow shown in Fig. 24, in stead of using the hierarchy change interruption. For example, when the thumbnail S1 is displayed, if a "2" numeral button 3e is pressed, a frame of the monitor 4 is changed to the picture G2, because the numeral buttons 3e from "1" to "9" correspond to the positions of nine dividend areas on the monitor 4, respectively. By pressing one of the numeral buttons 3e, the corresponding area on the monitor 4 is selected. In Fig. 22, the thumbnail of picture G1 is located at the center of the upper row,  
 20 and this position corresponds to the "2" numeral button. These operations are described in detail in Fig. 24.

Fig. 24 is a flow chart that shows the operation of selection in which the calendar year Y2 is used as a clue to search a picture.

30 When the picture is searched, for example, in the year 1988, a "6" numeral button is pressed because the year 1988 is located at the right in the middle row of the calendar year index Y2. By pressing the "6" button, selection interruption starts in step S46. In step S47,  
 35 it is determined whether or not the present hierarchy is the picture. If it is determined that the present hierarchy is the picture, then any operation is not

002250" T2294550

5        Since the hierarchy is the calendar year, the process advances to step S48 from step S47. In step S48, by pressing the "6" numeral button, all folders created in 1988 are selected and arranged in order according to the creation date.

25           In steps from S53 to S56, operation that adds a  
process history to each picture is performed. In step  
S51, it is determined whether or not the stepped down  
hierarchy is the picture. If it is determined that the  
stepped down hierarchy is the picture, then the process  
30       advances to step S53. In step S53, it is determined  
whether the mode is my-album mode, which is described  
in detail later.

If it is determined that the mode is not the my-album mode, then the process advances to step S54. In step S54, the date and time of picture selection is written in the header portion of the picture, and the process advances to step S55. In step S55, a search

history until the picture is displayed and other selection conditions are written in the header portion of the picture. This information is used as clues to search the same picture later. For example, the same  
 5 picture can be searched by the search condition of "the image viewed one week ago"

In step S53, if it is determined that the mode is the my-album mode, then the process advances to step S56. In step S56, personal information, for example,  
 10 a name of a person who searched the picture previously, is written in the header of the picture. This information is used as a clue to search the same picture. In step S49, if it is determined that the hierarchy is not any of the calendar year, the folder or the thumbnail,  
 15 then the hierarchy is considered to be irrelevant to the predetermined hierarchy, and selection process necessary to select the thing is performed in step S57. For example, typical thing is the personal information in the my-album mode.

20 Fig. 25 is a flow chart that shows the operation of my-album mode. Pressing a menu button 3f of the remote controller 3 displays the nine dividend areas on the screen to which the numbers from "1" to "9" are attached. The nine numbers can be replaced with, for example,  
 25 personal names of a family by an adequate input device.

In step S56, my-album interruption starts by pressing the menu button 3f. In step S57, the numbers from "1" to "9" are attached to the nine areas on the screen. Each of the nine areas having the numbers from  
 30 "1" to "9" is arranged at the same position as each of the numeral buttons 3e from "1" to "9," respectively. In step S58, the flow returns, and becomes a standby sate for operation of the numeral buttons 3e.

For example, when the operator is a father and is  
 35 designated with the number "1", if the "1" of the numeral buttons 3e is pressed, steps from S46 to S49, step S57 and step S52 are executed in Fig. 24. After that, if

the picture is selected, then information on father is written in the header of the selected picture through step S51, step S53 and step S56.

Fig. 26 is a flow chart that shows the operation of retrieval. When a selection button 3g of the remote controller 3 is pressed in Fig. 16, retrieval interruption starts in step S59 in Fig. 26, and a retrieval conditions entry screen is displayed in step S60. By operating the selection button 3g adequately, it is possible to change a retrieval category that is indicated in the retrieval conditions entry screen in step S61. To input the retrieval condition such as the date, the numeral buttons 3e is used in step S62.

When the retrieval conditions are determined, pressing a conclusion button 3h advances the process from step S63 to step S64. Since steps from S61 to S63 are repeated every predetermined time while storing the last operation result, it is possible to repeat changes in step S61 and S62 as long as the conclusion button 3h is not pressed.

In step S64 retrieving is performed and the resultant folder is created. In step S65 a retrieved result is displayed in a form such as the thumbnail index S1 in Fig. 22. If more than nine images have been retrieved or retrieve conditions contain the hierarchy, retrieved results are separated adequately to a plural of folders, being displayed like the folder index F1 in Fig. 22. In steps from S66 to S69, information for later retrieval is written in the headers of retrieved images, and the process advances to step S70 and returns.

Fig. 27 is a flow chart that shows the operation of printing. In the case where an image is displayed on the monitor 2, when the user desires to print the image, pressing the conclusion button 3h starts print interruption in step S71 in Fig. 27. When the image is not displayed on the monitor 2, if the conclusion button

3h is pressed, any operation is not performed, and the process advances to step S78 from step S72 and returns. When the image is displayed on the monitor 2, if the conclusion button 3h is pressed, then the process  
 5 advances to step S73.

In steps from S73 to S75, information for later retrieval is written in the header of the image. In step S751, it is determined whether or not the header of the image has print information. If the header of the image  
 10 has not the print information, then the process advances to step S76. In step S76, information to print is written in the header of the image. In step S77, a message "printing has been received" is superimposed on the screen of the monitor 2.

15 In step S751, if the header of the image has the print information, then the process advances to step S752. In step S752, information written in the header of the image is deleted. In step S753, the superimposed message "printing has been received" is deleted, and  
 20 the process advances to step S78 and returns. These steps from S751 to S753 are performed when a different image is retrieved. The execution of printing is performed all together when the album mode is finished.

Fig. 28 is a flow chart that shows the operation  
 25 of an album mode completion mode. The album mode finishes when a change operation to other mode is performed, or when the main power of the image storage 4 is turned off carelessly. For example, when the album mode button 3b is pressed to change to the television  
 30 mode from the album mode, when a video-1 button 3j is pressed to change to a video-1 mode, or when the main power switch of the image storage 4 is operated, the mode change interruption starts in step S79 in Fig. 28.

In step S80 and step S81, the same processes as  
 35 the processes in step S7 and step S8 in Fig. 18 are performed. In step S91, it is determined whether the album mode change flow is started by changing to other

00220"05200

mode or by turning off the main power. If the album mode change flow is started by changing to other mode, then the process advances to step S82. In step S82, it is determined whether or not there is an image having printing information. If it is determined that there is an image having printing information, then a thumbnail index like S1 in Fig. 22 is displayed in step S83.

Then, when the conclusion button 3h of the remote controller 3 is pressed, printing is performed and information that printing has been performed is written into the header of the image in step S85. In step S86, changing to designated mode is performed. Since moving to step S86 from step S85 is performed just after printing is instructed, real printing action is performed in the background of other mode, for example, during viewing TV program.

In step S82, if there is not any image having printing information, then the process advances to step S86. In step S84, if the menu button 3f of the remote controller 3 is pressed instead of the conclusion button 3h, then printing is held in step S90, and the process advances to step S86.

In step S90, information that printing is put on the shelf is written in the header of each image. After this time, a message that printing is not performed is indicated for the predetermined time at such a time when the power of the main body is turned on, or when the mode is changed. This indication is repeated until printing of each image is performed, or the delete of printing is performed.

In step S87, a displayed image is stored in the frame memory 4m. The reason why the displayed image is stored in the frame memory is to retain the same state of the album mode before being changed to other mode when the mode is changed back to the album mode again. After this process, the printing action is performed

in parallel in the background of the designated mode.

In step S89, to lower power consumption, the memory 4f of the image storage 4 is stopped and the mode is changed to a power saving mode. The reason why the power saving mode begins after the predetermine time is as follows. If the mode is changed to other mode carelessly, the mode may immediately return to the image storage mode. In this case, if the memory 4f is halted every time, and driven again, it is not convenient because it takes a considerable time to become the album mode. And it is not desirable that the memory 4f is overdriven.

In step S93, information on print holding is written in the header of each image. On such a time when the power of the main body is turned on or the mode is changed, a message that there is an image not printed is displayed for the predetermined time. This indication is repeated until printing is executed or printing is deleted.



such as the halt of the memory 4f of the image storage 4 is performed.

All functions of the printer 9, which includes the on-off switch of the power source, are controlled by the image storage 7. The CPU 1h of the image storage 7 receives instructions, which controls the printer 9, from the remote controller 3 through the main body 1, transmitting the received instruction to the printer 9. The CPU 1h refers a state of the image storage 7 and devices connected to the image storage 7, thereby permitting the instructed control, determining an output timing and executing the control.

Furthermore, the system has the following advantages. That is, the printer can be operated in consistent with an operation and a state of another device. When the image storage 7 is operated, the image storage 7 does not need a special remote controller, but needs only the remote controller 3 that is common to other devices. Furthermore, the system is convenient to use, since the remote controller 3 always controls another device only through the main body 1, without reference to the kind of the controlled device. Accordingly, since other devices besides the main body 1 do not receive a signal from the remote controller 3, the system does not have a limit that there must not be an obstacle between the signal receiving part of the device and the remote controller 3.

[Second Embodiment]

Fig. 29 is a schematic view that shows the Second Embodiment of the present invention. Fig. 30 a block diagram that shows the configuration of the Second Embodiment.

Referring to Fig. 29, a modem 10 for telecommunication and a telephone 11 are added to the configuration of the First Embodiment in Fig. 1, and an image storage 7 and the digital camera 8 in the Second Embodiment are different from the image storage 4 and

the digital camera 6 in the First Embodiment. Other devices besides these four devices in the Second Embodiment are the same as the devices in the First Embodiment. In the configuration of the Second Embodiment, although the telephone 11 is connected to the image storage 7 through the modem 10, this connection is also possible in the configuration of the First Embodiment in Fig. 1.

In the Second Embodiment of the present invention, an AC adapter that feeds power to the digital camera 8 through a cable 8a is built in the image storage 7. The cable 8a is a special standard cable, including a power supplying cable and a signal transmitting cable, which connects the digital camera 8 with the image storage 7. The image storage 7 in the Second Embodiment is for general-purpose use the same as the image storage 4 in the First Embodiment. The cable 8a for the digital camera 8 is the only exclusive product in the Second Embodiment. Connecting the digital camera 8 with the image storage 7 by the cable 8a causes the digital camera 8 automatically to charge power and to transmit data.

Referring to Fig. 30, the digital camera 8 has a special standard terminal 8c that is a combined terminal of a charging terminal and a signal terminal that is in conformity with the IEEE 1394. The signal terminal of the special standard terminal 8c is connected to the circuit system of the digital camera 6, and the charging terminal of the special standard terminal 8c is connected to a rechargeable battery 6b. The cable 8a, which is connected to the special standard terminal 8c, is a special standard cable that is a combined cable of the charging cable 8d and a signal cable 8e that is in conformity with the IEEE 1394.

The image storage 7 has a special standard terminal 7i that is a combined terminal of a charging terminal and a signal terminal that is conformity with the IEEE 1394 standard. The charging terminal of the special

standard terminal 7i is connected to an AC adapter 7j, and the signal terminal of the special standard terminal 7i is connected to a IEEE 1394 terminal 7k.

As described above, the image storage 7 is a  
5 general-purpose product that may be used for various kinds of digital cameras. The considerable amount of digital cameras, however, are driven by different power-supply voltages. Therefore, the AC adapter 7j is constructed to be able to select a plural of voltages.  
10 A CPU 7e of the image storage 7 detects information on the power-supply voltage of the digital camera 8 through the terminal 8c, the signal cable 8e, terminal 7i and the IEEE 1394 terminal 7k. Then, the CPU 7e controls the AC adapter 7j to output a power-supply voltage  
15 suitable for the digital camera 8 according to the detected information. Thus, by making only the terminal 8c adopt the special standard, it is possible to apply different power-supply voltages to digital cameras.

In the system as shown in Fig. 30, the IEEE 1394  
20 terminal 7m is coupled with the printer 9. Although the modem 10 is omitted in Fig. 30, it is really possible to add the modem 10 to the system in Fig. 30. Explanations of other things besides the modem 10 in Fig. 30 are omitted because they are the same as in Fig. 2.

25 According to the Second Embodiment of the present invention, when transmitting and storing the entire image data in one holder into the image storage 7 is completed, all thumbnails contained in this holder are displayed on a monitor 2. An arbitrary thumbnail in the  
30 holder is selected as the thumbnail representing the folder, and the folder's name is assigned to the selected thumbnail. The first image of the folder is, usually, selected as the representative image. Display of thumbnails and selection of the representative image  
35 may be made independent of transmitting and storing image data from the digital camera 6 to the image storage 7, and may be performed after completion of the

transmitting and storing.

The remote controller 3 as shown in Fig. 31 has a menu button 45, and a selection button 46 that is used to search a folder or an image from the image storage 7. Since the menu button 45 and the selection button 46 are not comprised in the First Embodiment, the remote controller 3 in the Second Embodiment is not the same as the remote controller 3 in the First Embodiment. The remote controller 3 in the Second Embodiment is used to select a menu displayed on the monitor 2 and to perform the menu. The remote controller 3, as a matter of course, is also used for viewing TV programs. The operation buttons of the remote controller 3, therefore, are used for selecting and performing the menu, and viewing TV programs.

#### <Selecting Mode >

By turning on the main switch, a main body 1 of the present embodiment starts in the television mode in the Second Embodiment as well as in the First Embodiment, and mode selection interruption is enabled. Then, TV mode processing is performed and it becomes possible to receive TV program. When the menu button 45 (Fig. 31) of the remote controller 3 is pressed, the mode selection interruption is performed in the main body 1.

Fig. 32 is a flow chart that shows the operation of mode selection processing. The CPU 1h of the main body 1 performs the mode selection processing. By pressing the selection button 45, the "Mode Selection" page at page 50 as shown in Fig. 33 is superimposed on the TV program image on the monitor 2 (S301). The displayed " Mode Selection " page 50 includes a TV operating menu 51 in addition to a mode selection menu 52. The TV operating menu 51 is a menu for normal operation of the main body 1 on view of a TV program, and a selected item in the TV operating menu 51 is processed in the main body 1. A part of the menu such

002250" 1229/550

The mode selection menu 52 contains three option items, "Album Mode", "Print Mode" and "Return to Television Mode". The "Album Mode" and the "Print Mode" are used for operating the image storage 7. Selecting these two option items makes the image storage 7, which communicates with the printer 9, execute the process of the "Album Mode", the "Print Mode", or the on-off of the power source.

In step S302, it is determined that the selected item is which item of three items. If the selected item is the "Return To Television", then the process advances to the process of the television mode processing in step S303. If the selected mode is the album mode or print mode, then the process advances to step S304. In step S304, the power of the image storage 7 is set on, and process advances to step S305.

Fig. 34 is a flow chart that shows the operation of the album mode (i.e., the operation of the image storage 7).

Selecting the "Album Mode" in the "Mode Selection" page as shown in Fig. 33 makes the CPU 7e of the image

The thumbnail 30 of the representative image of folder is arranged in order of the folder number that is assigned to each folder as shown in Fig 35. Since the user can select the desired folder after identifying the thumbnail of the representative image, he can surely select the desired folder.

The listing of information on all folders displayed on the monitor 2 are arranged in decreasing order of the date of photography, regardless of when folders are created, that is, regardless of whether folders are created at the time of shooting or at the time of storing information in a memory 47. The desired folder can be selected by pressing the selection button 46 of which number is same as the folder number and determined by pressing the conclusion button 47 (S205).

The listing of information on all folders displayed on the monitor 2 also includes condition for  
35 sort. The condition for sort can be determined by pressing the conclusion button 47 after the target folder is selected by pressing the selection button 46

of the remote controller 3.

By the above-mentioned selecting operation, the representative image corresponding to the selected desired folder is distinguished from other images in a manner that the representative image is bordered, or  
5 displayed brightly.

Furthermore, the "Folder / Image Search" item in the page "Information on All Folders" can search an image or a folder as necessary from the data of images or folders stored in the image storage 7. To search  
10 images using the "Folder / Image Search" item in the page "Information on All Folders", the number "0" is selected by using a channel button 43. (S202)

When the desired folder is determined in step S205 or step S202, compressed image data stored in the  
15 selected folder is read in the frame memory 4m and converted to analog data. The converted analog data is displayed as an image containing nine small images, on the screen of the monitor 2 (S207). Fig. 36 is an explanatory drawing that shows the displayed page  
20 "Images in a folder" in step S207.

The page "Images in a folder" in Fig. 36 is opened from the page "Information on All Folders" in Fig. 35 using the remote controller 3 as follows. The remote  
25 controller 3 has numeral buttons to select TV programs. The numeral buttons 48 of the most widely used remote controller has the arrangement of 4 x 3 as shown in Fig. 31. In the embodiments of the present invention, nine numeral buttons from 1 to 9 are used.

When the image storage 7 displays the thumbnails on the monitor 2, the thumbnails are placed in the same arrangement as that of the numeral buttons 48. A thumbnail is selected by pressing the numeral button located at the same position as the target thumbnail.  
30

Each image in a folder, which is designated as a target image that is read out from the data stored in the image storage 7, has a series of number. This number  
35

002250" 1229/560

is displayed together with each thumbnail. If the operator selects a thumbnail image, which is not displayed on the monitor 2, by designating the number of the thumbnail with the channel button 43, the thumbnail image can be displayed jumping to the corresponding folder.

In the present embodiment, although the remote controller has twelve numeral buttons, the present invention is not limited to the remote controller having twelve numeral buttons. In the future, it is expected that the number of selectable TV channel will increase because of the tendency that multi-channel TV broadcasting is widening. Therefore, selecting images by the remote controller for multi-channel TV is effective in selecting stored images.

In step S202 in Fig. 34, if it is determined that "Folder / Image Search" is selected, then the process advances to step S203 and search condition setting is performed. After the search condition setting, searching is performed in step S204 and the process advances to step S207. The search condition setting in step S203 will be described later in Fig. 37.

Then, the operation of selecting one of images displayed on the monitor 2, as shown in Fig. 36, and viewing the image will be explained herein later.

In step S208, the desired thumbnail is selected from thumbnails displayed in step S207. The desired thumbnail is selected by using the selection button 46 of the remote controller 3 and determined by pressing the conclusion button 47. Then process advances to step S209. In step S209, the image data corresponding to the determined thumbnail is read out from the memory 7f and stored in a frame memory 7m. In step 210, the selected image is displayed after the image data is converted to analog data. In step S207, if the desired thumbnail is not found in the first frame screen, which includes nine thumbnails, the next frame screen is displayed by



using a volume button 42 (S211). Thus, the desired image is read out from the memory 7f and it is possible to view the desired image on the monitor 2.

In step S211, if it is determined that the viewed  
5 image is printed, then printing the image is selected by pressing the "Print Mode" button displayed on the frame screen, using the selection button 46 of the remote controller 3, and determined by pressing the conclusion button 47.

10 Although it is described that the printer 9 is powered on when the print mode is selected referring to Fig. 32, the printer 9 may be powered on if the power of the printer 9 is off when printing is instructed in step S211, as shown in step S211 to S213 in Fig. 34.  
15 Alternatively, the above-mentioned printing instruction is also used as a signal that makes the printer be powered on.

Fig. 37 is a flow chart that shows the operation of the search condition setting process. Fig. 38 is an  
20 explanatory drawing showing the page of the search condition setting menu displayed on the monitor 2 in step S202.

The search conditions, specifically, include a frame number that is automatically attached to the image  
25 at the time of photography, the text data that the user inputs, such as the date and time of photography, the title of the image, the date of battery charge and memos.

The input data such as the title or user's name shown in figures of the present embodiment are used as  
30 a folder name, being recorded on a recording medium of the camera at the time of photography. This same folder name is also used in the memory 7f. The search condition items include the folder number in the memory 7f, the date of battery charge, the date of photography,  
35 photographer's name, title and memos in the present embodiment.

In step S221, it is determined whether or not the

002250-1223-0550

In the first operation, one of the option items in each search condition item that are preassigned is selected, or adequate words are input according to instructions instructed in the "Search Condition Setting" page. In step S223, it is determined whether or not photographer's name is selected. If it is determined that the photographer's name is selected, then the process advances to step S229 and the selected photographer's name is indicated. In Fig. 38, preassigned photographer's name includes "TARO", "HANAKO", and "ICHIRO" as the option items, who are members of a family, and "HANAKO" is selected as the photographer. The option item is described later in the process of entering and saving conditions in step S232.

In step S227, it is determined whether or not the memos are searched. The memo searching can search memos of text data that were created at the time of shooting or editing an album, with partial match retrieval, over all folders. If it is determined that the memos are searched, then the process advances to step S228 and keywords for retrieval are input therein. Inputting keywords is performed using a character code table, displayed on the monitor 2, by operating the selection button 46 and the conclusion button 47 of the remote controller 3. Inputting keywords may be also performed with a keyboard (not shown) or a pen-input device connected to the CPU of the image storage 7.

The second operation is performed in the process of reading out the title of the album in step S222. In step S222, the title of the album created in the past, stored in the memory 7f, is read out. Fig. 39 is a flow chart that shows the operation of searching the title of the album. Referring to Fig. 39, the process starts from step S222 by selecting the "Read Out" option of the "Album" item in the "Search Condition Setting" page shown in Fig. 38, using the selection button 46 of the remote controller 3. In step S240, all search conditions stored in the folder of the titles of the album in the memory 7f are read out and displayed as the listing on the screen. Fig. 40 is an explanatory drawing that shows the page of "Listing of Album Titles".

In this page of "Listing of Album Titles", the title of the album is searched in the same manner as performed in Fig. 35. In the flow of Fig. 39, in step S242 to S243, the required title of the album is input and searched. In step S246 to S247, a title of the album is selected from the displayed listing by operating the selection button 46 and the conclusion button 47 of the remote controller 3. The resulting titles of the album are displayed in step S244.

10 In step S232 in Fig. 37, the process of saving and entering the search conditions such as the title of the album or the memo is performed.

Fig. 41 is a flow chart that shows the operation of saving and entering the search conditions. This operation starts when the "Save" option item of the "Album" item in the "Search Condition Setting" page shown in Fig. 38 is selected with the selection button 46 and determined with the conclusion button 47 of the remote controller 3.

20 In step S250, it is determined whether the search condition item such as the "Title" or the "Date of Photography" is added or deleted, and likewise, it is determined whether the option item in the search condition items is added or deleted. If it is determined that the search condition item or the option item is added or deleted, then the process advances to step S251. If it is determined that the search condition item or the option item is not added or deleted, then the process advances to step S257. In step S257, the operation of entering the title of the album is performed, resulting in the title of the album stored in the memory 7f. The title of the album is created by pressing the channel button 43 using the "Character Code Table" and determined by pressing the conclusion button 47, resulting in a file stored in the folder of the title of the album in the memory 7f.

Furthermore, in step S250, if it is determined that

09576221.052200

the search condition item or the option item is deleted or added, pressing the selection button 46 of the remote controller 3 determines it. Step 251 through step 255 process deletion or addition of the search condition item or the option item. If there is not the item to delete, the process advances to step 256 where the option item of the search condition item is added.

Fig. 42 is a flow chart of operation of assigning an option item of each search condition item in accordance with embodiments of the present invention. The flowchart is performed when search condition items such as "Photographer," "The Date of Photography," "Title," and "Memo" are assigned.

The flowchart is also performed when "Image ID" or "Photographic Condition" is added as search condition. To add "Image ID" as a search condition, the number of option items is entered in step S260, and the search condition name "Image ID" is entered in step S263. In step S264, the option items of "Image ID" such as "99041501", "99040403" and "98040203" are entered. The entering operation of the character such as "Image ID", "99041501", "99040403" and "98040203" is performed by pressing the channel button 43 of the remote controller 3, using "Character Code Table", and determined by pressing the conclusion button 47.

After the process of step S264 is performed, the number of search condition items and option items is entered, and the similar operation previously described is repeated, thereby search condition items being entered.

Thus, the present invention does not need the special remote controller for image storage 7 because the remote controller 3 for a television set is widely used in homes and can activate the image storage 7. Furthermore, even a person that is clumsy at handling a machine can operate it easily because operating procedures are displayed on the monitor.

It is desirable to display a thumbnail of the image that is searched according to the search condition items that are entered by the previously mentioned operation, and to add the thumbnail as the representative image to the "Listing of Album Titles", by adding a new step, where an arbitrary thumbnail among searched images is selected and stored, to the flowchart shown in Fig. 41 between step 250 and S257, because the album desired to view can be surely selected.

When the "Print Mode" menu is selected in "Mode Selection" page 50 shown in Fig. 33, the print mode process is performed. The print mode process is a process that outputs a desired print from the image storage 7. Although one embodiment of print output process is shown in step S207 to S212 in Fig. 34, the present embodiment having higher function will be described as follows. The explanation of the system configuration is omitted because the present embodiment has the same system configuration. The symbols used in the previous embodiment are also used in the present embodiment.

(a) Memory contents of the image storage

All image data taken by the digital camera are transferred and stored in the memory 7f of the image storage 7. Folder name, folder number, file name, or file number designated while being transferred and recorded, or being succeeded by the data given while taking picture, is attached to image data stored in the memory 7f. Each image data transferred and stored in the image storage 7 includes comments, for example, the date of photography or various memos attached while taking picture.

A print instruction signal indicating that an image is to be printed is attached to all image data while taking picture. The print instruction signal can be erased by operating the digital camera. Accordingly, in image data stored in the image storage, image data

with the print instruction signal intermingle with image data without the print instruction signal.

(b) Selection of print image

A desired print is designated by attaching a print instruction signal while taking picture with a digital camera, or by adding the print instruction signal to a selected and displayed image obtained by album mode processing in the print mode. Further in the print mode, a print condition for attaching comments to a print image or designating trimming may be set up, if necessary. Attaching comments, designating trimming, and adding, deleting and changing print instruction signal are described later in detail.

Attaching comments, designating trimming and processing regarding setting up print instruction signal may be performed in the album mode.

(c) Print

Print mode will be described in detail by means of a flow chart shown in Fig. 43. The flow chart shows processing performed by the CPU 7e that is controller of the image storage 7.

When print mode starts, the image storage 7 displays print menu 54 shown in Fig. 44 on the monitor 2 superimposing on a current displaying image (S311). In Fig. 44, although it is described an example that when previous mode is the album mode, print menu is superimposed on thumbnail pictures, when previous mode is TV mode, it is superimposed on TV image.

Print menu 54 includes "successive print", "package print" and "setting up print condition". In step 312, processing flow is controlled in accordance with selected menu.

When successive print is selected, flow goes to S313, an image to be printed is selected by album mode function described before, the image is displayed on the monitor 2, and, at the same time, a menu indicating start printing is superimposed on it (S314). Here, it

002250" 12292560

When package print is selected in step S312, flow goes to step S321, and a folder including an image to be printed is selected by album mode function. The folder is selected by folder name searched and  
15 designated, or by specific image searched. When searched image is included in a plurality of files, image control information for the searched image is written temporarily in a folder automatically produced for printing. When above mentioned folder is produced,  
20 the folder is selected for print. Meanwhile, thumbnail pictures or selected images are suitably displayed by album mode function. Further, menu for starting package print is displayed in superimposing manner, flow goes to step S322 by pressing the conclusion button  
25 47, and package print starts.

When previous mode is TV mode, flow goes to step S331, and TV mode processing is performed. That is, ordinary TV processing is performed and, at the same time, printing is continued in hidden mode (S332). Then, a signal indicating progress of printing (remaining number of print) or finished printing is displayed on





1. TV mode processing is described below with the help of flow chart shown in Fig. 46.

When TV mode processing starts, the main body 1 receives ordinary TV broadcasting in step S351, and, in step S353, judges whether an interruption signal S352, which indicates progress in printing or finished printing from the CPU 7e of aforementioned the image storage 7 shown as S333 in Fig. 43, is happened or not. When the interruption signal S352 is not happened, flow goes to step S355. When the interruption signal S352 is happened, flow goes to step S354, and progress in printing or finished printing received from the CPU 7e of the image storage 7 is displayed on the monitor 2 in superimposing manner for predetermined time, and, then, flow goes to step S355. In step S355, the CPU 1h detects whether power supply to the main body 1 is turned off or not. When power supply is not turned off, flow goes back to step S351, and TV broadcasting is continued receiving.

When it is detected in step S355 that power supply to the main body 1 is turned off, flow goes to step S356, and whether package print is going on in hidden mode or not is detected. When package print is not going on, flow goes to step S360, power supply to the main body 1, the image storage 7, and the printer 9 is turned off, and, then, processing is terminated. When package print is going on, flow goes to step S357, and power supply to the TV receiver circuit of the main body 1 and the monitor 2 is turned off. Since power supply to the image storage 7 and the printer 9 is not turned off, package print is continued until finished printing is detected in step S358, and signal of progress in printing or finished printing is transmitted to the main body 1 for interruption. When finished printing signal is detected in step S358, flow goes to step S359, power supply to the image storage 7 and the printer 9 is turned off, power supply to the rest of the main body 1 is turned



scope of desired image data, for example, images in specific folder or images designated by date of photography designated in image selection function for watching are displayed (as shown in Fig. 36), print selection mark P1 (32 in Fig. 36) is displayed simultaneously with the right side of the image (31 in Fig. 36) on which print instruction signal has already been attached by the digital camera. Print selection mark is not attached to the image (33 in Fig. 36) on which print instruction signal is not attached.

As described above, since print instruction signal is automatically attached when taking picture, print instruction signal is attached to the image read in from the digital camera unless print instruction signal is deleted by operating the digital camera. Thereby operation procedure for printing in print mode is simplified.

Print selection mark P1 is displayed simultaneously with any one image selected and displayed from thumbnail pictures by image selection function. The number following the letter "P" of print selection mark denotes the number of prints to be printed. Print selection mark P1 attached by the digital camera denotes one print.

The image storage 7 can attach, change or delete print selection mark to an image displayed on thumbnail pictures by operating the remote controller 3 (in Fig. 31). Specifically, a target image is selected and displayed, and the number following the letter "P" can be increased or decreased by pushing down up button 42A or down button 42B of the volume button 42 of the remote controller 3. In Fig. 36, print selection mark P2 (35) changed by above-mentioned operation is displayed beside image 34, which denotes that the number of print is two. When the number of print is zero, print instruction signal is deleted and print selection mark is disappeared. If the up button 42A is pushed down

while print selection mark is not displayed, then print selection mark P1 appears.

(f) Trimming

Trimming can be designated to an image displayed in the album mode by using zooming function. Zooming function is activated by pushing down the channel button 43 while an image is displayed. Zooming up or down is performed by pushing down "+" button 43A or " - " button 43B of the channel button 43 respectively. The range of the zoomed image displayed on the monitor 2 becomes the range of printing. When the conclusion button 47 is pushed down while zoomed image is displayed, range of trimming and magnification is added to the image data.

When the image with this information is displayed, a mark T (36 in Fig. 36) indicating that trimming condition is recorded is displayed right side of the image. When images are displayed in due order by pushing the selection button 46, trimming image formed by trimming condition added to the image is displayed after the original image. Therefore, the same trimming image can be printed out in the future. Further, since forming the trimming image is started while displaying original image, apparent time for displaying the trimming image can be short. Since additional recording data to the memory 7f of the image storage 7 for trimming is only trimming condition, data amount for additional recording is small in comparison with recording trimming image.

(g) Output comment

In step S341 for setting up print condition, when comments A and B are set up and "request for outputting comment" is selected, comment attached to the image is printed outside the range of image as shown in Fig. 47. In this case, comment is displayed adjacent to the image in a comment display 62 arranged under an image display area 61 of the image 60 displayed in the album mode.

002250" T292550

As for the comment, there are a comment A such as date of photography attached at the time of taking picture and a comment B added by using the remote controller 3 in the album mode. These comments A and B can be  
 5 revised.

If comment A attached at the time of taking picture exists, the comment is displayed in the comment display 62 of the image 60. Then, a cursor is moved to the position for comment B, and additional comment B can  
 10 be input at the position by using the remote controller 3. Displayed comment can be revised in a overwrite manner by moving a cursor to arbitrary position of the displayed comment, and inputting revised comment.

Furthermore, since comment B added in step S341  
 15 for setting up print condition is attached to all prints printed after the setting up, it is convenient to attach same comment. On the other hand, since a comment B attached in step of input print condition (S317) of successive print is effective only in the particular  
 20 image, it is convenient to attach different comment to each image.

By the way, comment input function (S316) while setting up print condition (S317) can be activated by operating comment input described above by using the  
 25 numeral button 48 of the remote controller 3 while watching image.

[Third Embodiment]

Fig. 48 is a perspective view of Third Embodiment of the present invention and the configuration of an  
 30 image storage 4 is the same as that of First Embodiment of Fig. 1. On the other hand, the digital camera 8 is the same as that of Second Embodiment of Fig. 29.

The characteristic of Third Embodiment of Fig. 48 is represented by a complex battery charger 12. A cable  
 35 12b connecting complex battery charger 12 and the image storage 4 is of the IEEE 1394 standard and is same as the cable 5a of Fig. 1. On the other hand, a cable 12c

03576231 632300

connecting complex battery charger 12 and the digital camera 8 is a dedicated standard cable that includes a power supply cable and a signal transmission channel like the cable 8a of Fig 29. A cable 12a for common power source is the same as the cable 5a of Fig. 1. Since other configuration of the present embodiment is quite similar to that of First Embodiment of Fig. 1, the explanation is omitted.

Fig. 49 is a schematic diagram of the system design for Third Embodiment. In the complex battery charger 12, the cable 12c that includes a recharge cable 12d and a signal transmission channel 12e in conformity with the IEEE 1394 combined in one is connected with a connecting terminal 8c. To cope with this, the complex battery charger 12 has a connecting terminal 12f in which a signal connector in conformity with the IEEE 1394 and a power supply connector are combined in one. The power supply connector of the connecting terminal 12f is connected with an AC adapter 12g and at the same time, the signal connector is connected with an IEEE 1394 terminal 12h. With the IEEE 1394 terminal 12h, the cable 12b of the IEEE 1394 standard is connected. A common power source is supplied to the AC adapter 12g by way of the cable 12a.

In Third Embodiment, complex battery charger 12 is the exclusive accessory for the digital camera 8 and the AC adapter 12g supplies the specific voltage with the digital camera 8. With a different digital camera 8, a different complex battery charger 12 with different voltage is to be supplied to cope with this. Thus, the image storage 4 can be for general-purpose use. The complex battery charger 12 does not need particularly big cost increase since it is formed by only adding to an ordinary battery charger IEEE 1394 terminal to connect with the image storage 4, and, preparing the connecting terminal combining the power supply connector and the signal connector to connect the

digital camera 8, and, only wiring them.

[Fourth Embodiment]

Fig. 50 is a perspective view of Fourth Embodiment of the present invention. In this embodiment, each function of First Embodiment of Fig. 1 is integrated in one television set. To illustrate the detail of that in relation with Fig. 1, the main body 1 and the monitor 2 are separate in First Embodiment, but in Fourth Embodiment of Fig. 50, they are configured as an ordinary television set. The main body 1 including a tuner is housed in a case 13 together with a monitor 14. Other functions corresponding to the image storage 4 in First Embodiment are also incorporated in the case 13.

Since in Fourth Embodiment, the main body 1 and functions corresponding to the image storage 4 in First Embodiment are integrated in one as an ordinary television set, it is possible to memorize a program to control the main body 1 as well as image data in a large capacity memory 4f consisting of a hard disc for the image storage 4.

A storage space 15 is for a digital camera 18, and when a door 16 is closed, the digital camera stored is shut tight and is made dust-proof. The storage space 15 is located at the place least affected by the heat and the electromagnetic wave emitted from television set and walls of the storage space may be made heat-resistant and anti-electromagnetic-wave structure as occasion demands.

A docking station 17 in Fig. 50 corresponds to the docking station 5 in Fig. 1 and is exclusively for the digital camera 18 and is interchangeable in accordance with the type of the digital camera. The docking station 17 has standardized a power supply connector and a signal connector, and when it is fixed to the bottom of the storage space 15, these connectors are connected with corresponding connectors of the main body 1. The





5 In Fourth Embodiment, a card slot corresponding to the card slot 4s of First Embodiment is prepared in the position not seen in Fig. 50, digital still image can also be input from a card memory inserted in this card slot, apart from by storing the digital camera 18.

10 [Fifth Embodiment]

Another Fifth Embodiment of the present invention will be described below.

Although an image storage and a printer are separate in First Embodiment to Fourth Embodiment, they are combined in one in Fifth Embodiment. Other configurations are the same as those in other Embodiments.

As shown in Fig. 51(a), the printer 9 is formed as a separate unit from the image storage 7 and is mounted on the image storage 7. In the top cover of the image storage 7, alignment means as a hollow 7A is provided for engaging with projected parts 9A arranged in the bottom plate of the printer 9 in order to mount the printer steadily. Signal transmission means 7B and 9B such as a connector terminal and a photo coupler are provided in the top cover of the image storage 7 and bottom plate of the printer 9 to transmit image data and controlling signals between the storage 7 and the printer 9. Therefore, as shown in Fig. 51(b), print output can be ready if the printer 9 is just mounted on at the fixed position of the image storage 7.

Installation space can be saved since the image storage 7 and the printer 9 are integrated in one (vertically). As they can also be separated, when either of them is out of order, that part only can be repaired or exchanged.

According to the present invention, still images



response to the detection of the connection by the detector.

6. The image storage according to claim 1, wherein the controller automatically transmits a signal to the digital camera to turn on the same in response to the detection of the connection by the detector.

7. The image storage according to claim 1, wherein the function of the controller to have the image storage receive the image data is designed to be carried out in accordance with a program, which is started in response to the detection of the connection by the detector.

8. The image storage according to claim 1, wherein the controller includes a program to automatically delete an incomplete image data which may be caused by an interruption of the data transmission from the digital camera.

9. The image storage according to claim 1, wherein the image data is managed in accordance with a directory structure in the digital camera, and wherein the controller has the image storage take over at least a part of the directory structure in the built-in memory when storing the image data transmitted from the digital camera.

10. The image storage according to claim 1, wherein the digital camera is of a type with a rechargeable power source, and the image storage further comprising a second controller to automatically allow the rechargeable power source to be charged in response to a termination of the image data transmission from the digital camera to the image storage.

11. The image storage according to claim 1, wherein the controller automatically transmits a signal to the digital camera to turn off the same in response to a termination of the image data transmission from the digital camera to the image storage.

12. The image storage according to claim 1,

002250" T2294560



from the memory; and

a controller to have the digital circuit read out the image data from the memory to transmit the same to the image storage through the connector in response to the image storage detecting the connection of the connector.

18. The digital camera according to claim 17, wherein the controller is designed to selectively transmit the image data which is retrievable by the image storage.

19. The digital camera according to claim 17, wherein the image data is managed in accordance with a directory structure in the digital camera, and wherein the controller is designed to transmit the image data so as to make it possible for the image storage to take over at least a part of the directory structure in the storage memory when storing the image data transmitted from the digital camera.

20. The digital camera according to claim 17, further comprising a rechargeable power source, and a second controller for automatically allowing the rechargeable power source to be charged in response to a termination of the image data transmission to the image storage.

21. The digital camera according to claim 17, wherein the controller is designed to delete the image data which has already been transmitted to the image storage.

22. The digital camera according to claim 21, wherein the controller is designed to forcibly delete the image data even if the image data is protected against a deletion according to a digital camera setting.

23. The digital camera according to claim 21, wherein the controller is designed not to delete the image data if the image data is protected against a deletion according to a digital camera setting.

24. The digital camera according to claim 21, further comprising a user interface for confirming a user in advance whether or not the image data may be forcibly deleted from the memory even if the image data is protected against a deletion according to a digital camera setting.

25. A digital camera connectable to an image storage which has a storage memory for storing a plurality of image and a digital circuit for retrieving desired one of the plurality of image data from the built-in memory, comprising:

a first connector for electric connection with the image storage for data transmission therewith;

a memory for storing image data taken by the digital camera;

a digital circuit for reading out the image data from the memory;

a first controller to have the digital circuit read out the image data from the memory to transmit the same to the image storage through the connector;

a rechargeable power source of the digital camera;

a second connector for receiving power to charge the power source; and

a second controller to have the digital camera automatically initiate the charging of the power source with the power through the second connector in response to a termination of the image data transmission to the image storage through the first connector.

26. The digital camera according to claim 25, wherein the first and second connectors are arranged to be simultaneously connectable with the image storage in one action.

27. The digital camera according to claim 26, further comprising a detector capable of detecting the connection of the image storage to the connectors, wherein the first controller is arranged to have the digital circuit read out the image data from the memory

002250 12294550





digital camera;

a digital circuit for reading out the image data from the memory;

a power switch; and

5 a controller for automatically turning on the power switch in response to the image storage detecting the connection of the connector.

30. A digital camera connectable to an image storage which has a storage memory for storing a plurality of image and a digital circuit for retrieving desired one of the plurality of image data from the built-in memory, comprising:

a connector for electric connection with the image storage for data transmission therewith;

15 a memory for storing image data taken by the digital camera;

a digital circuit for reading out the image data from the memory;

a power switch; and

20 a controller for automatically turning off the power switch in response to the image storage.

31. A digital camera connectable to an image storage which has a storage memory for storing a plurality of image and a digital circuit for retrieving desired one of the plurality of image data from the built-in memory, comprising:

a connector for electric connection with the image storage for data transmission therewith;

30 a memory for storing image data taken by the digital camera;

a first digital circuit for reading out the image data from the memory;

a power switch;

35 a first controller to have the first digital circuit read out all the possible image data in the memory to transmitting the same to the image storage through the connector;

00225012232550



connector;

a first indicator for informing of the charging through the first connector; and

a second indicator for informing of the data  
5 transmission through the second connector.

35. An image storage connectable to a digital camera comprising:

a connector for electric connection with the digital camera for data transmission therefrom;

10 a memory for storing a plurality of image data transmitted from the digital camera through the connector; and

a controller for transmitting a deletion signal to the digital camera in response to a completion of  
15 the transmission of the image data from the digital camera to the image storage, the deletion signal being individually transmitted for each of the image data, whereby the digital camera individually deletes the image data each time the digital camera receives the  
20 deletion signal.

36. An image storage connectable to a digital camera comprising:

a connector for electric connection with the digital camera for data transmission therefrom;

25 a memory for storing a plurality of image data transmitted from the digital camera through the connector; and

a controller for transmitting a deletion signal to the digital camera in response to a completion of  
30 the transmission of the image data from the digital camera to the image storage, wherein an image data protected against a deletion according to a digital camera setting is not deleted by the signal.

37. A digital camera connectable to an external  
35 device, comprising:

a rechargeable battery;

a digital circuit to which electric power is

002250 052200















transmission therefrom.

63. The television set according to claim 61, wherein the input includes a slot for a card storing the digital still image data.

5        64. The television set according to claim 61, further comprising a temporary memory for storing the digital still image read out from the built-in memory, wherein the monitor displays the still image on the basis of the temporary memory in the second mode.

10       65. The television set according to claim 64, wherein the temporary memory keeps the same digital still image data with the main switch on unless the digital still image data is replaced by another one, and loses the digital still image data with the main  
15       switch turned off.

20       66. The television set according to claim 64, wherein the monitor is controlled to instantly display the still image when the mode switch is changed into the second mode with any digital still image data stored in the temporary memory

25       67. The television set according to claim 66, wherein the monitor is controlled to display a predetermined still image when the mode switch is changed into the second mode with no digital still image data stored in the temporary memory, the display of the predetermined still image being continued until the built-in memory actually becomes active after its activation.

30       68. The television set according to claim 67, wherein the predetermined still image is provided by a read only memory.

35       69. The television set according to claim 67, wherein the predetermined still image is the broadcast program from the television circuit, the broadcast program being replaced by the still image when the built-in memory actually becomes active.

70. The television set according to claim 67,

00250" 222550

wherein the television set is turned on in the first mode in response to the main switch even if the main switch has been turned off in the second mode.

71. The television set according to claim 61,  
5 wherein the memory controller is designed to keep the built-in memory active for a predetermined time period after the mode switch is changed from the second to first mode with the still image on the monitor instantly replaced by the broadcast program.

10 72. A television set capable of storing digital still image comprising:

a television circuit including a tuner for receiving a broadcast program;

15 a built-in memory of a large capacity for storing a plurality of digital still image data;

a monitor for selectively displaying one of the broadcast program from the television circuit and the still image from the built-in memory;

20 an input for the digital still image data for the storage in the built-in memory;

a main switch;

25 a mode switch for selecting between a first mode to have the monitor display the broadcast program from the television circuit and a second mode to have the monitor display the still image from the built-in memory;

a memory controller for switching the built-in memory between a rested condition and an active condition; and

30 a temporary memory for storing the digital still image read out from the built-in memory, the monitor displaying the still image on the basis of the temporary memory in the second mode,

35 wherein the monitor is controlled to instantly display the still image when the mode switch is changed from the first to second mode with any digital still image data stored in the temporary memory, regardless

09575331 052200

of the condition of the built-in memory.

73. A television set capable of storing digital still image comprising:

5 a television circuit including a tuner for receiving a broadcast program;

a built-in memory of a large capacity for storing a plurality of digital still image data;

10 a monitor for selectively displaying one of the broadcast program from the television circuit and the still image from the built-in memory;

an input for the digital still image data for the storage in the built-in memory;

a main switch;

15 a mode switch for selecting between a first mode to have the monitor display the broadcast program from the television circuit and a second mode to have the monitor display the still image from the built-in memory; and

20 a memory controller for switching the built-in memory between a rested condition and an active condition;

25 wherein the memory controller is designed to keep the built-in memory active for a predetermined time period after the mode switch is changed from the second to first mode with the still image on the monitor instantly replaced by the broadcast program.

74. A television set capable of storing image comprising:

30 a television circuit including a tuner for receiving a broadcast program;

a built-in memory of a large capacity for storing image;

35 a monitor for selectively displaying one of the broadcast program from the television circuit and the image from the built-in memory;

a main switch;

a mode switch for selecting between a first mode

00339 "F33460

to have the monitor display the broadcast program from the television circuit and a second mode to have the monitor display the image from the built-in memory; and

5 a memory controller for leaving the built-in memory in a rested condition when the main switch is turned on to activate the television circuit in the first mode, and for activating the built-in memory when the mode switch is changed into the second mode.

10 75. A television set capable of storing digital still image comprising:

a television circuit including a tuner for receiving a broadcast program;

a memory for storing a plurality of digital still image;

15 a monitor for selectively displaying one of the broadcast program from the television circuit and the still image from the memory;

an input for receiving the digital still image; and

20 a controller to have the television set receive the digital still image through the input to store the same in the memory.

002259 T229/650

ABSTRACT OF THE DISCLOSURE

An image storage has a built-in memory of a large capacity for storing a plurality of image data taken by a digital camera. The image storage receives the  
5 image data transmitted from the digital camera through a connector to store the same in the built-in memory in response to the detection of the connection by the detector. In the case of a rechargeable digital camera, only by docking the digital camera to the image storage,  
10 both a charging connector as well as the data transmission connector are made in contact between the digital camera and the image storage. The digital camera automatically initiates the charging in response to a termination of the image data transmission to the image  
15 storage. The digital camera automatically turns on itself in response to the image storage detecting the connection of the digital camera to the image storage. The digital camera deletes all the possible digital image data therein after the completion of the  
20 transmission of the digital image data to the image storage. The image storage with the built-in memory of a large capacity may be advantageously practiced as a television set.

2025 RELEASE UNDER E.O. 14176

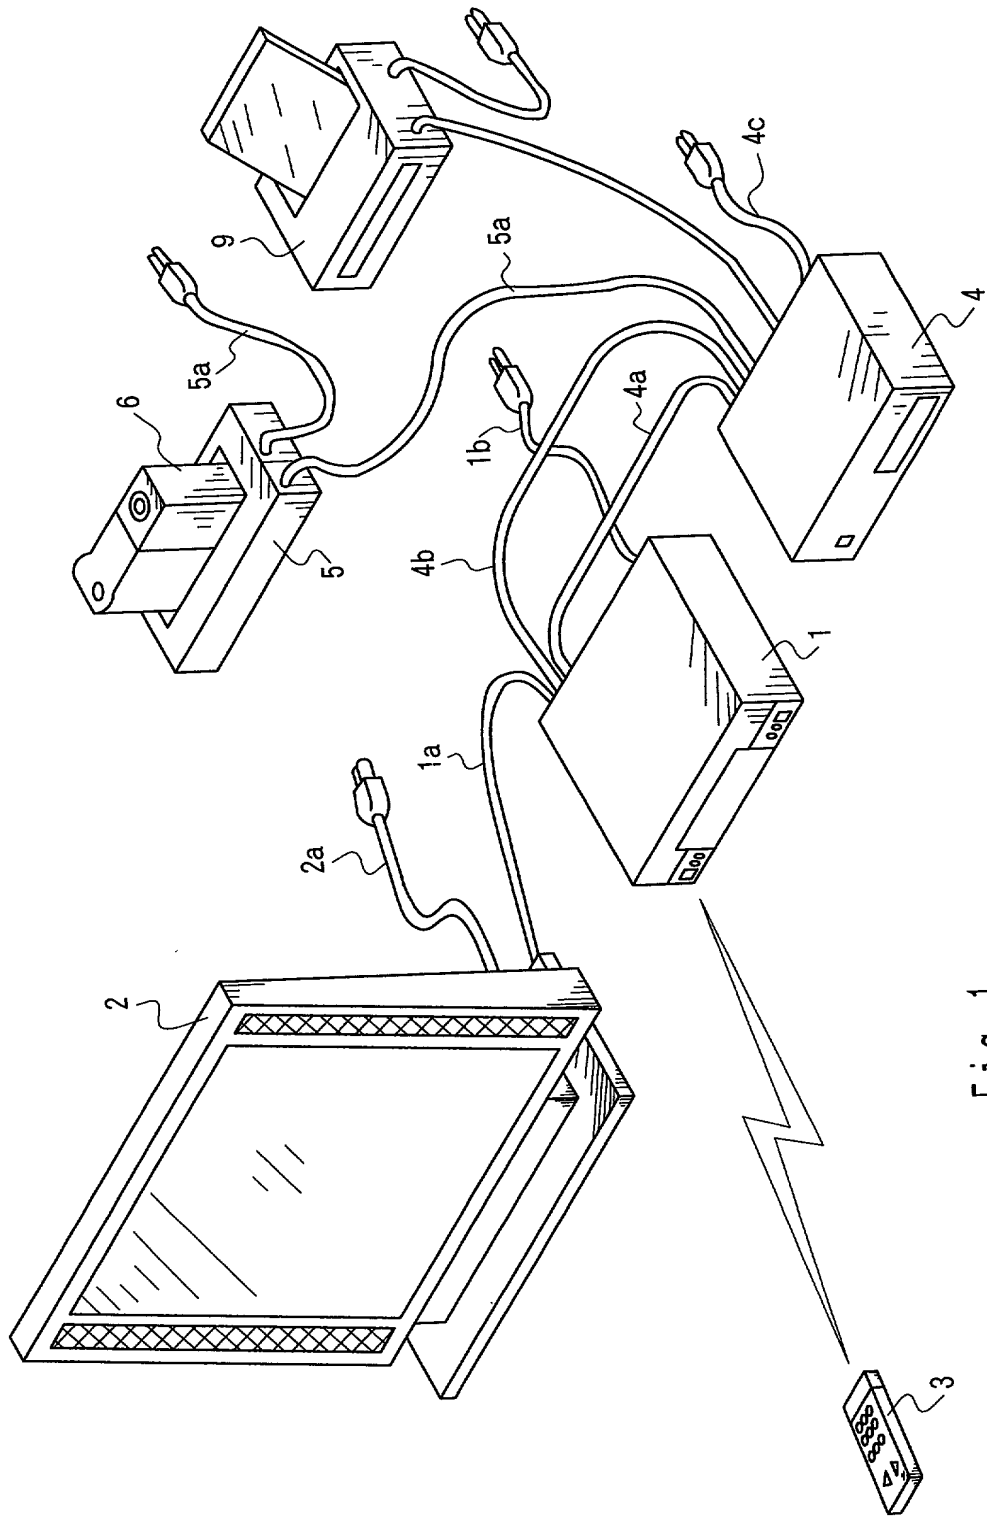


Fig. 1

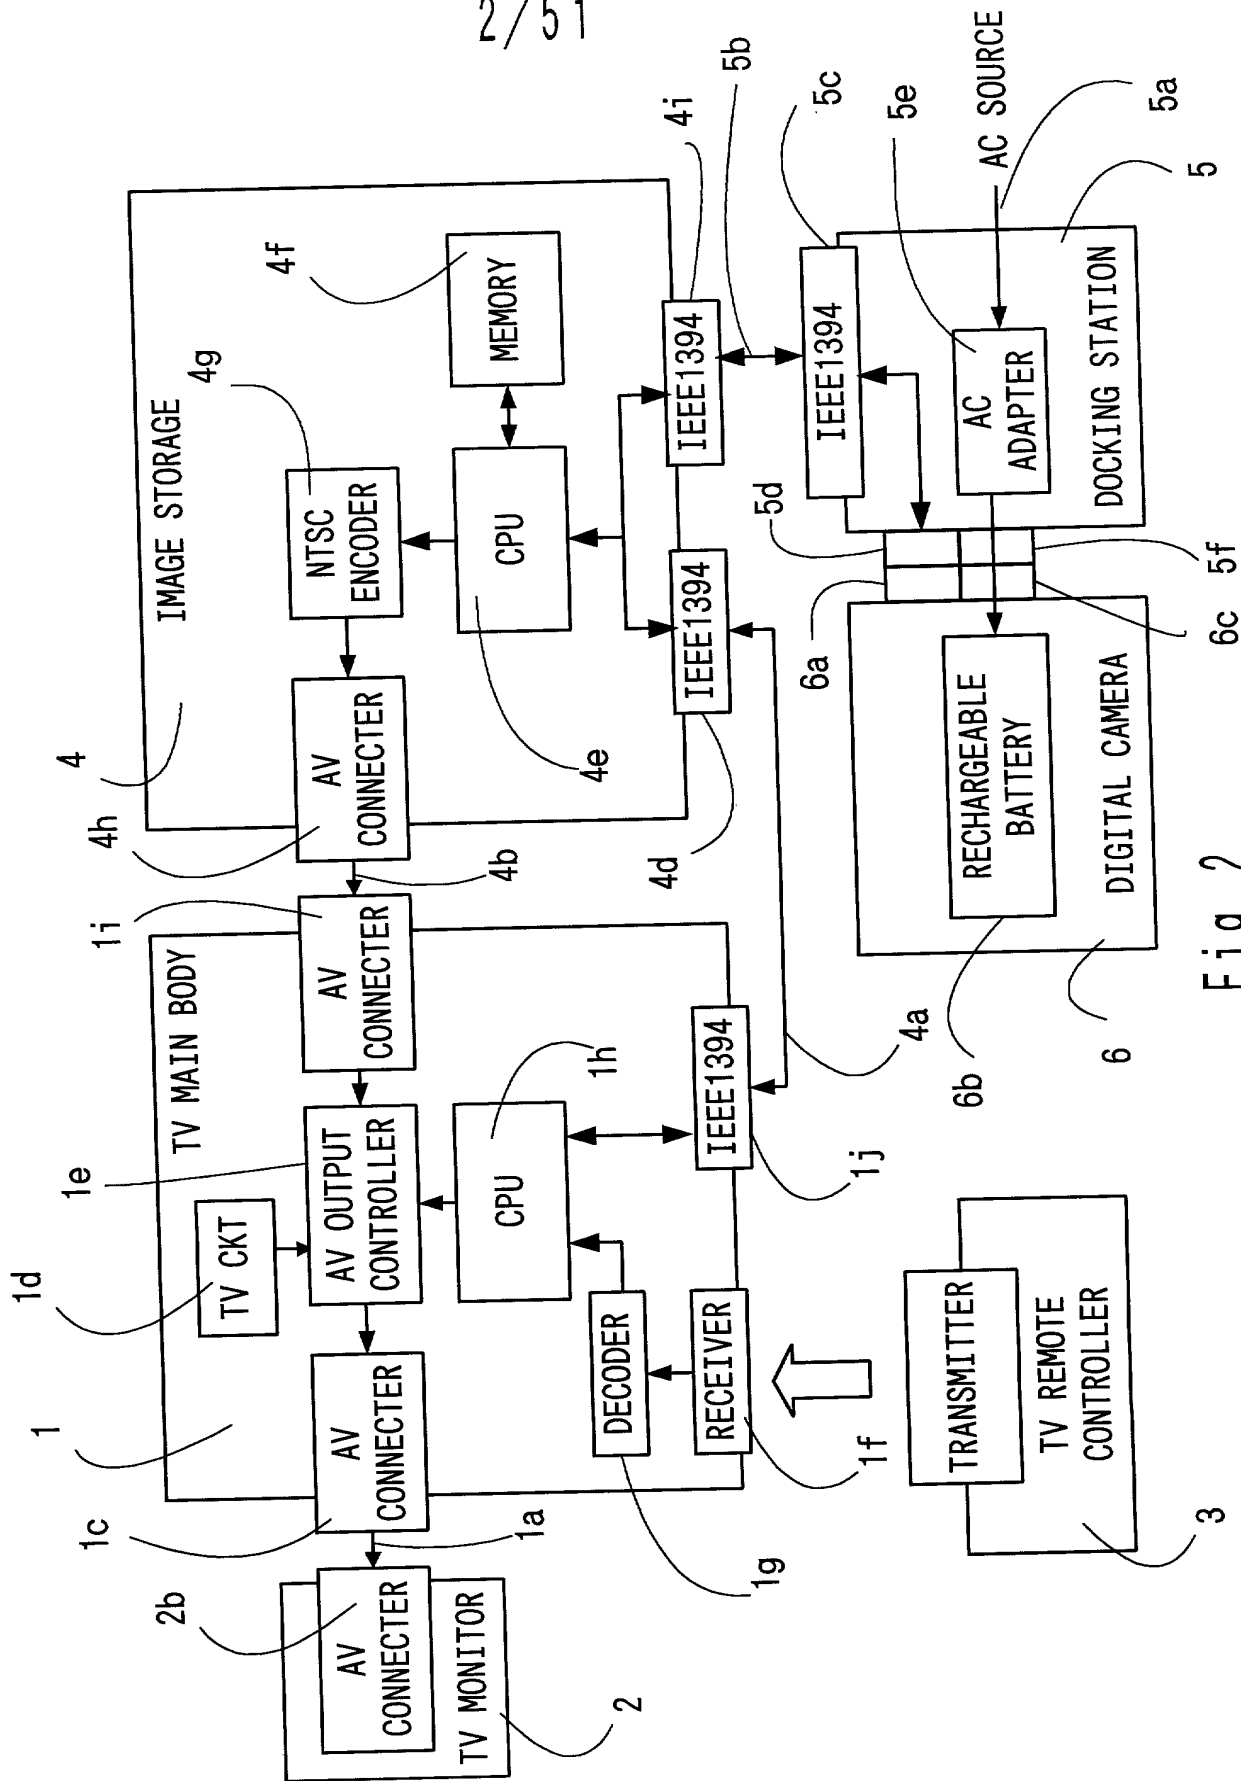


Fig. 2






Fig. 3

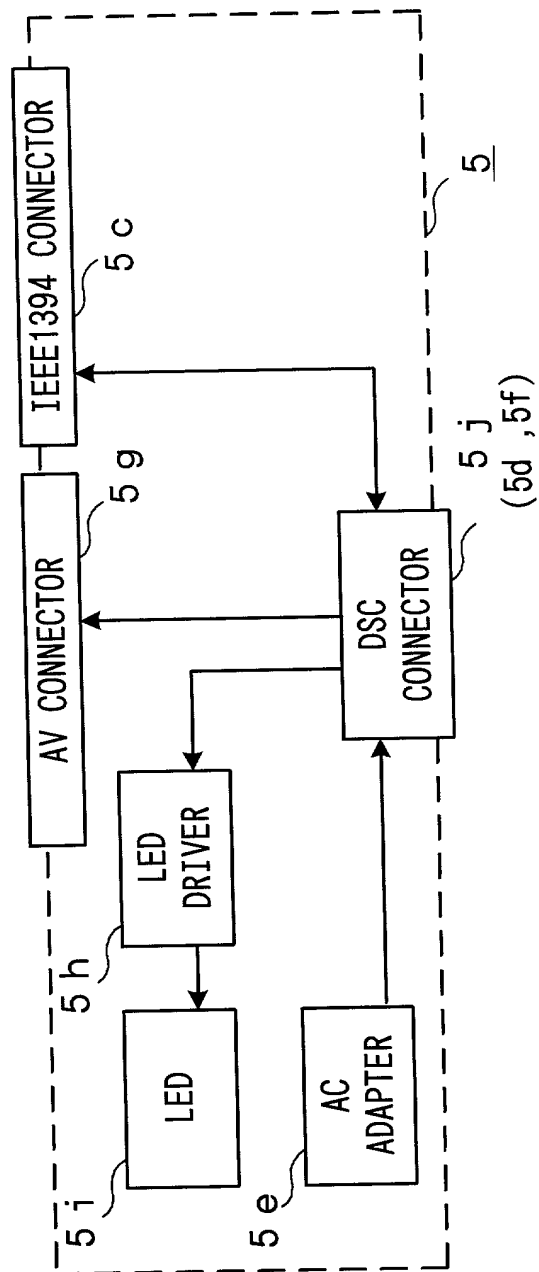


Fig. 4

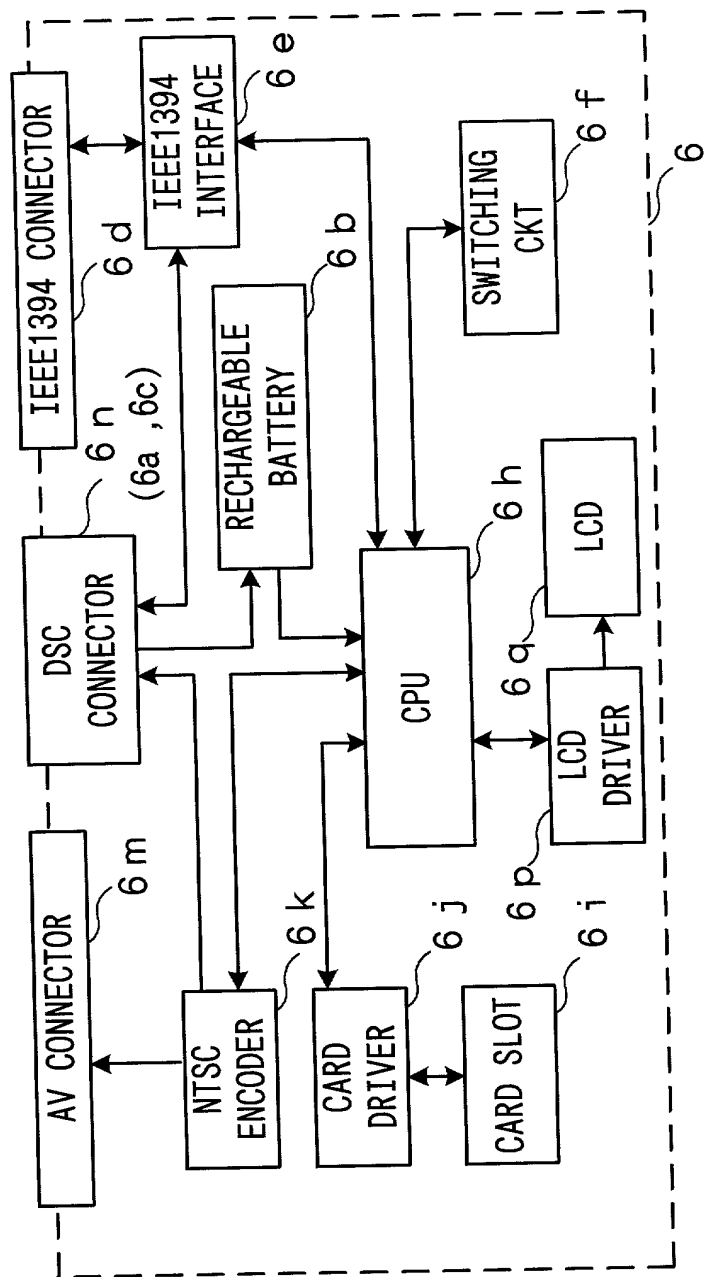


Fig. 5

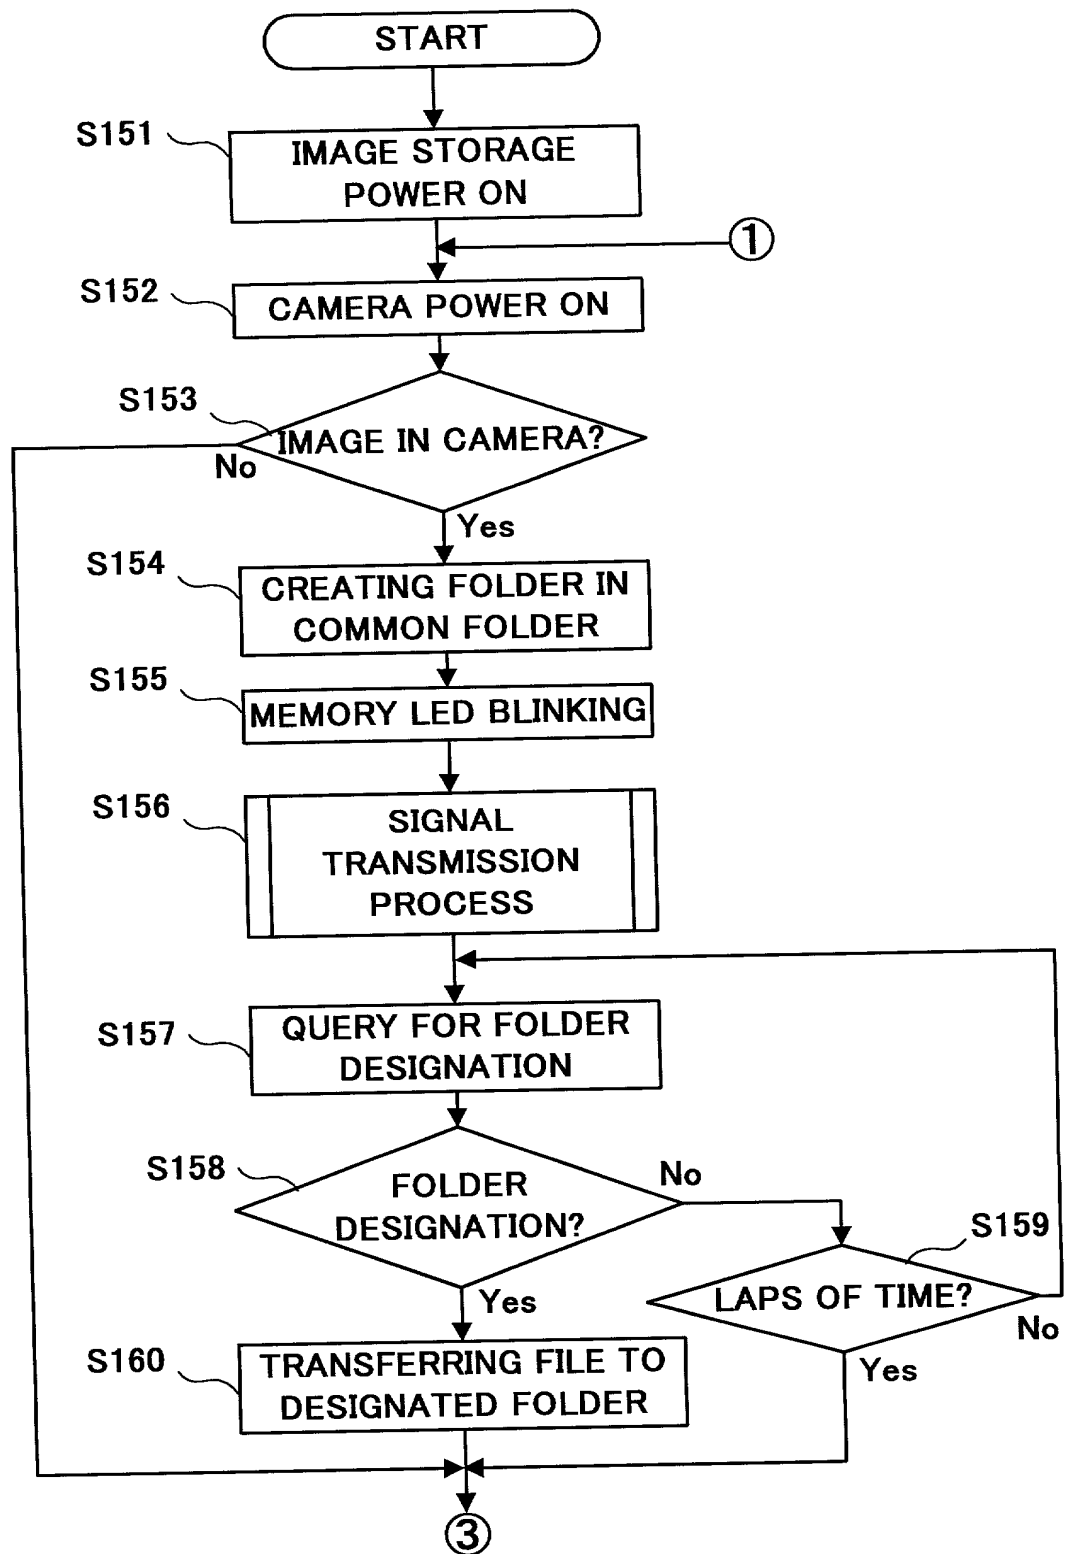


Fig. 6

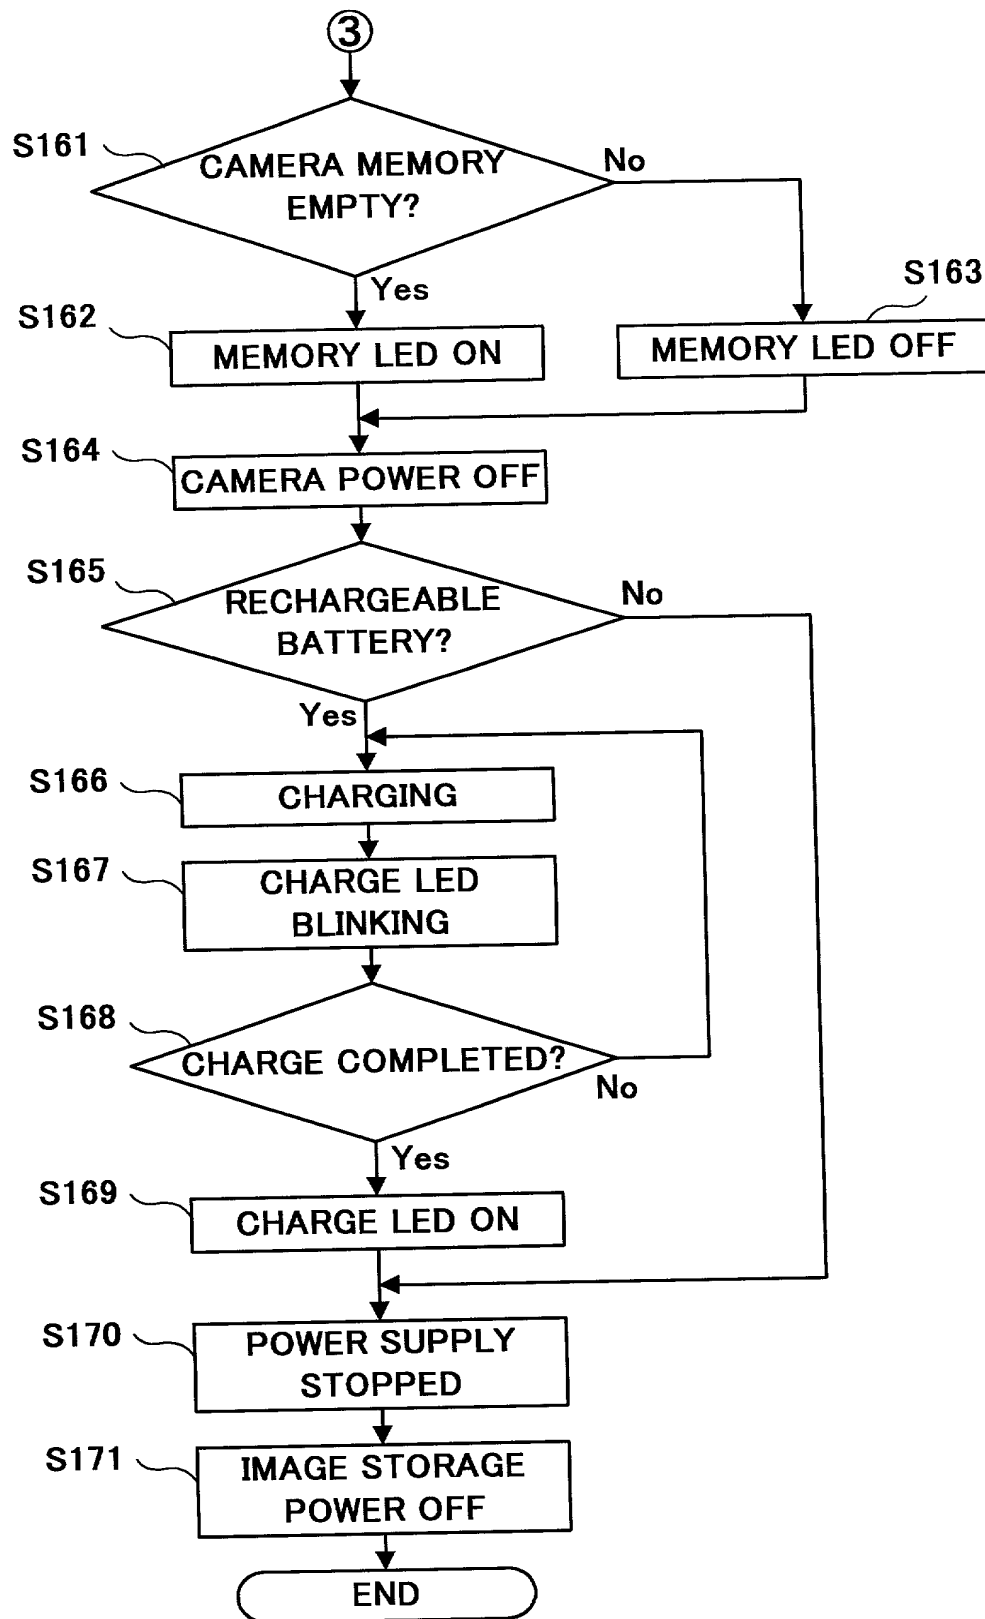


Fig. 7

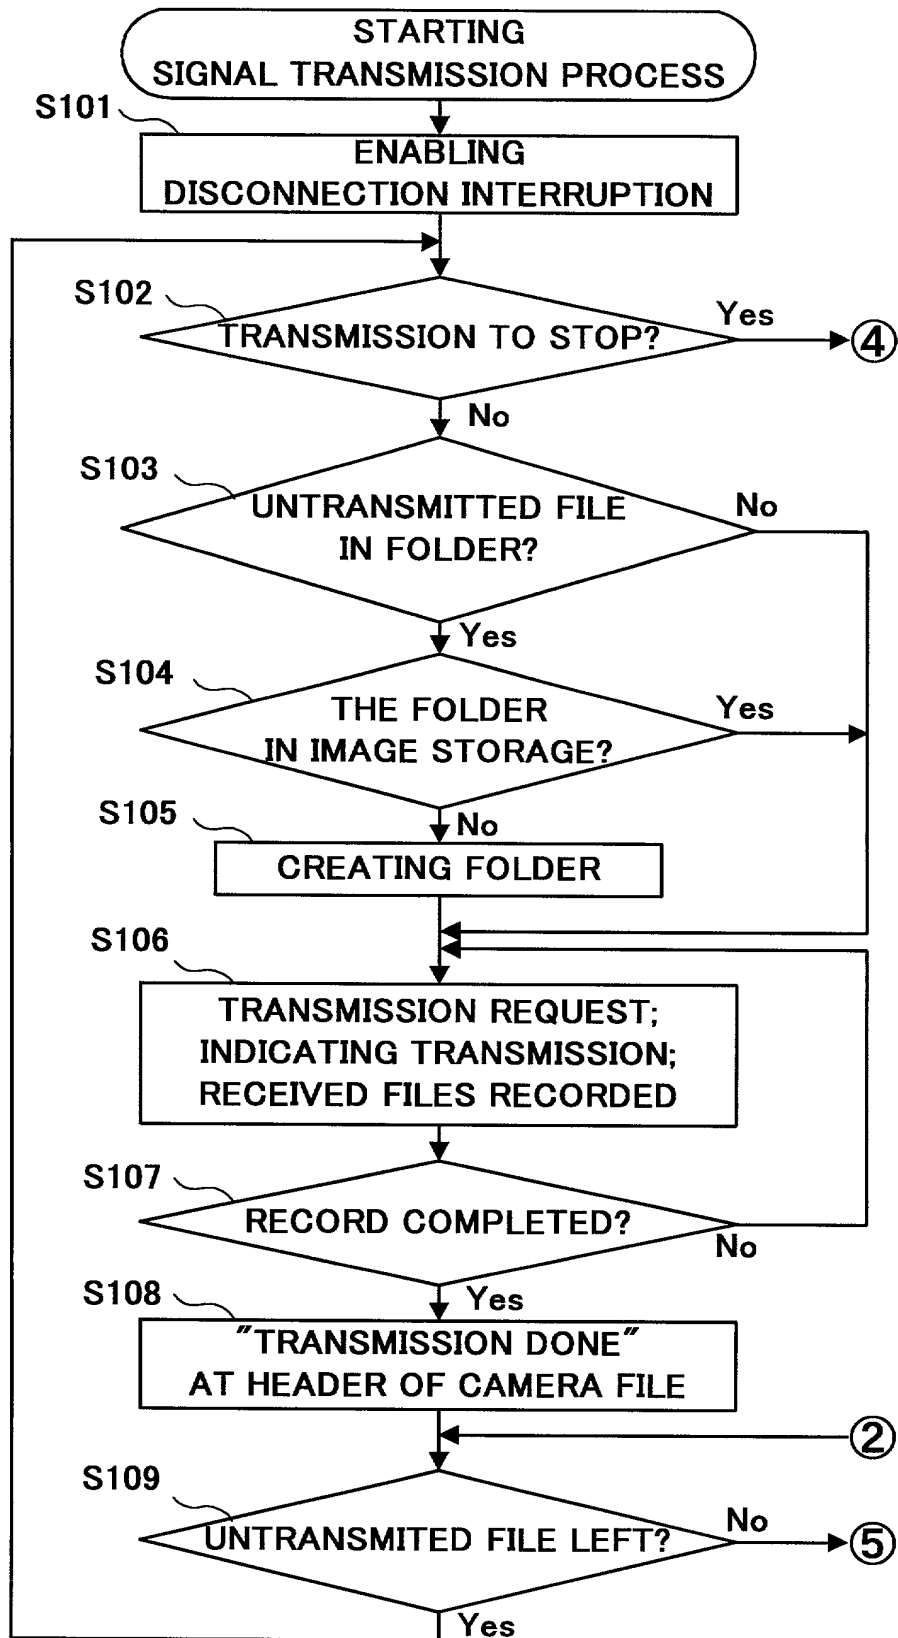


Fig. 8



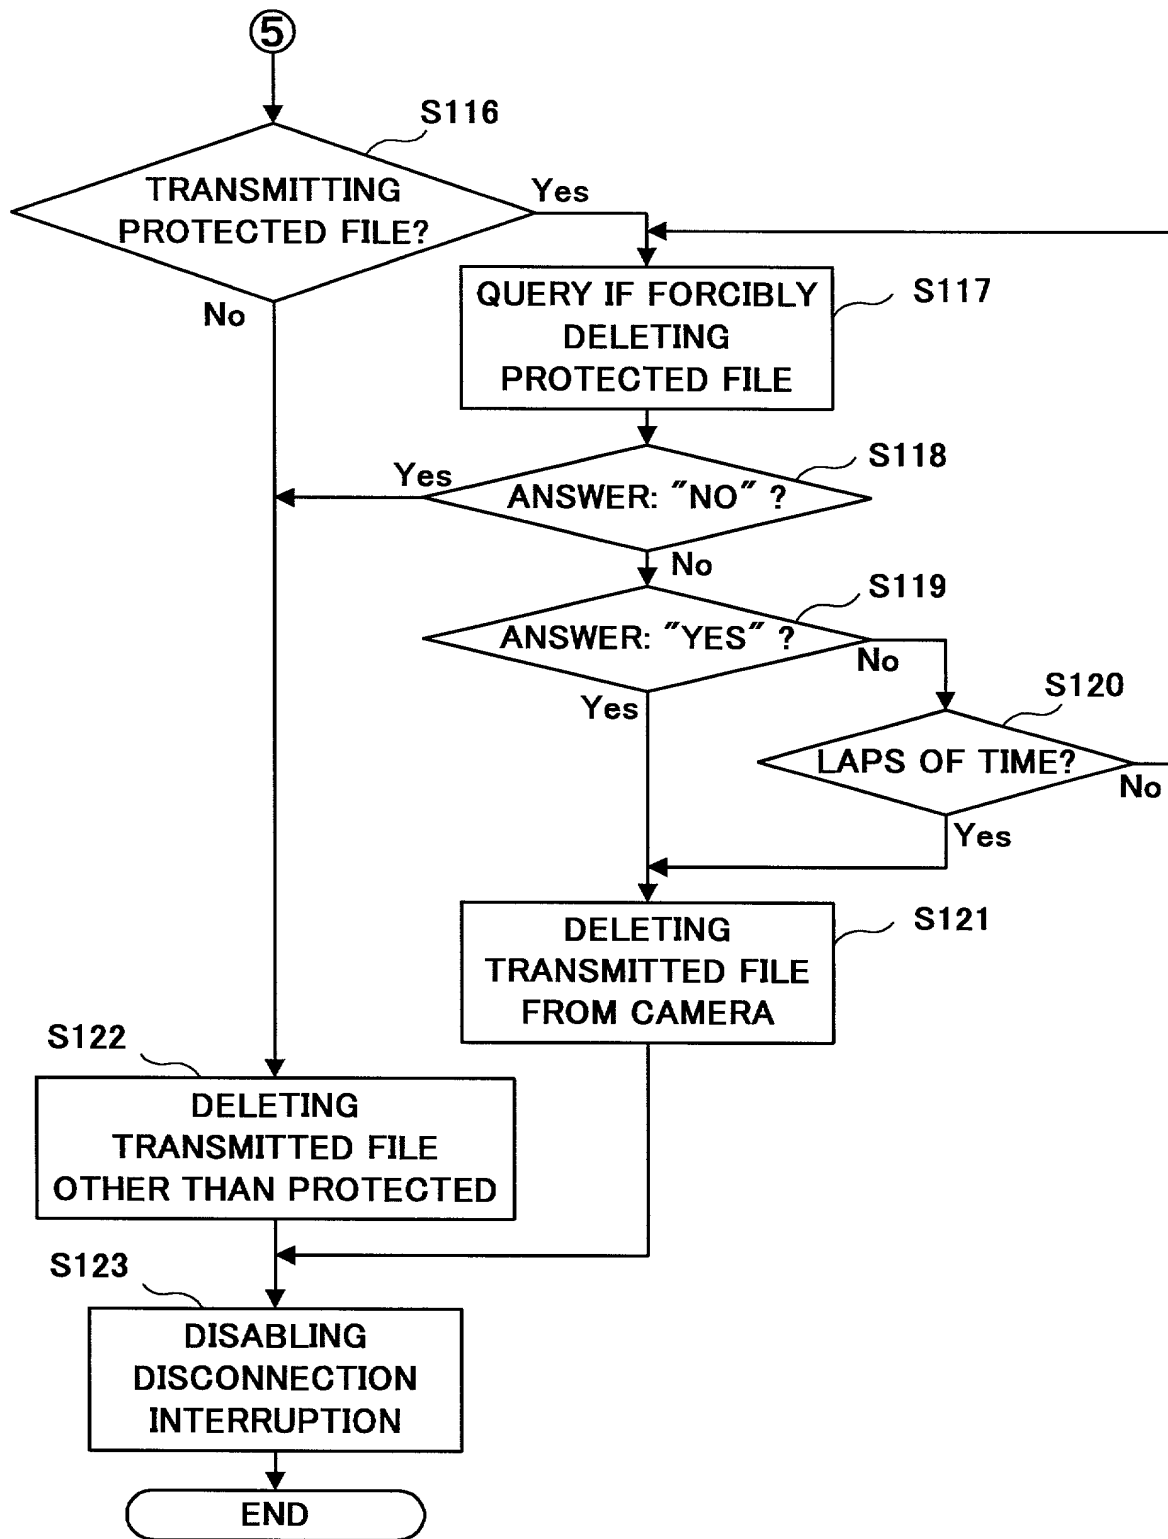


Fig. 10



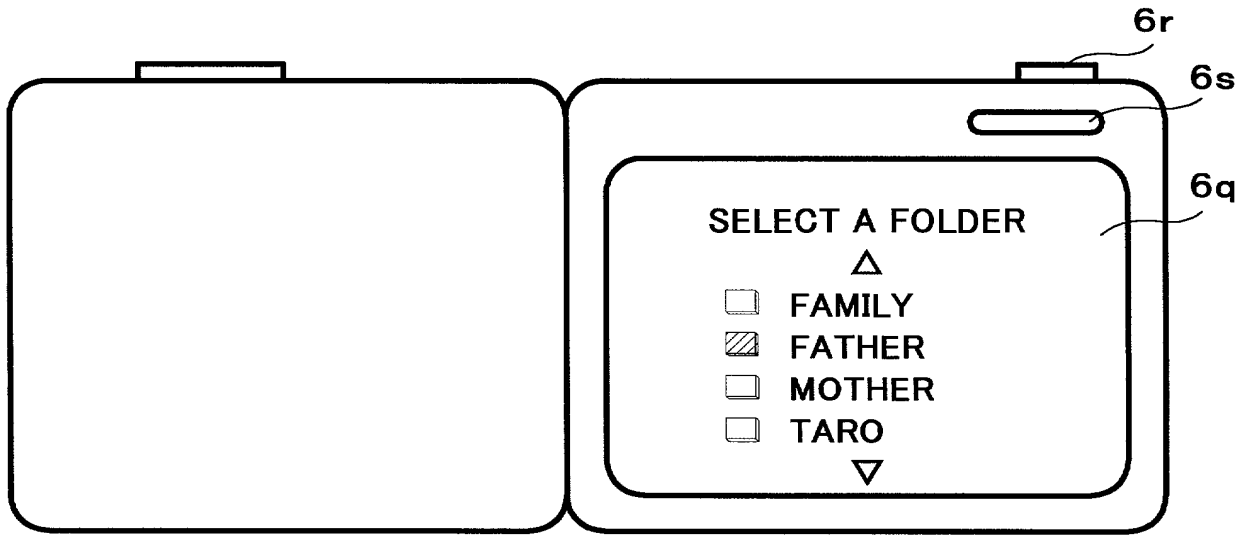


Fig.11A

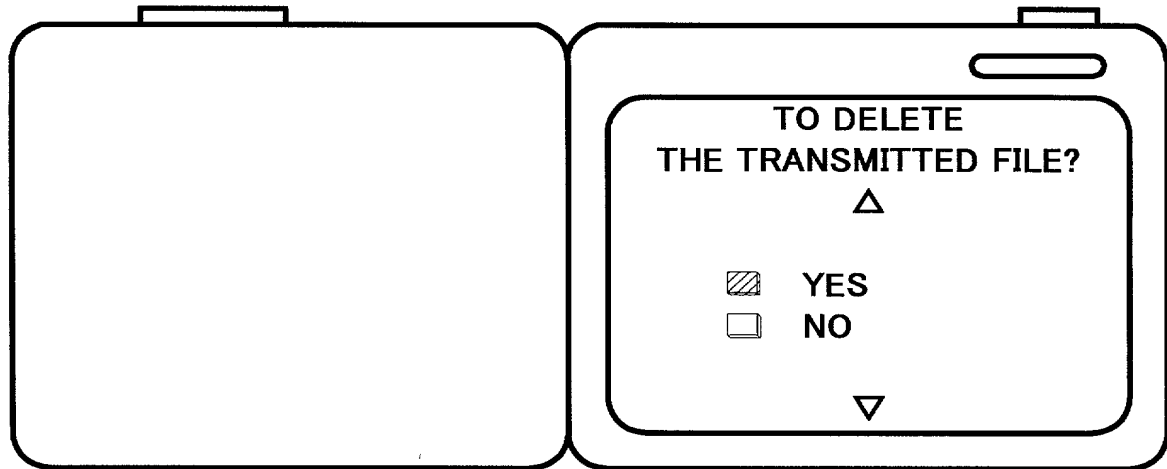


Fig.11B

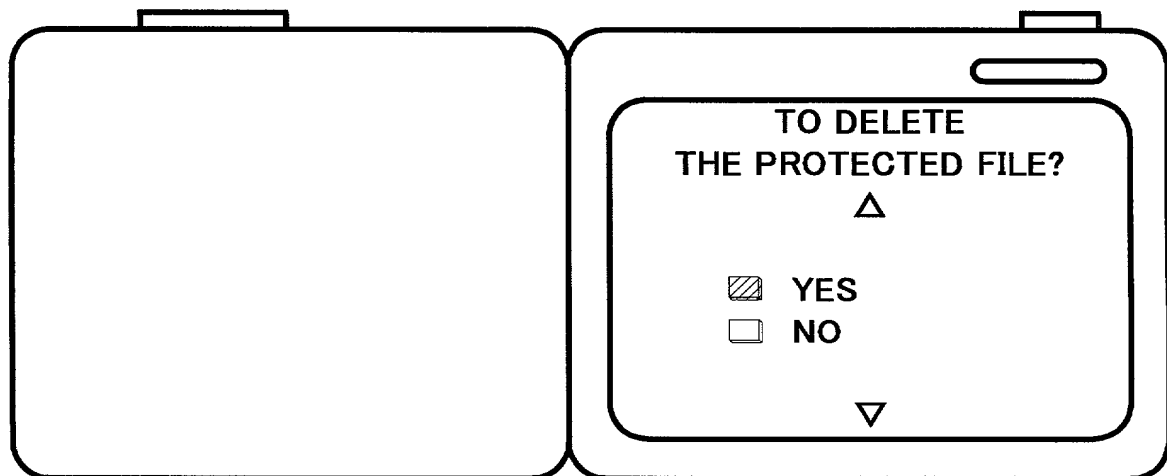


Fig.11C

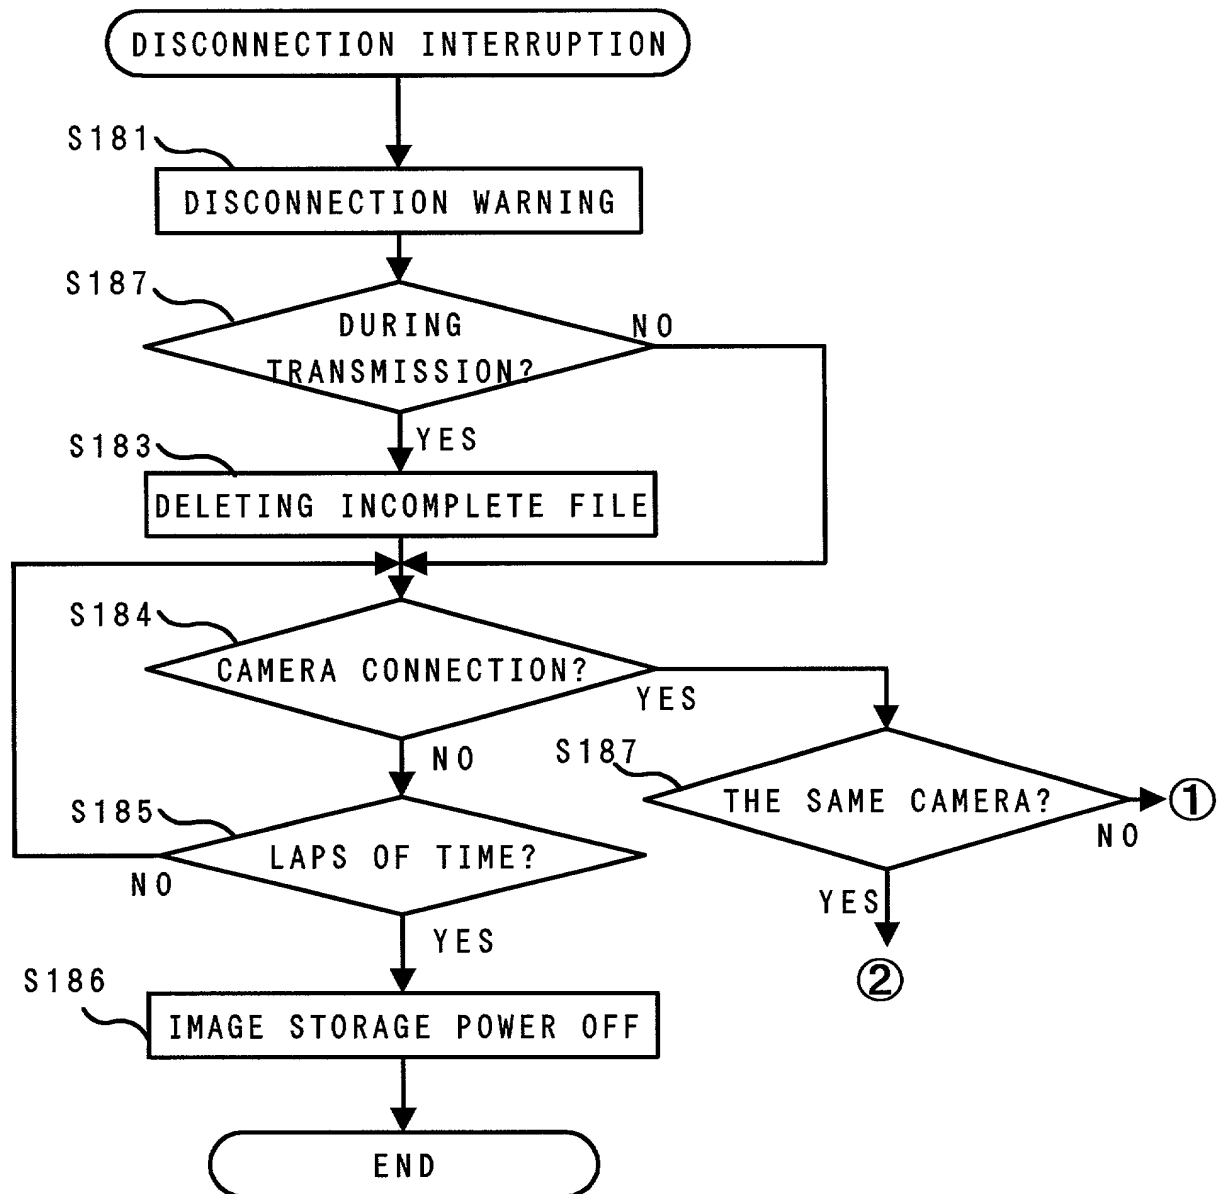


Fig.12

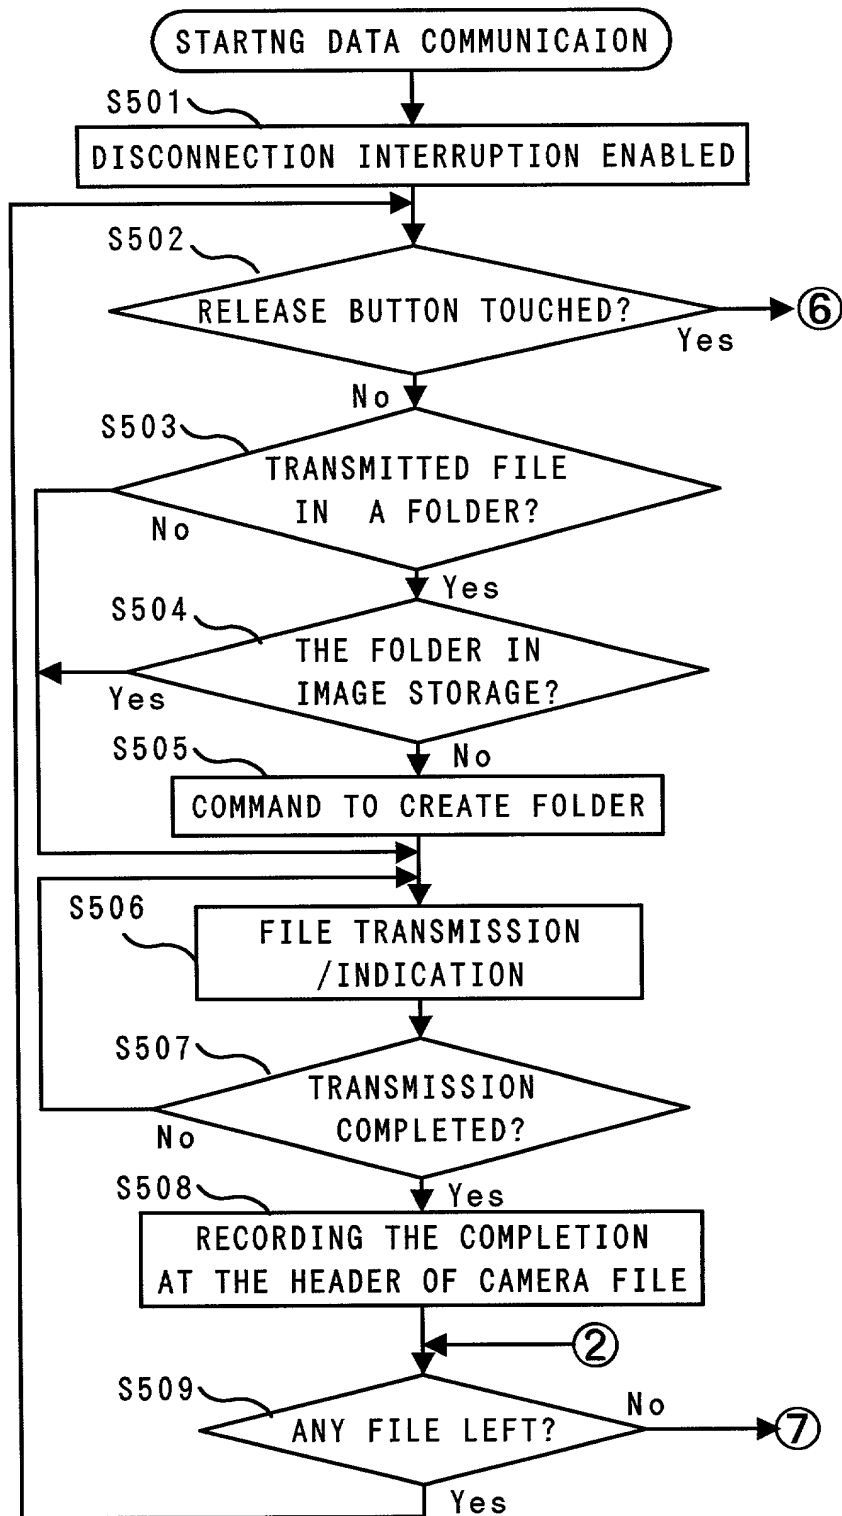


Fig.13

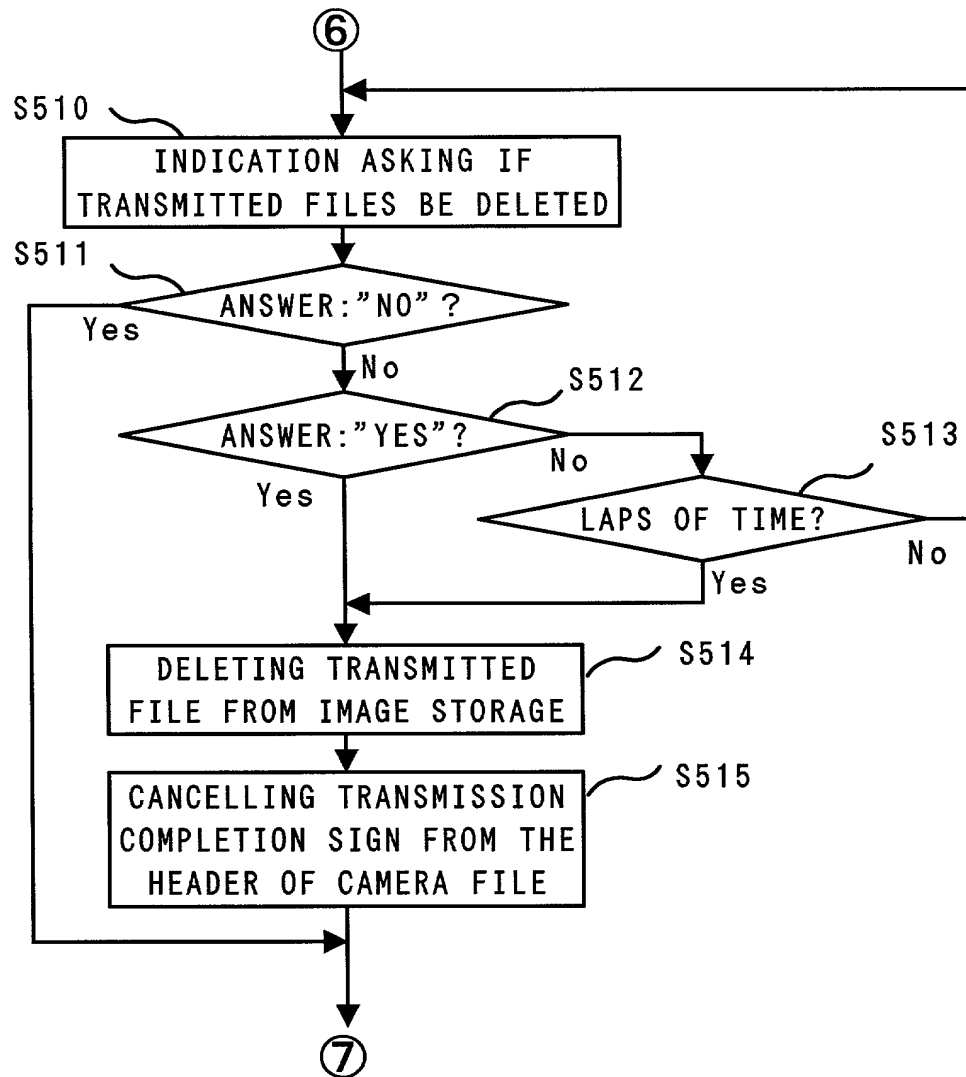


Fig.14

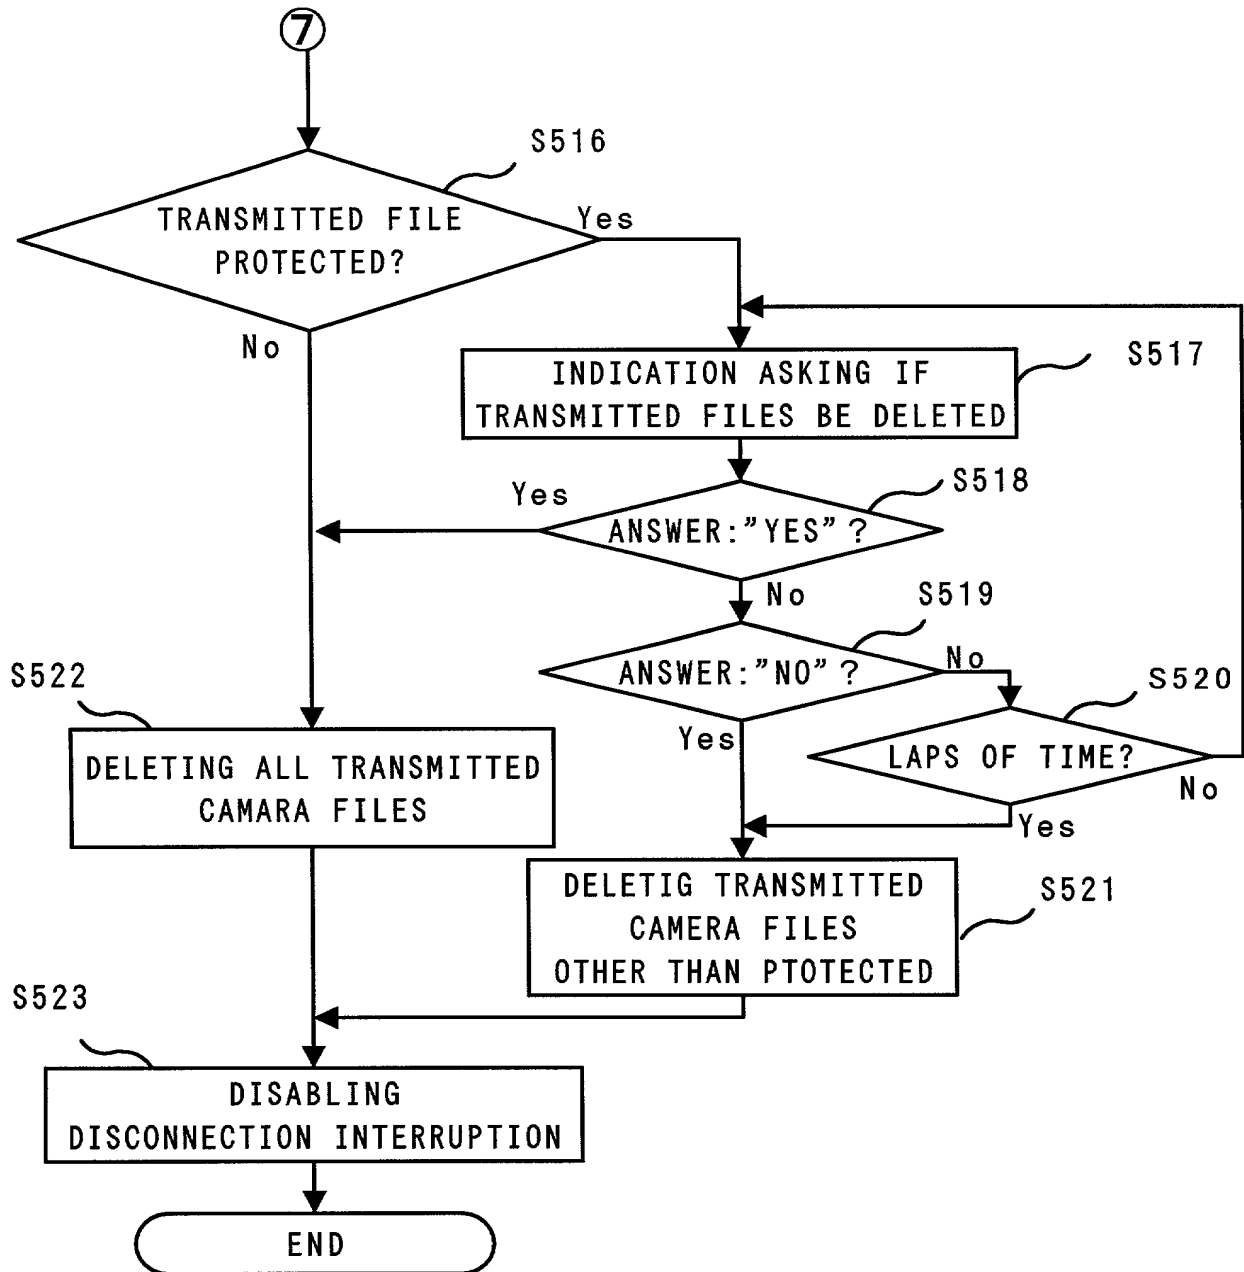


Fig.15

16/51

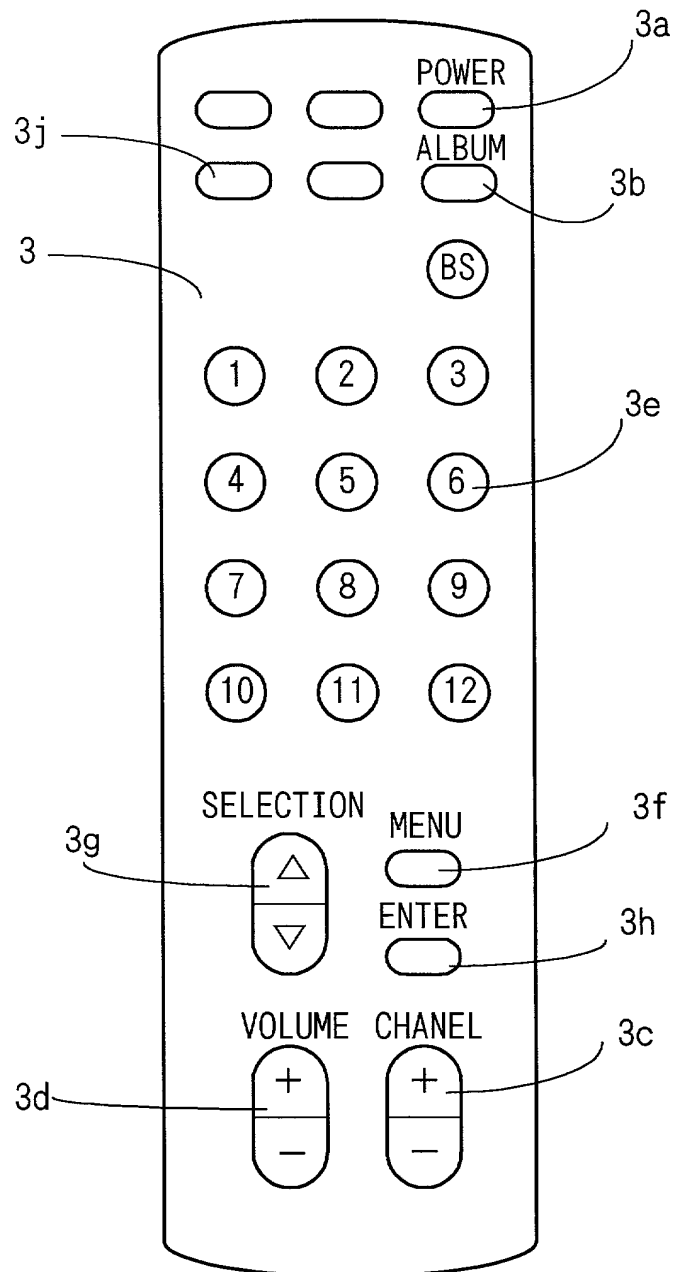


Fig.16

17/51

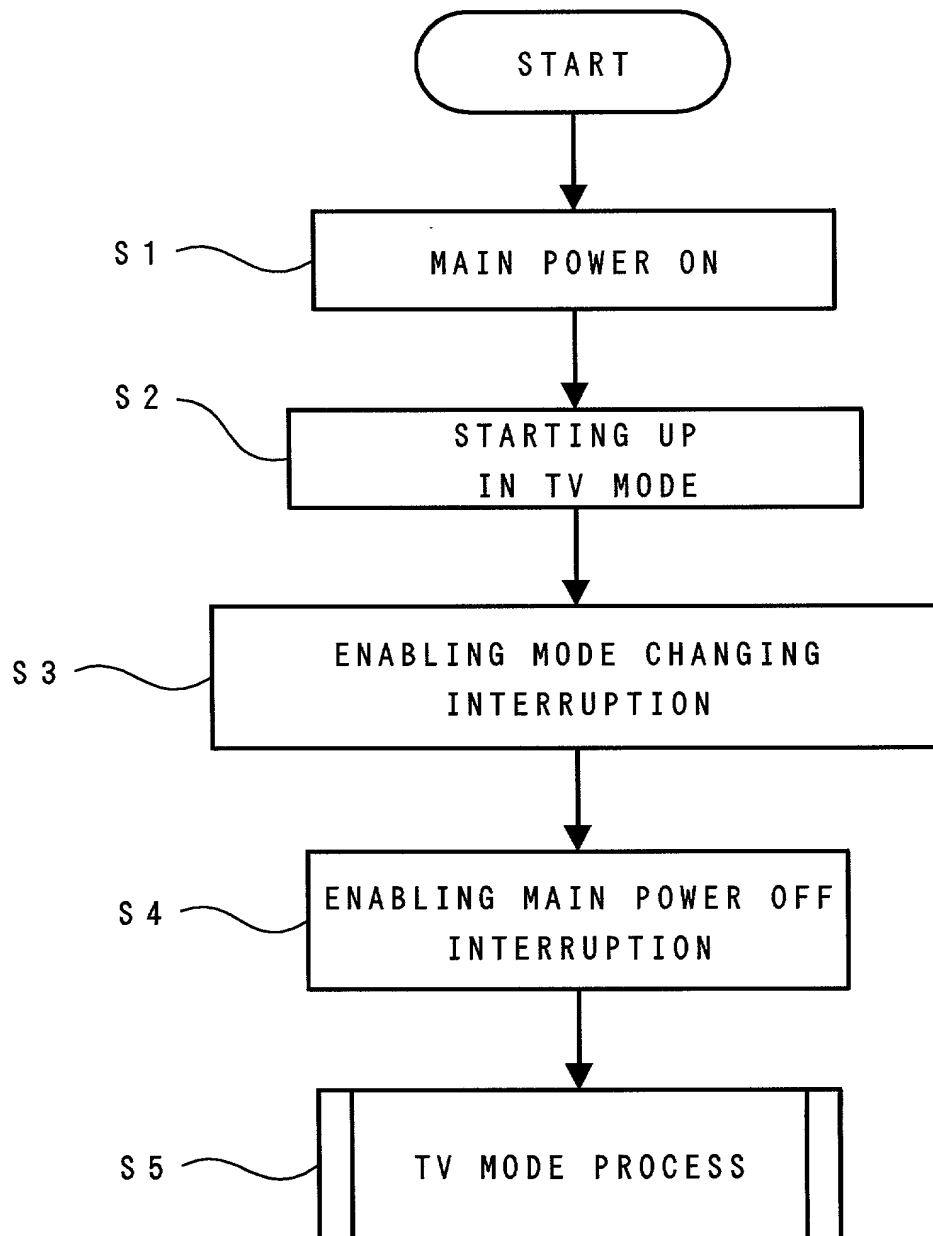


Fig.17

18/51

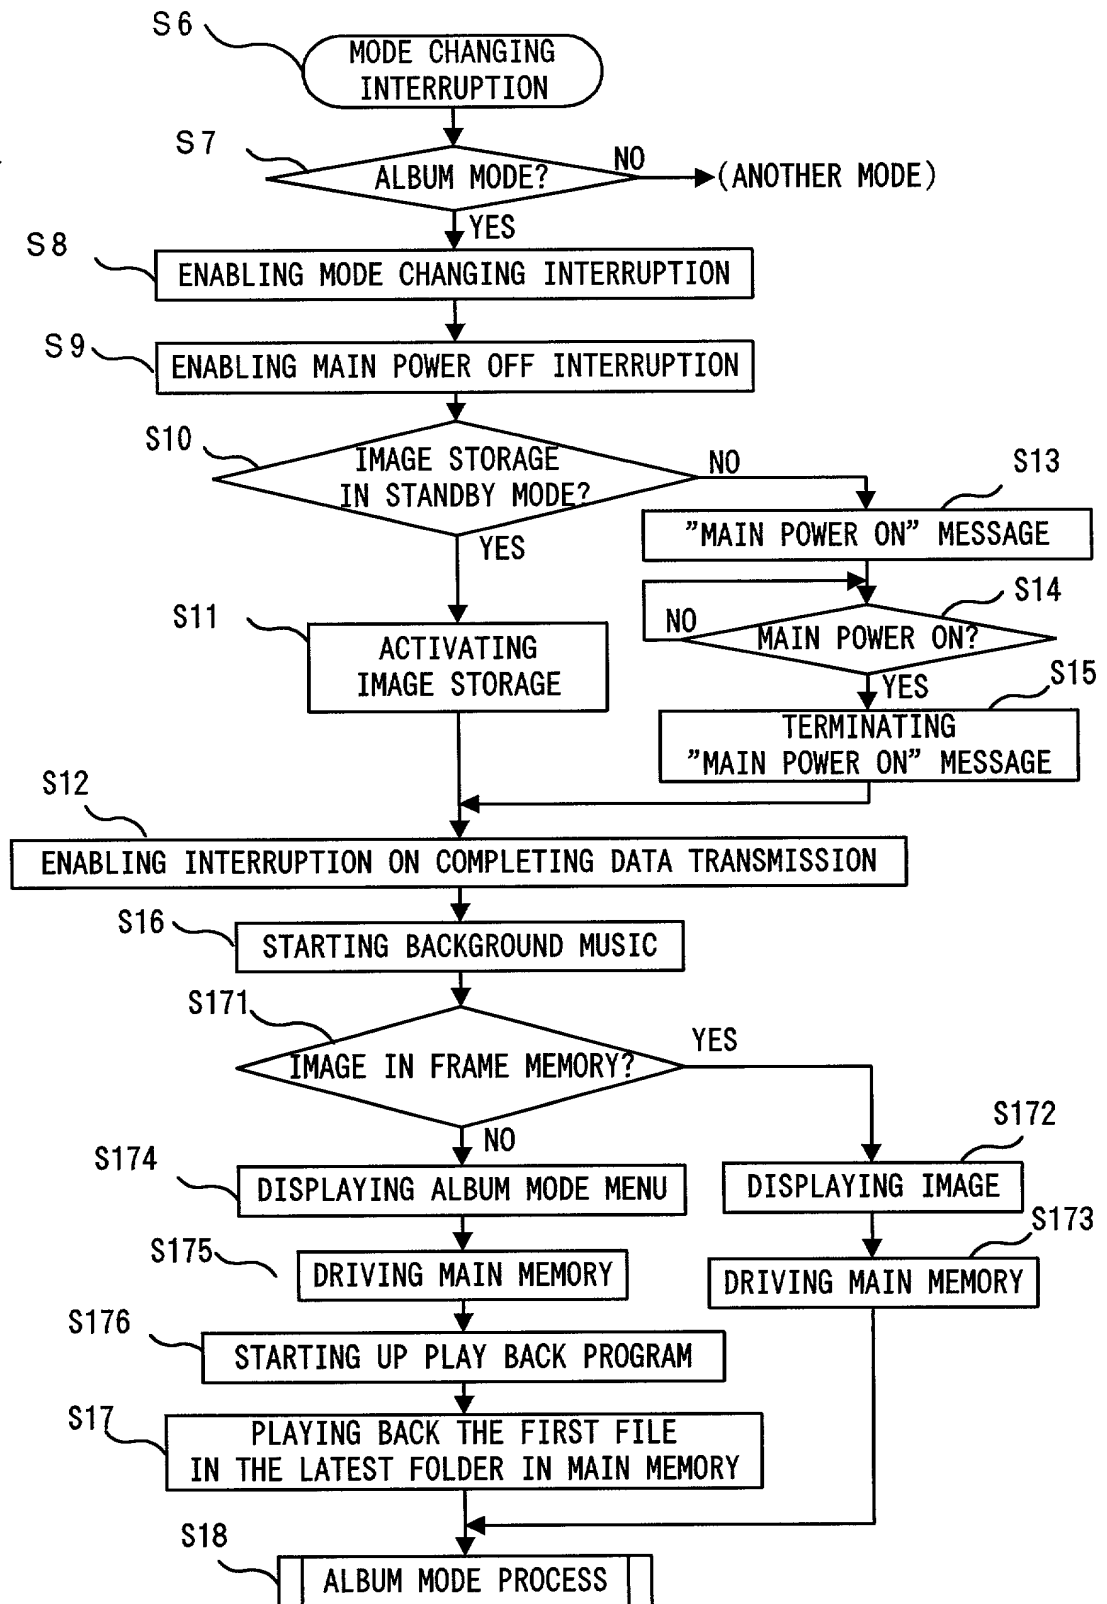


Fig.18



S 19

19 / 51

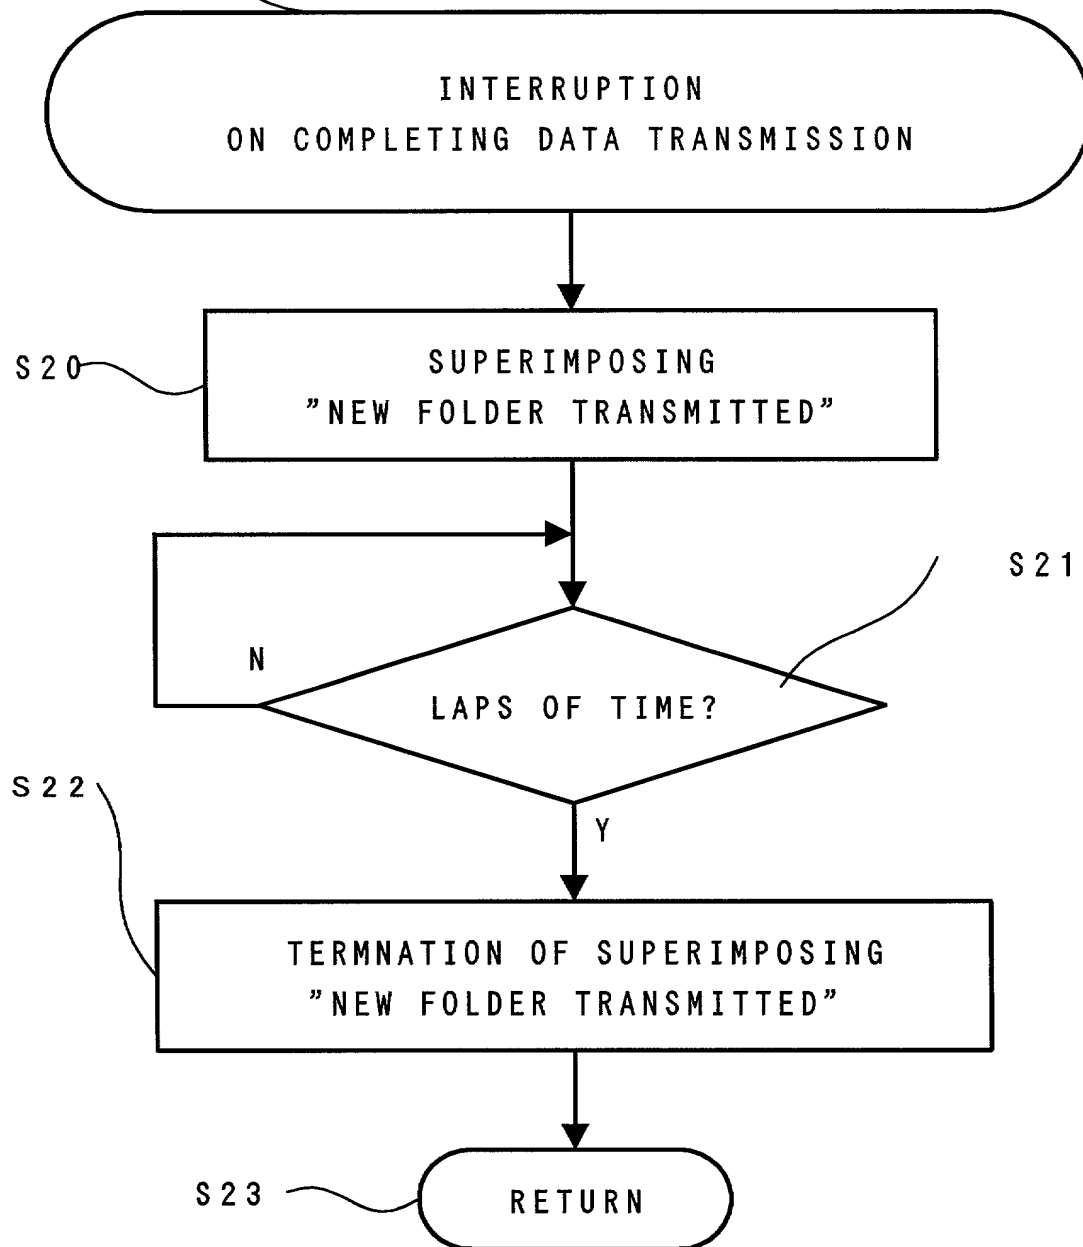


Fig. 19

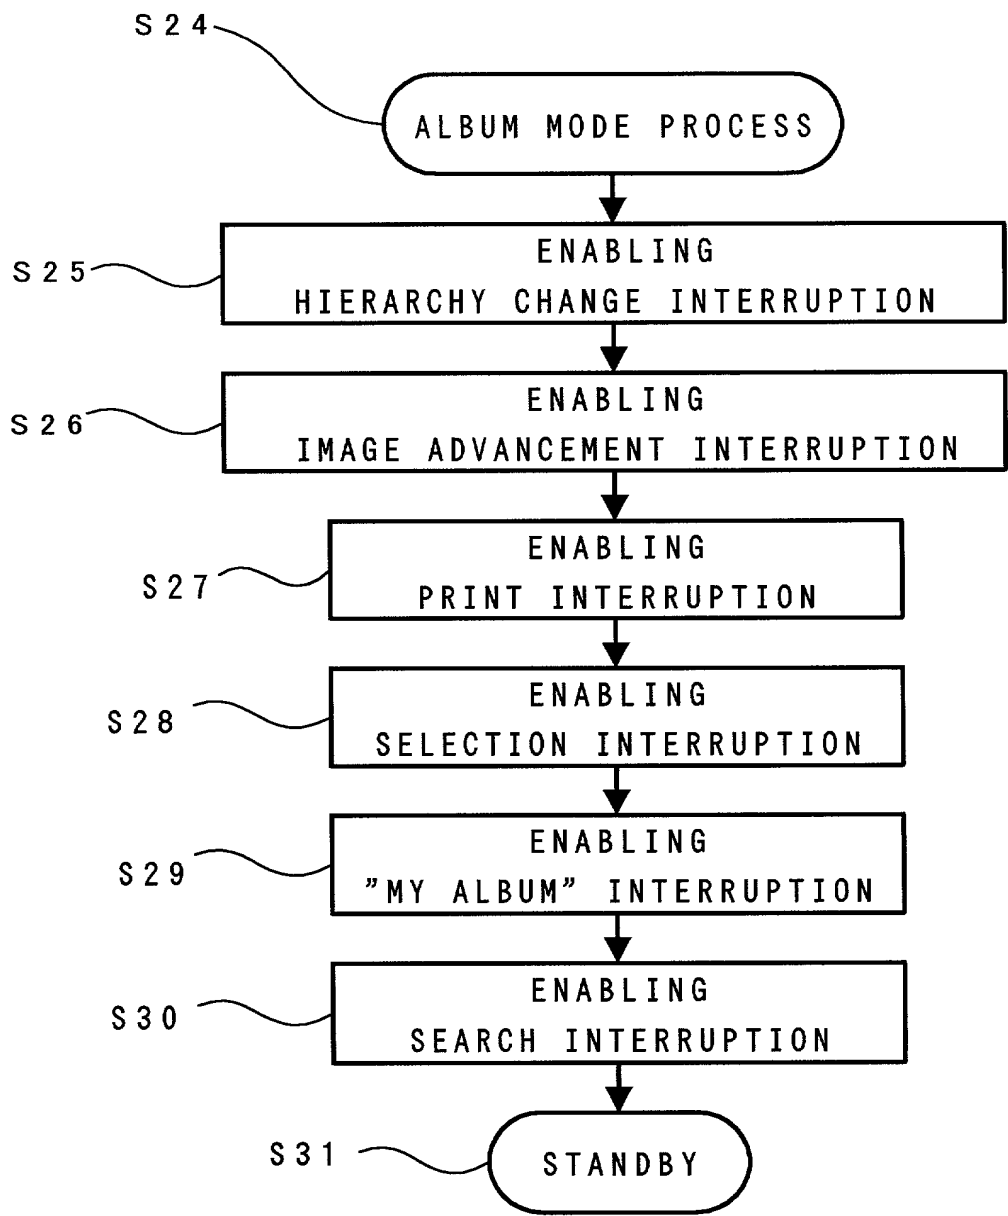


Fig.20

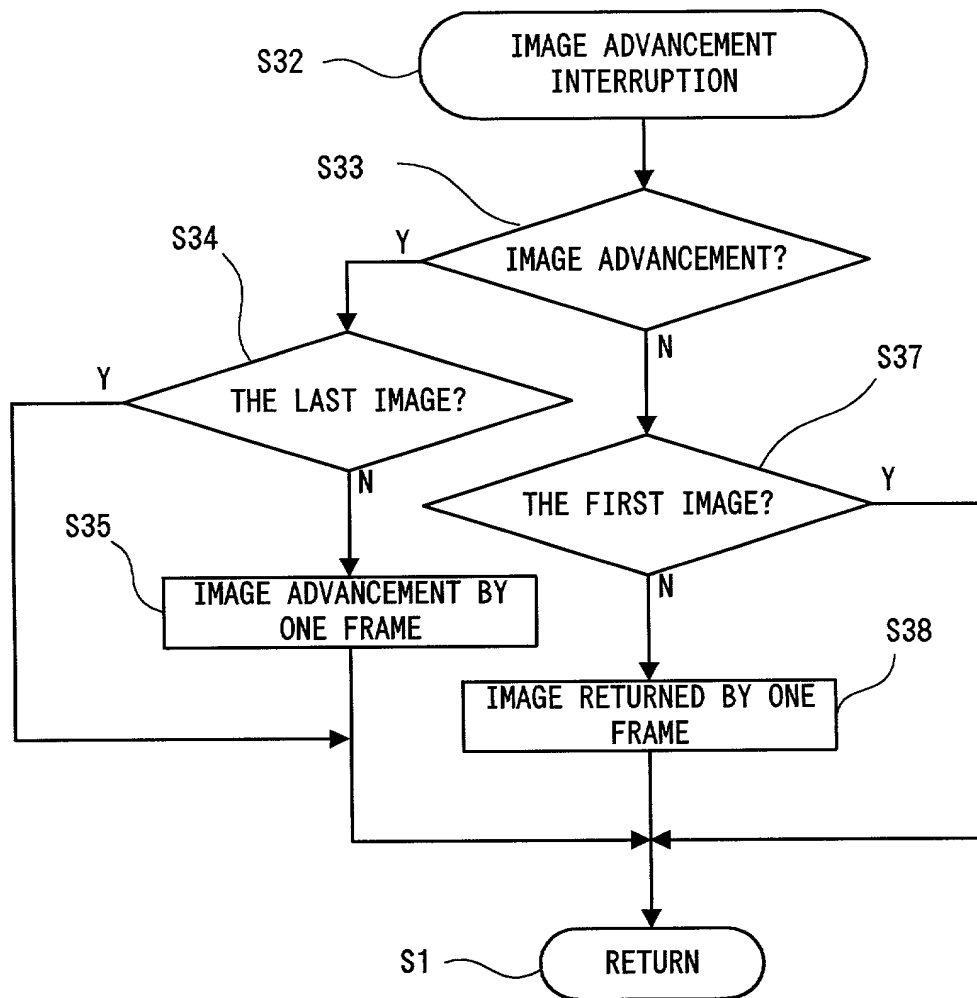


Fig.21

22/51

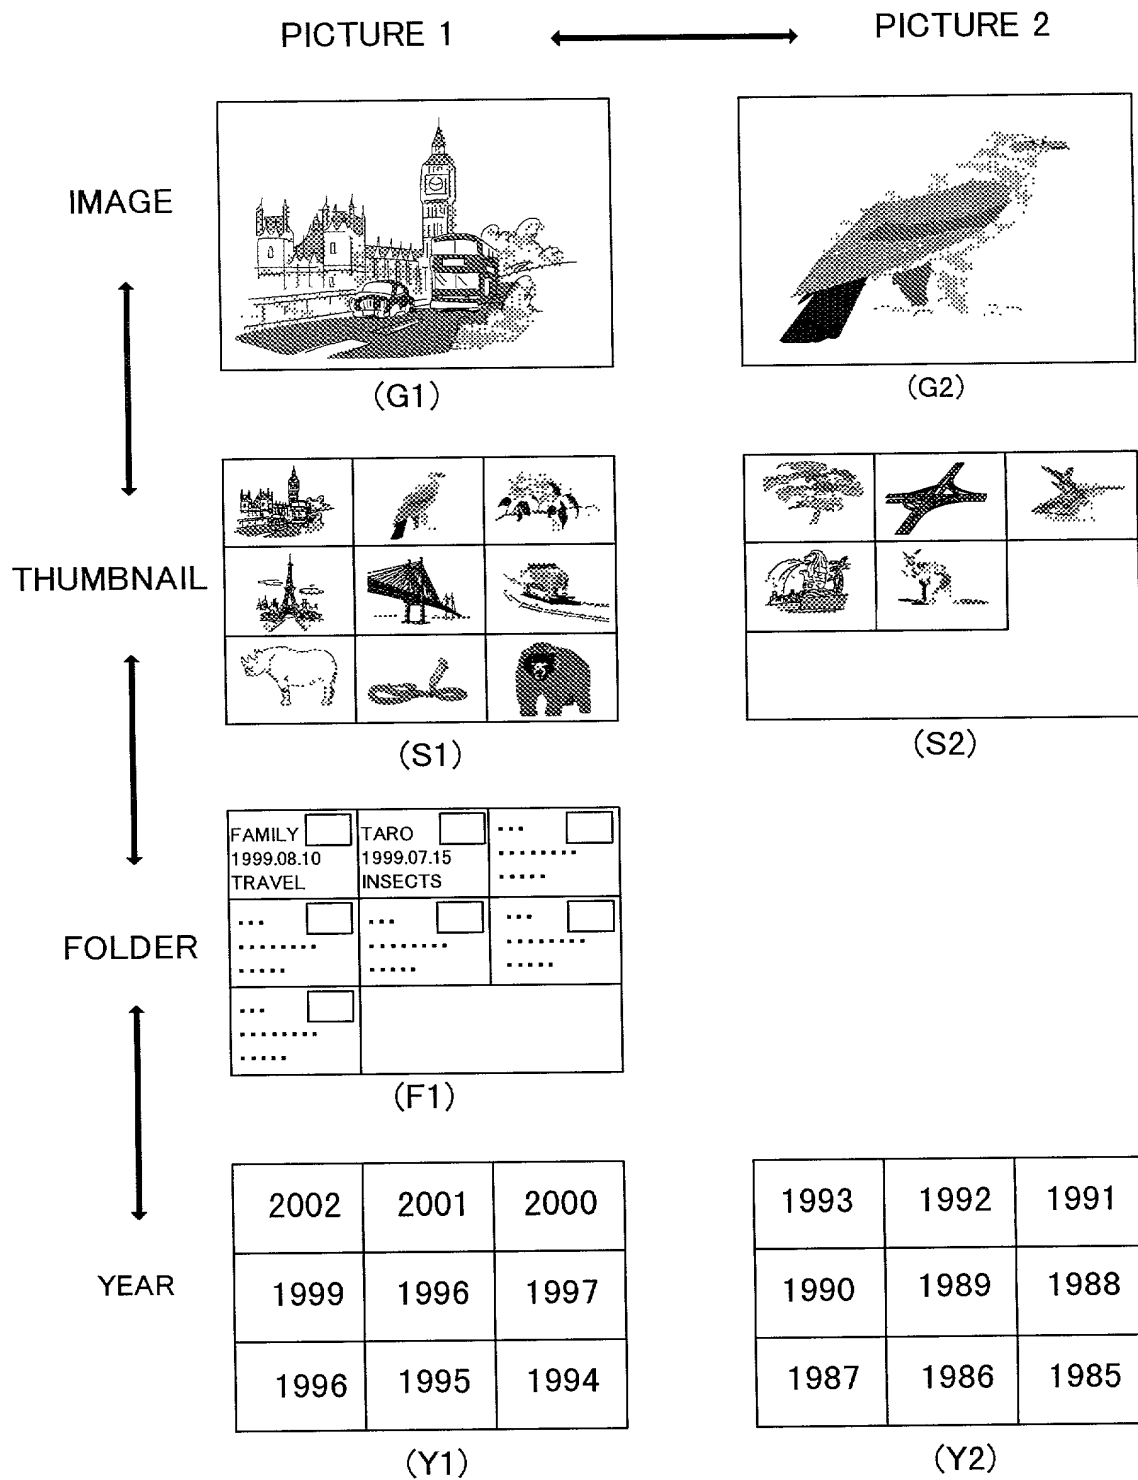


Fig. 22

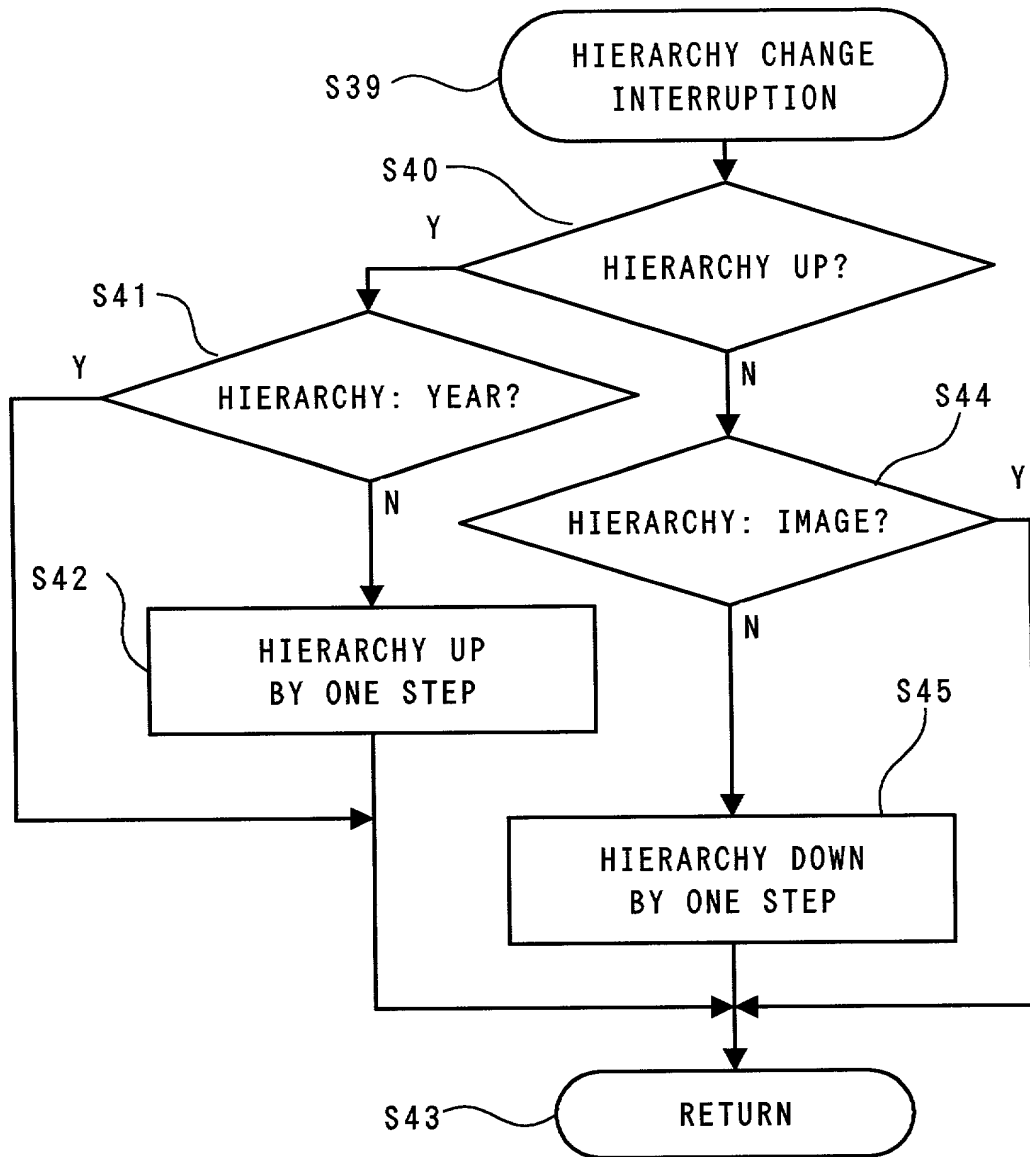


Fig.23

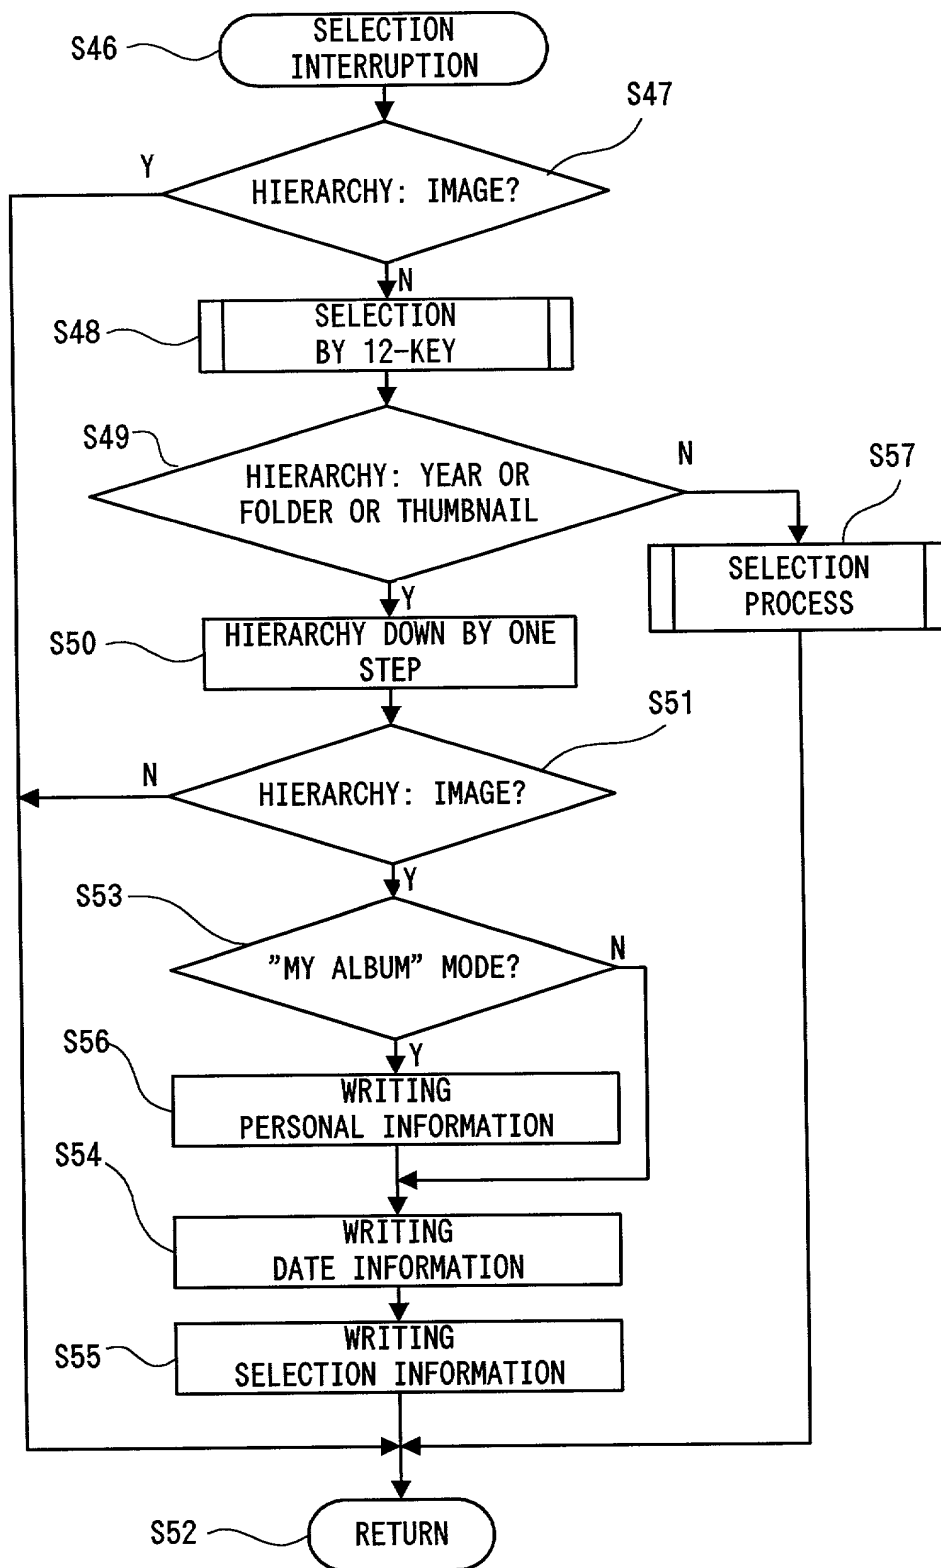


Fig.24

25 / 51

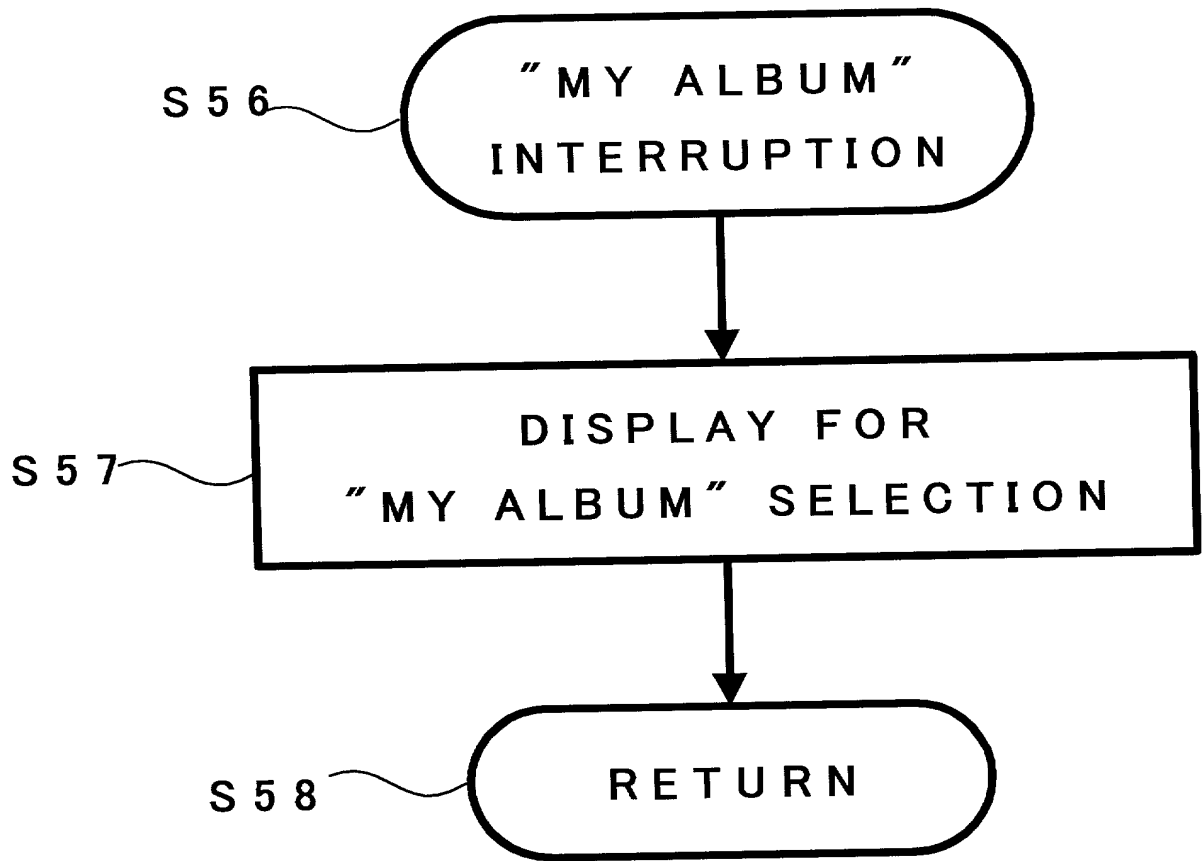


Fig.25

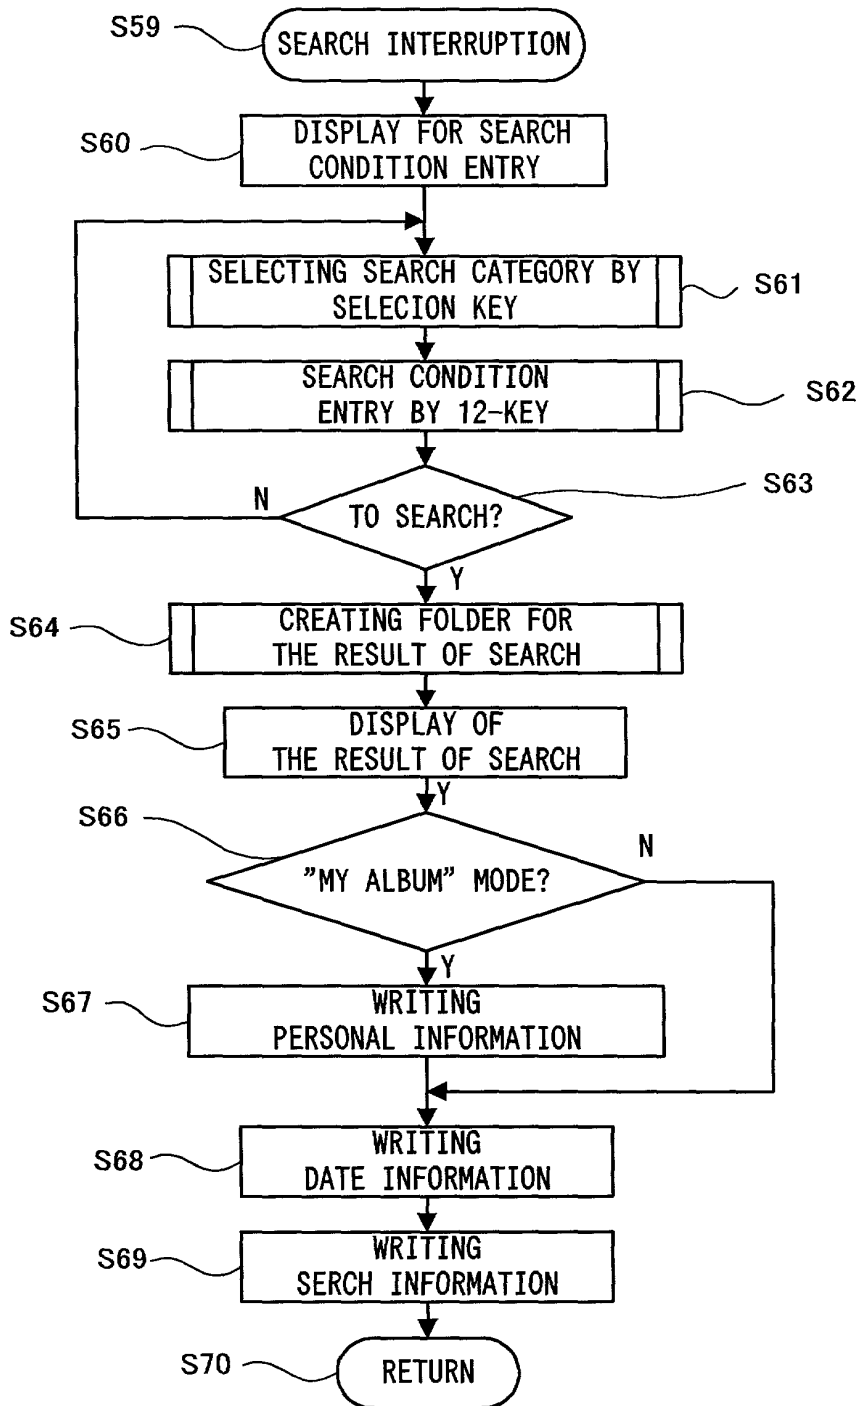


Fig. 26



27/51

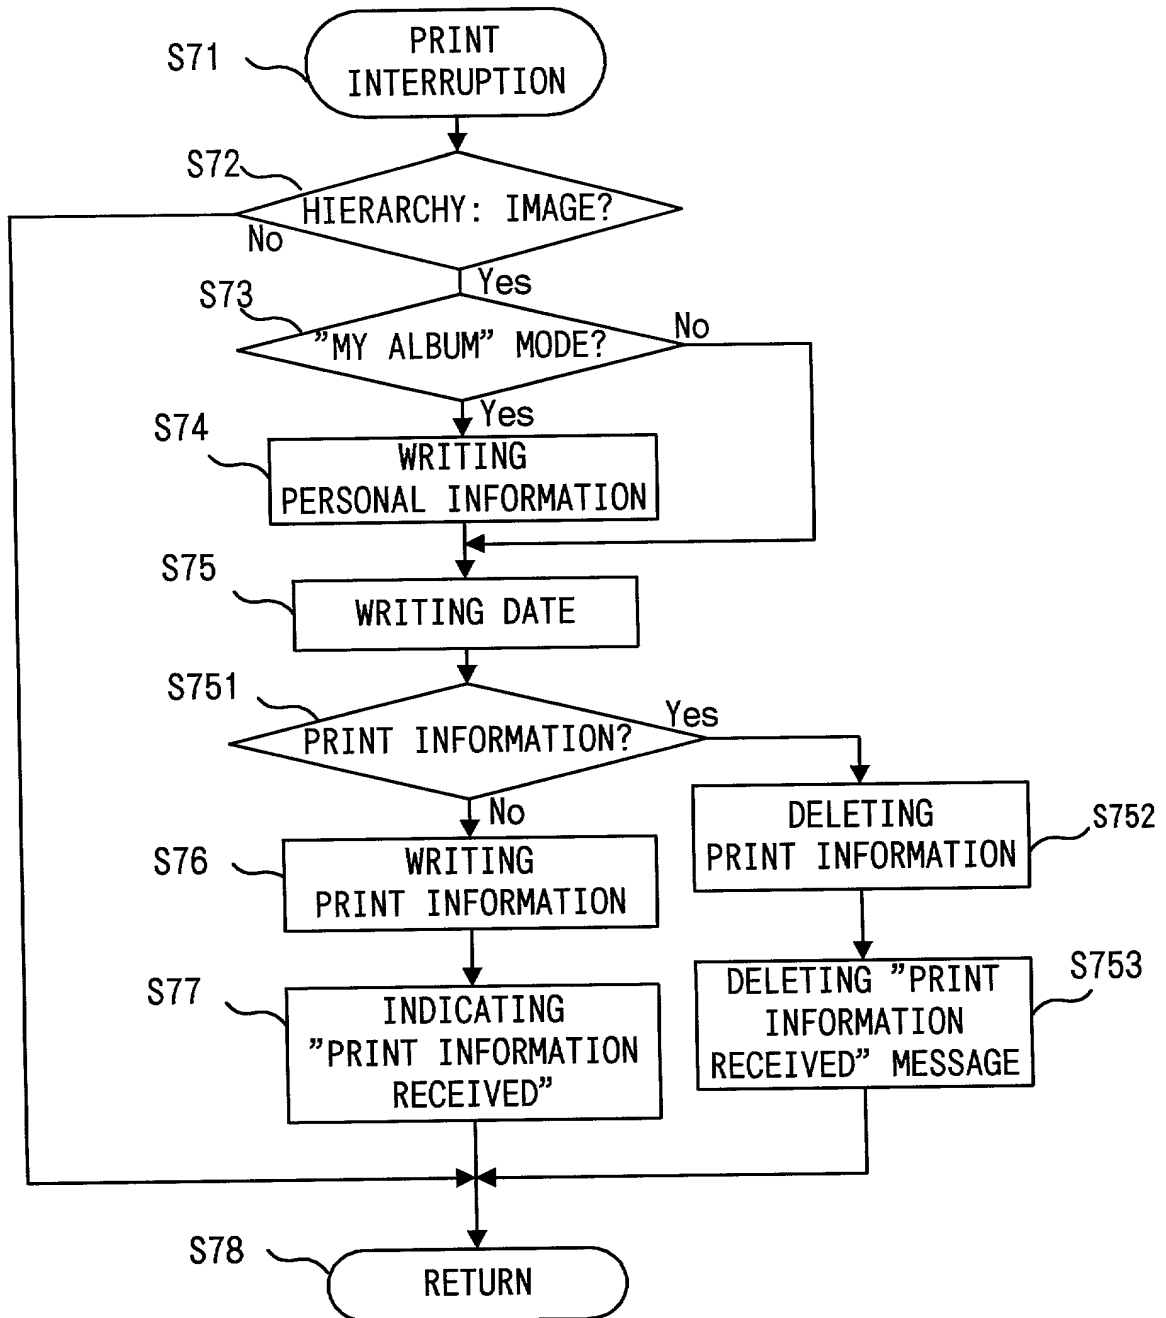


Fig.27

28/51

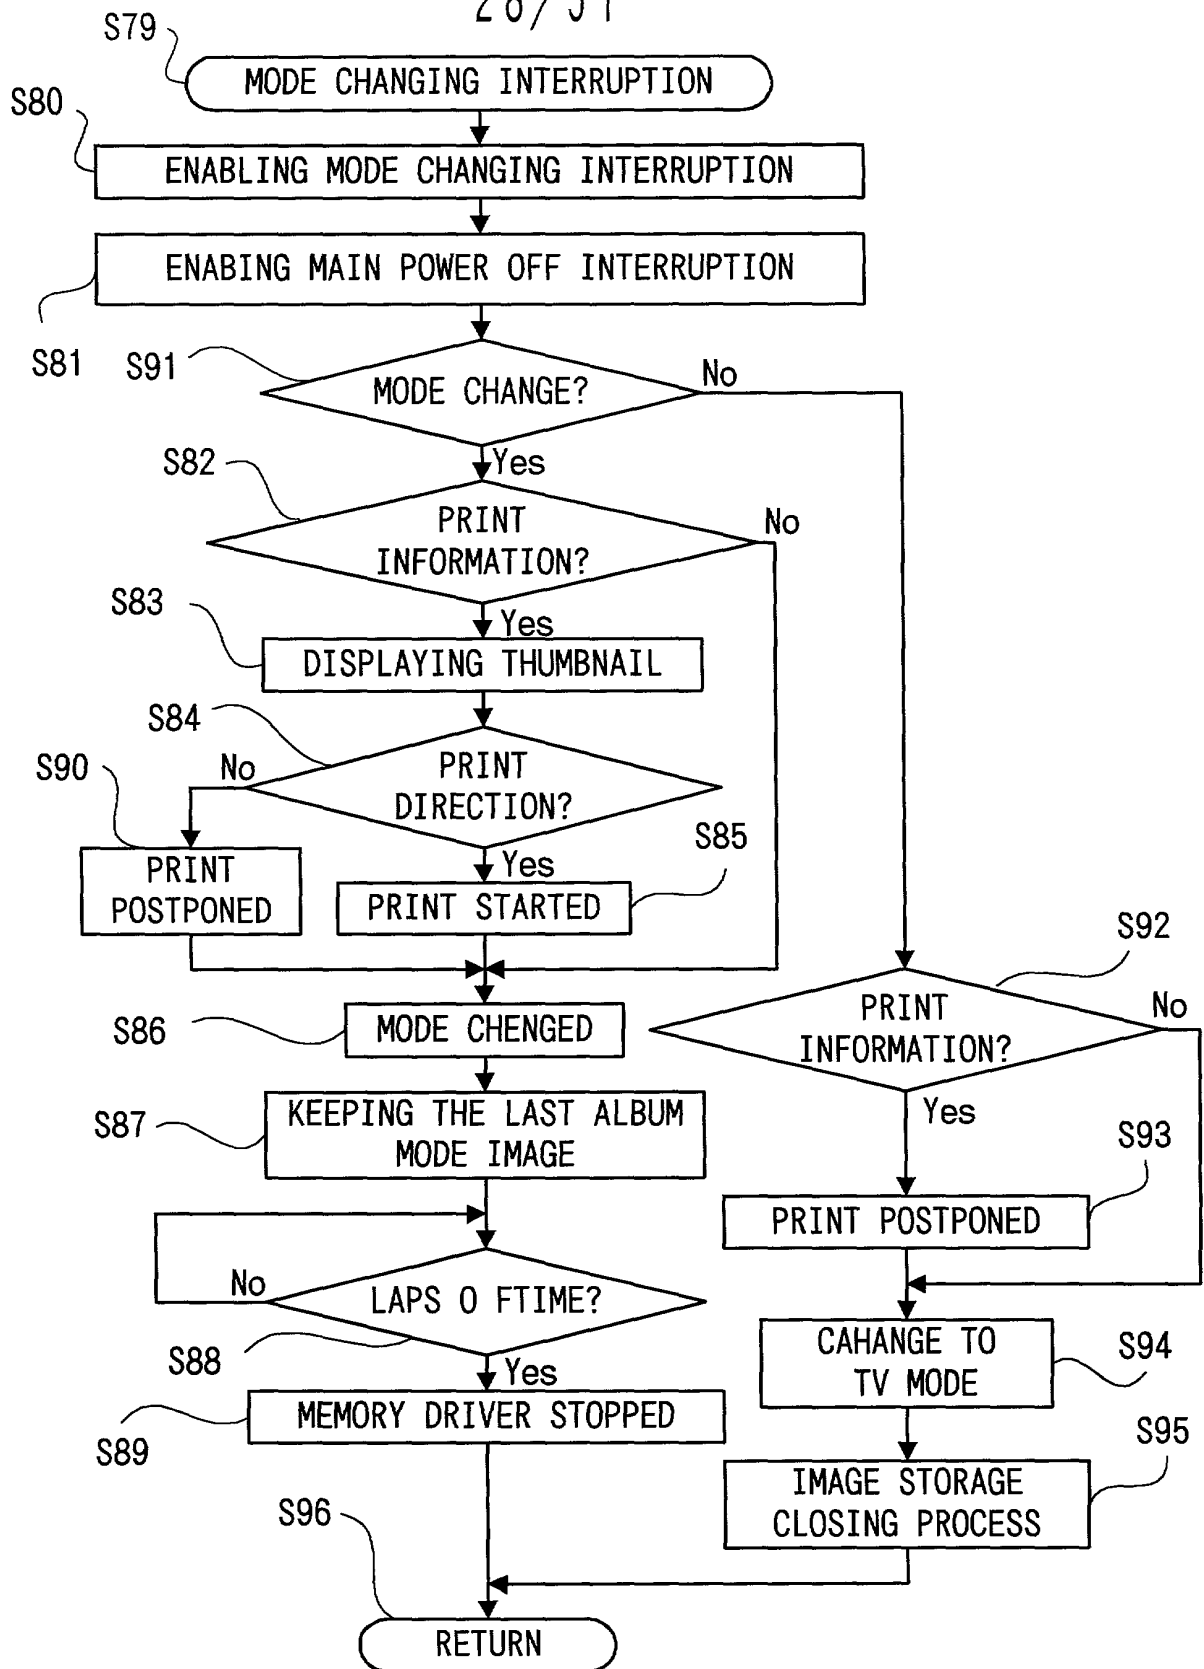


Fig. 28

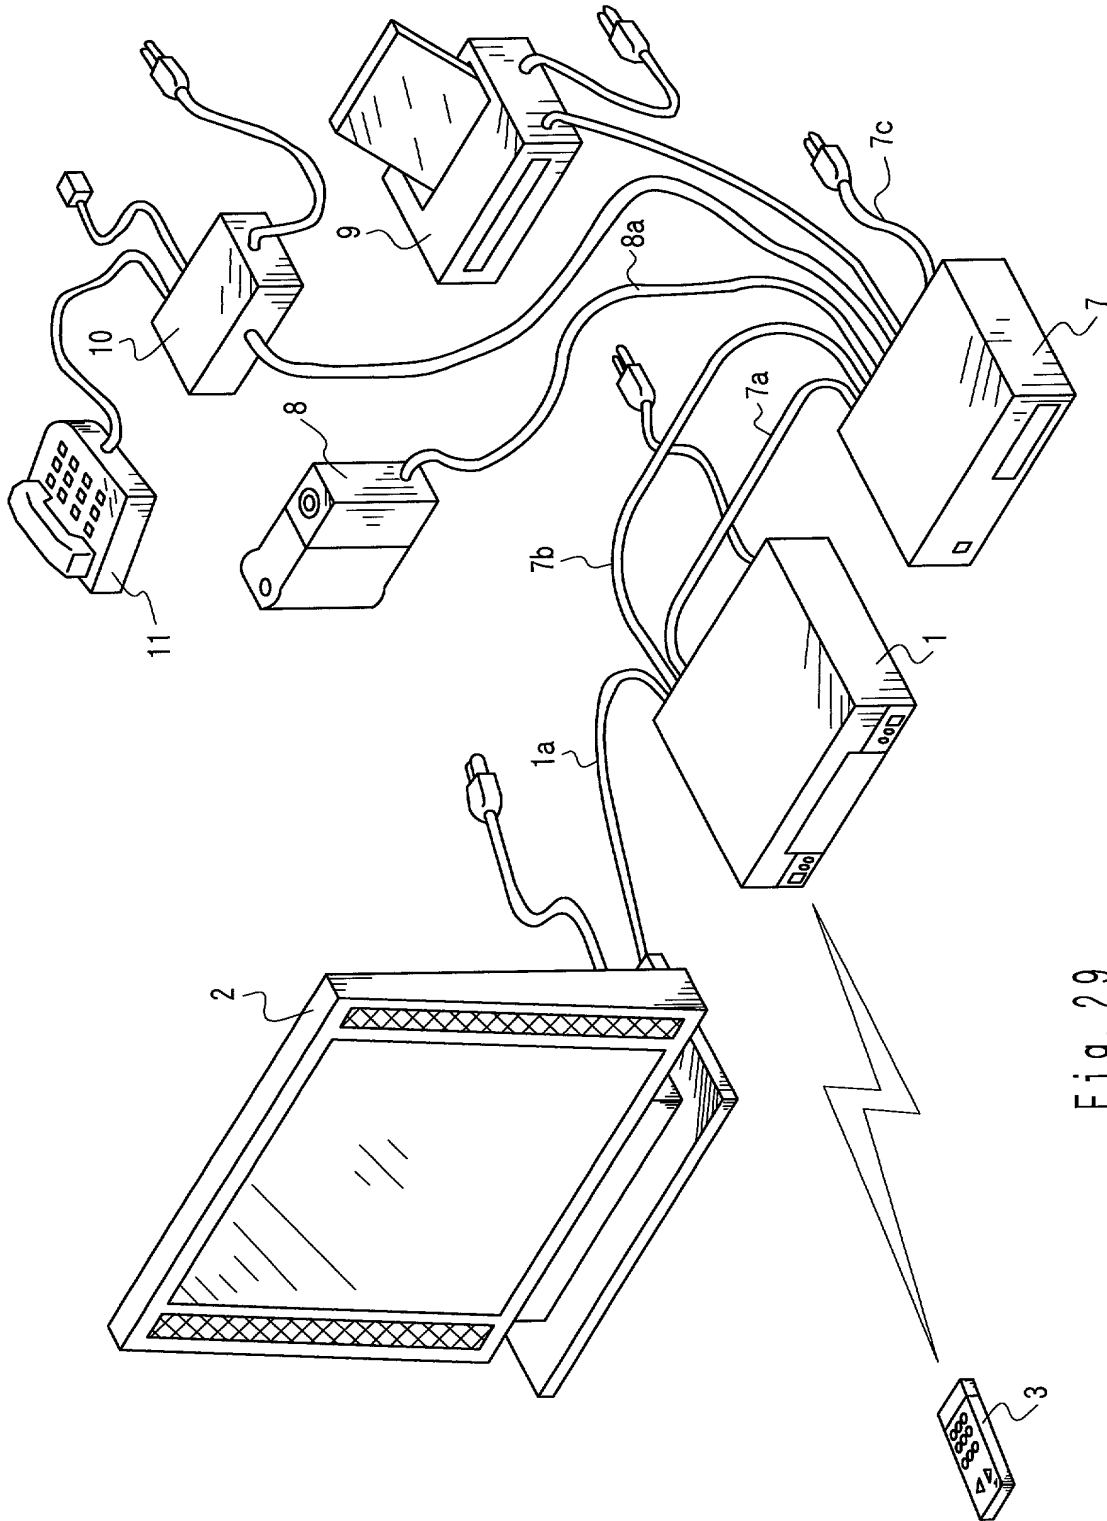


Fig. 29

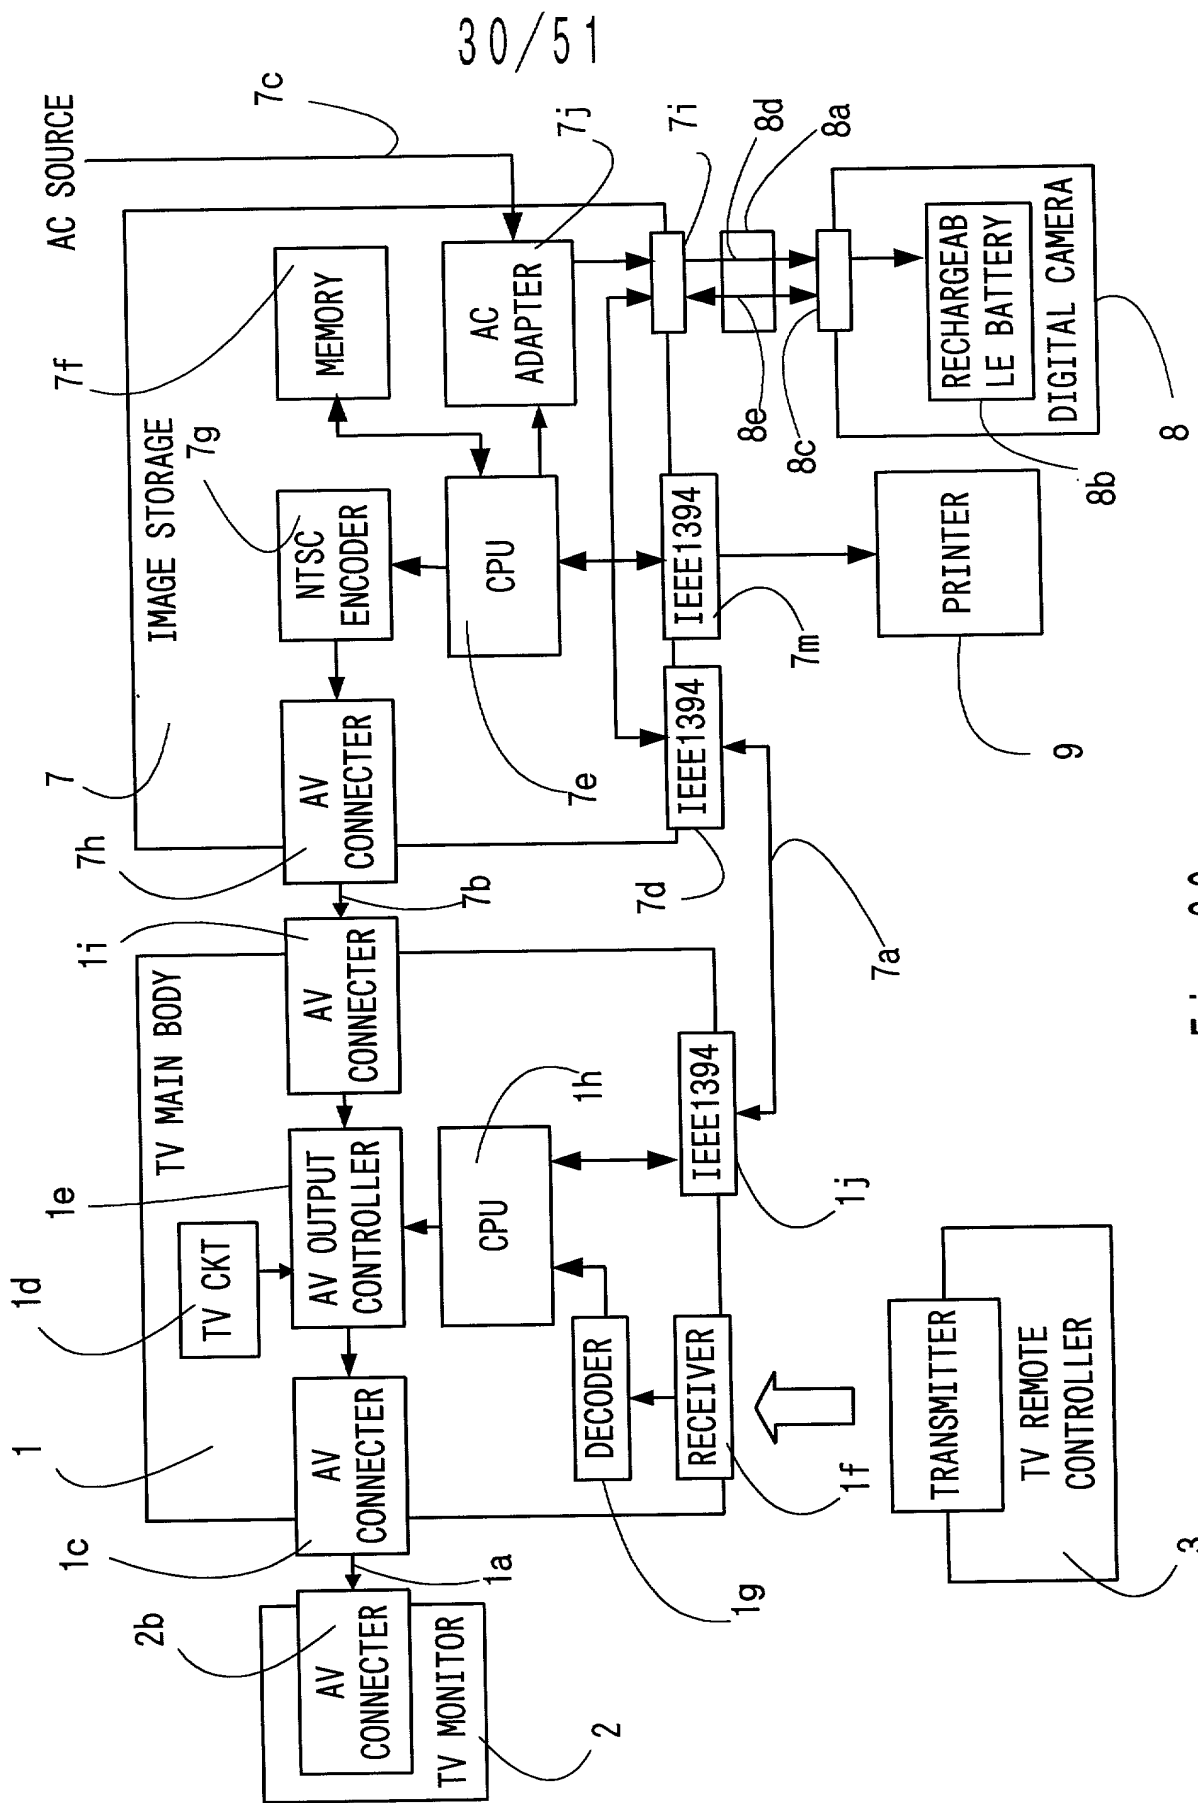


Fig. 30



**Fig.31**

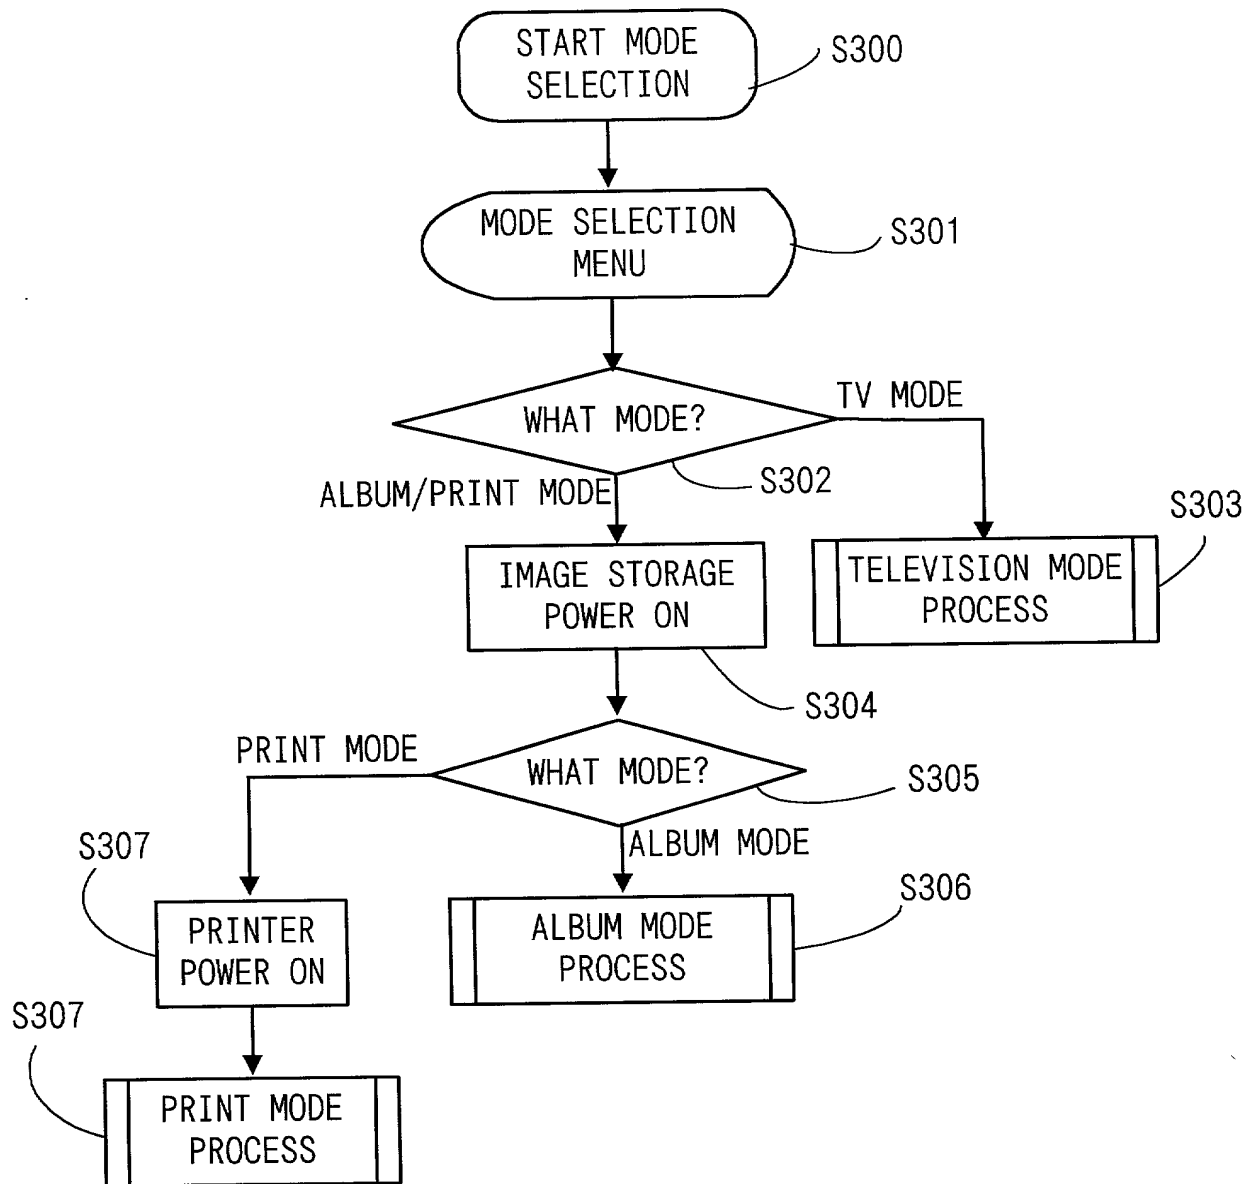


Fig.32

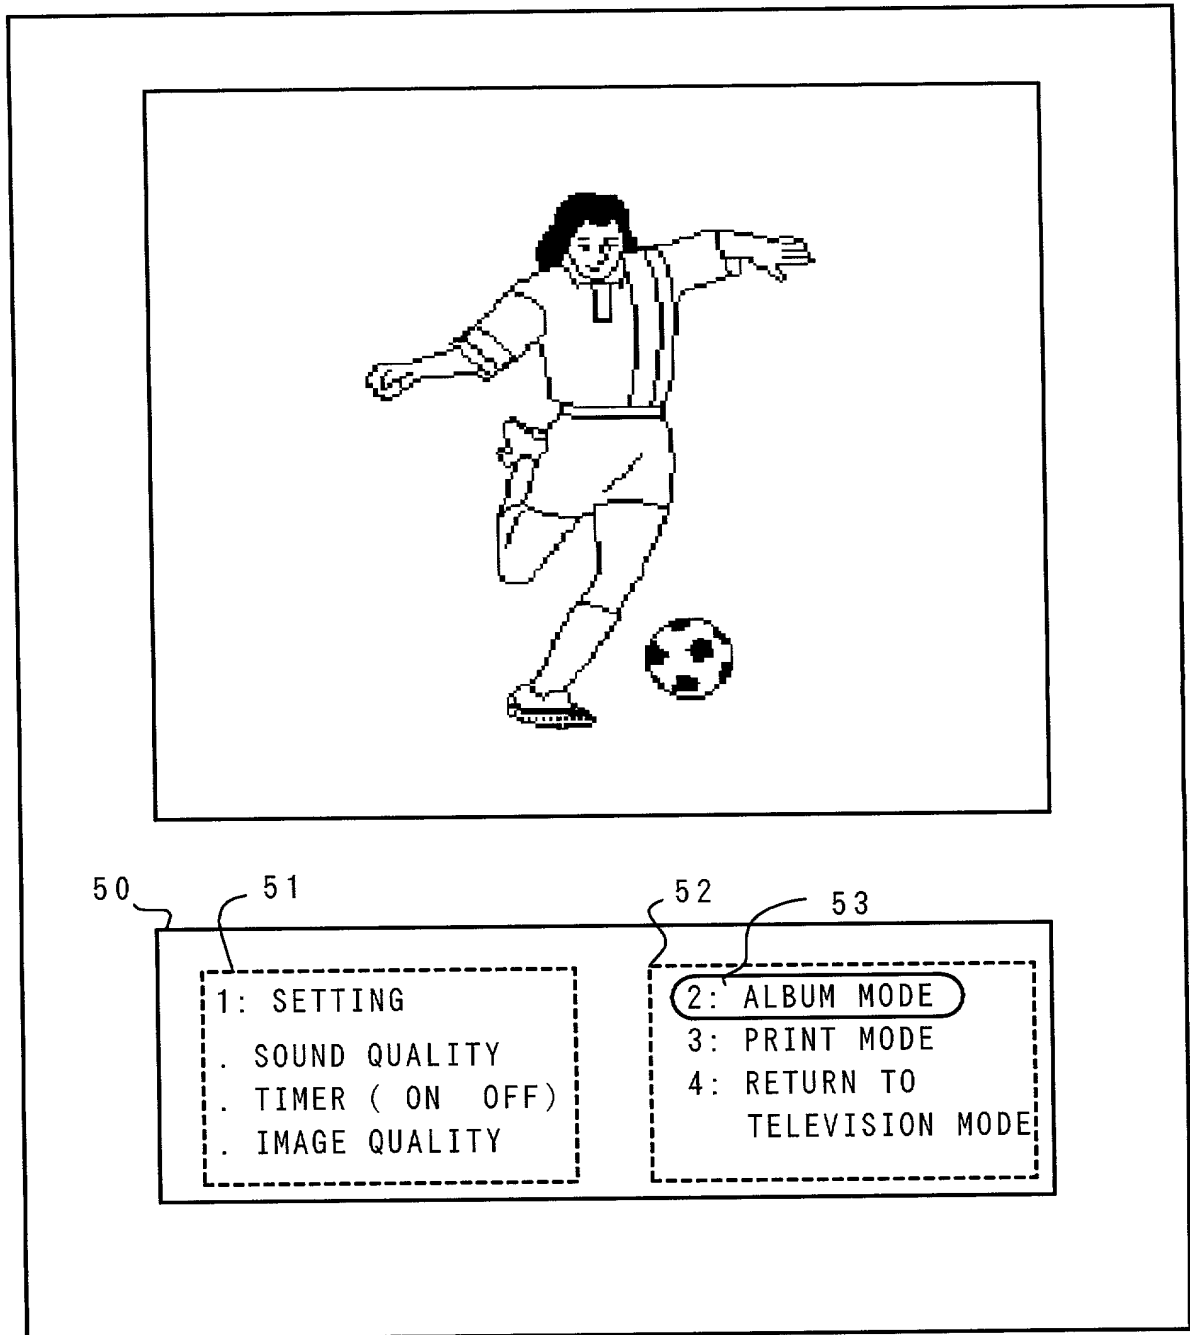


Fig. 33



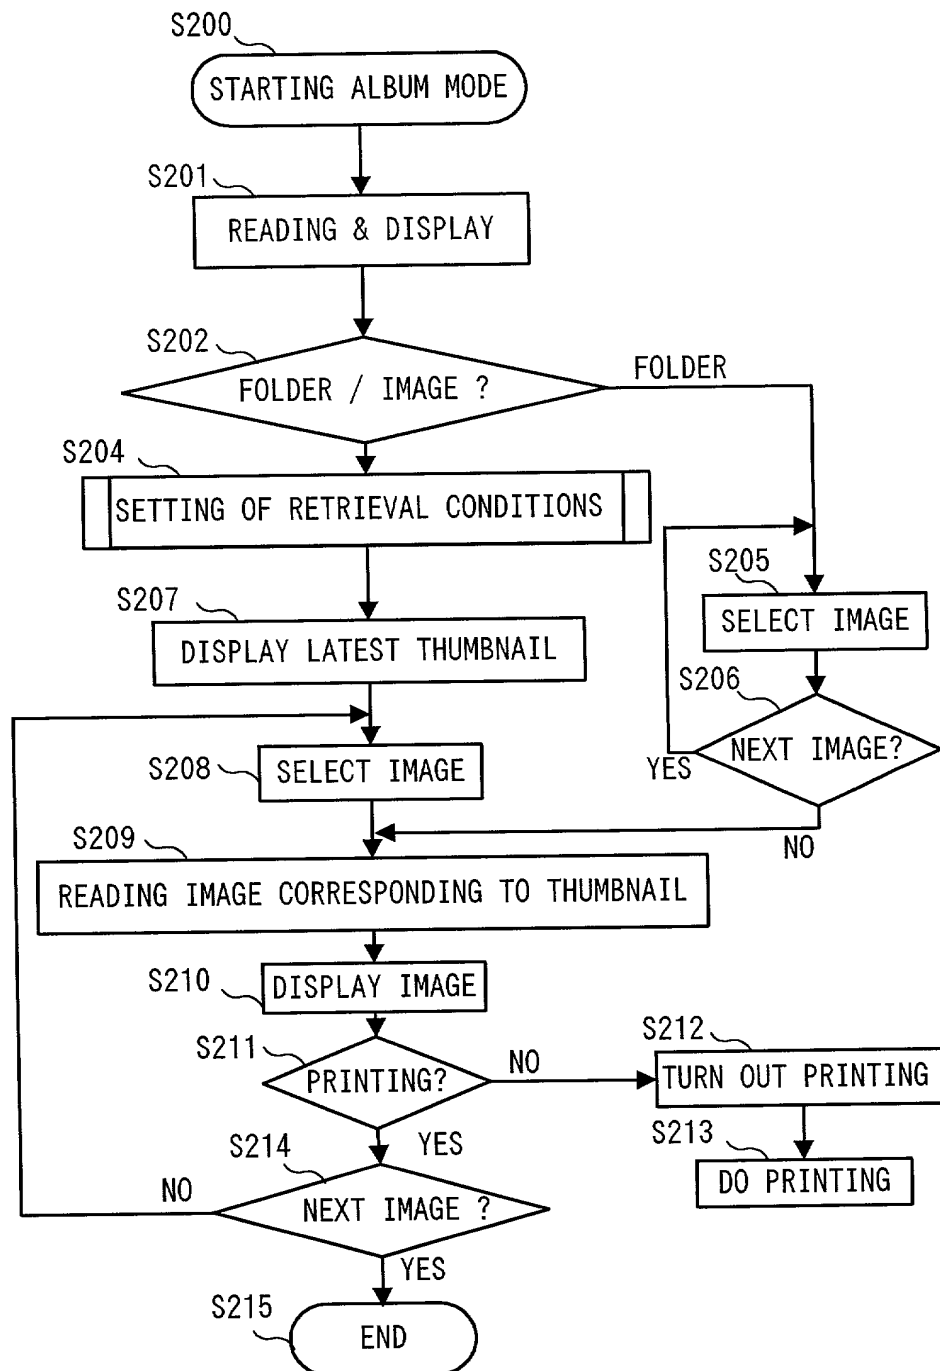



Fig. 34





30














No.1

No.2

No.3

No.4

...

FOLDER No.	RECHARGED DATE	PHOTOGRAPHY DATE	FOLDER NAME PHOTOGRAPHER ID	TITLE MEMO	NUMBER OF IMAGE	USED MEMORY (KB)
1	1999.01.20	1999.01.20	TARO	GOLF	26	15132
2	1998.10.18	1998.10.18	HANAKO	*	3	1236
3	1998.07.20	1998.07.20	HANAKO	ENTRANCE CEREMONY	13	8886
4	1998.04.05	1998.04.05	TARO	FISHING	3	1544
.....						
.....						
.....						

RETRIEVAL

0: FOLDER/ IMAGE RETRIEVAL

SORTING CONDITION

(1: PHOTOGRAPHY DATE 2: NAME OF PHOTOGRAPHER 3: TITLE )

PRINT MODE

TELEVISION MODE

Fig. 35

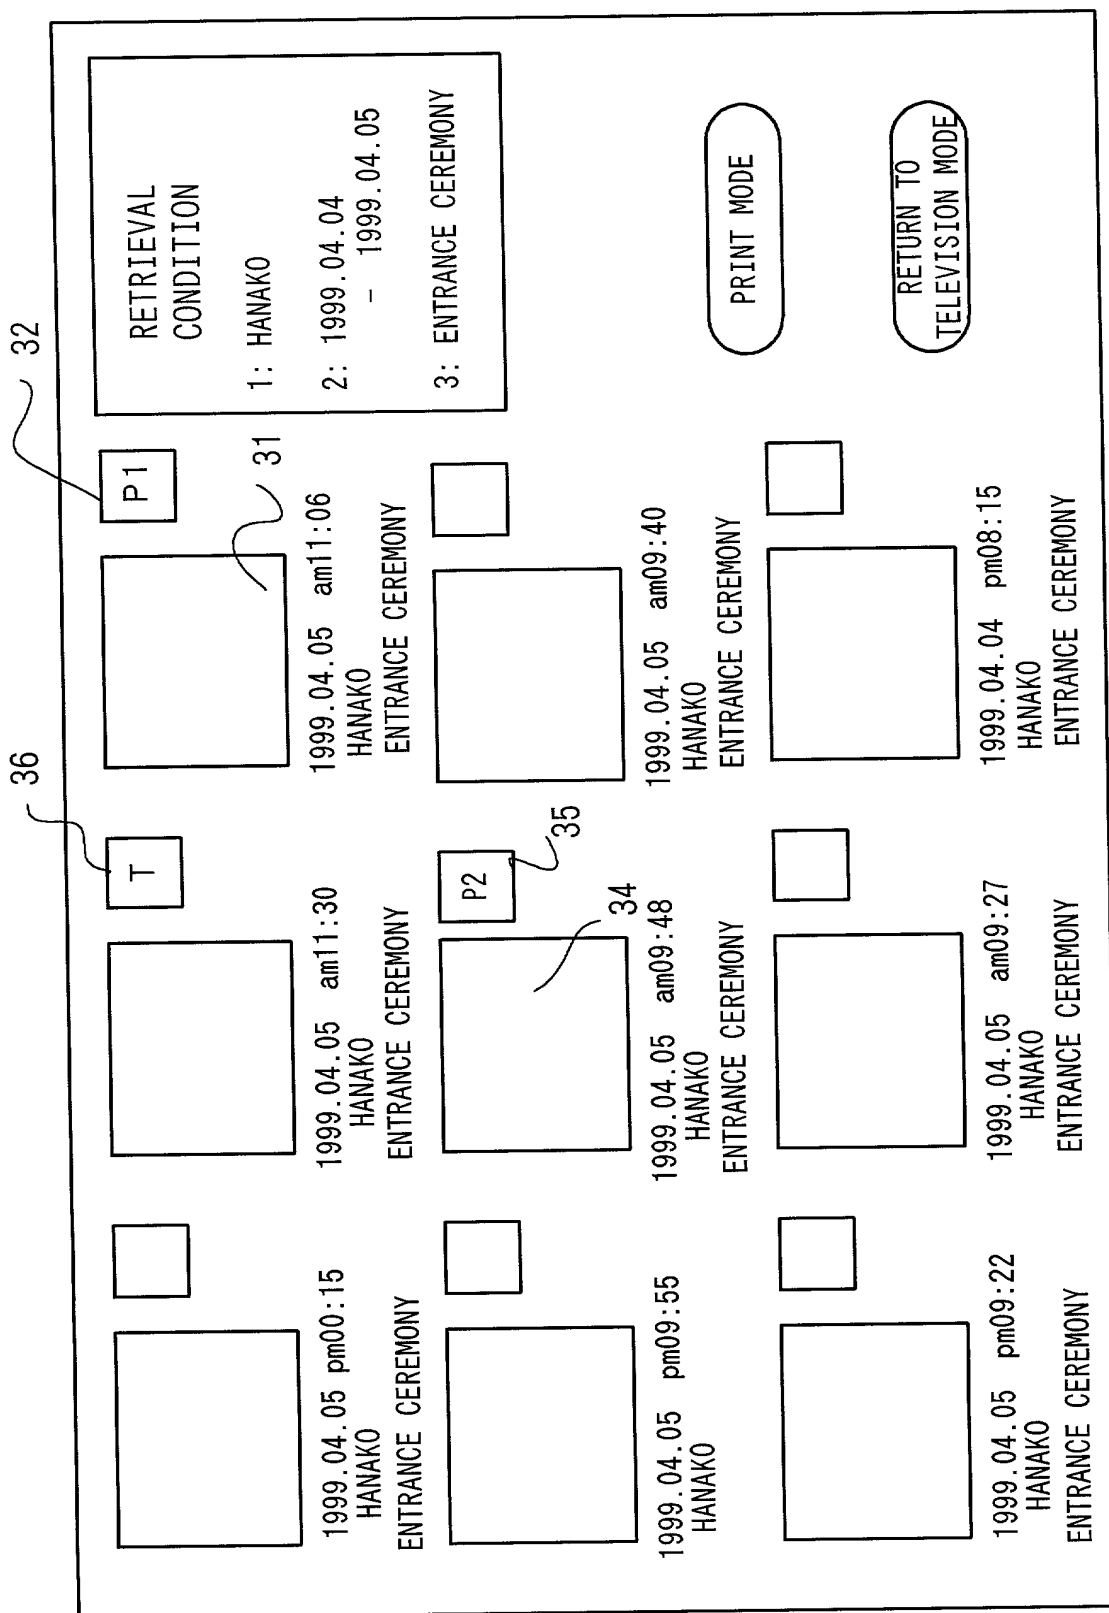


FIG. 36

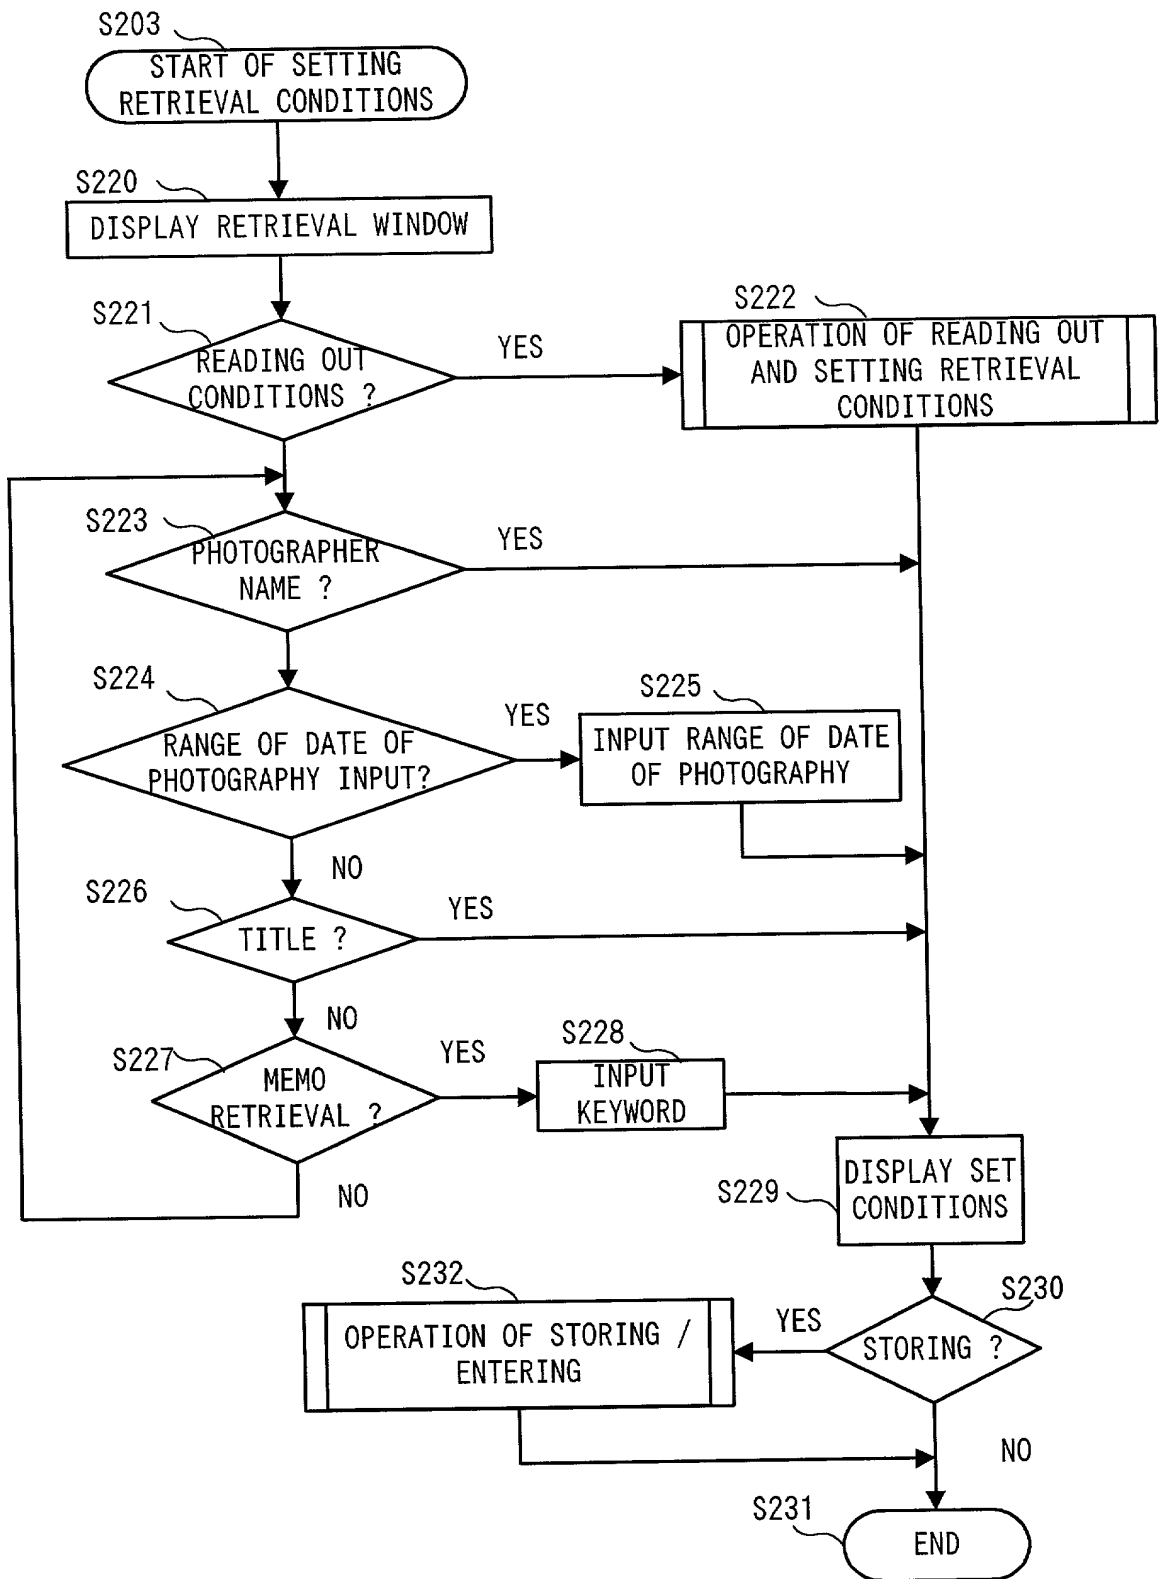


Fig. 37

SEARCH CONDITION

PHOTOGRAPHER : TARO HANAKO ICHIRO

PHOTOGRAPHY DATE : APRIL 4,1999 - APRIL 5,1999

TITLE : FISHING ,ENTRANCE CEREMONY , GRADUATION CEREMONY , FAMILY , PTA

MEMO : (POSSIBLE TO SEARCH WITH FREE KEYWORD)

STOEING PRIORITY

1. PHOTOGRPHY DATE

2. PHOTOGRAPHER

3. TITLE

☐ ALBUM

0:READ OUT 1:STORE 2:SEARCH CONDITION ITEM/ DERETE/ADD/ENTER OF SELECTED ITEM

☐ ALDISPLAY CODE TABLE FOR CREATING LETTER

PRINT MODE

TELEVISION MODE

Fig. 38

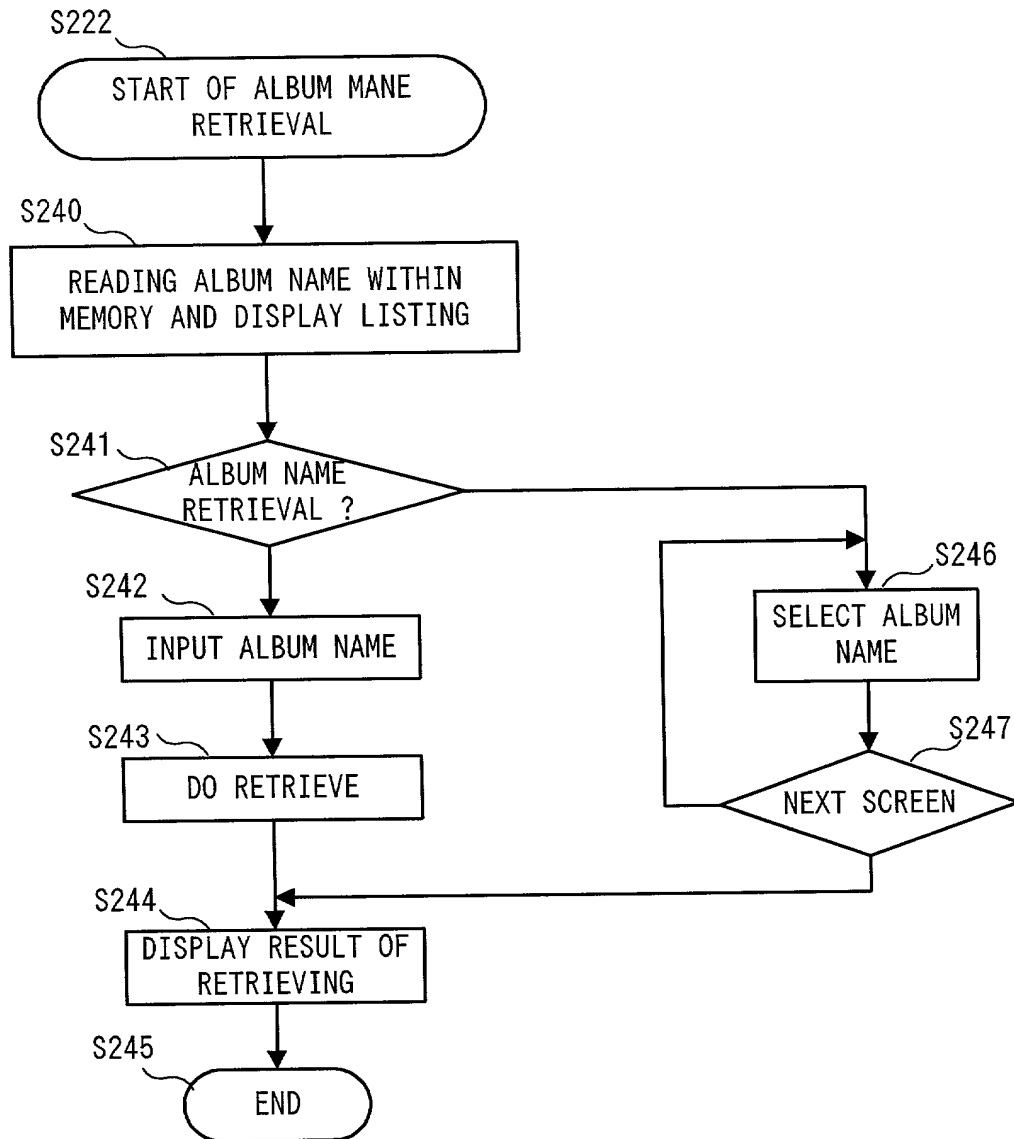


Fig. 39

FOLDER No.	ALBUM NAME	PHOTOGRAPHY DATE	CREATOR	MEMORY CAPACITY (KB)
1	COOKING SCHOOL	1999.01.20	HANAKO	6
2	TRAVEL	1998.10.18	HANAKO	8
3	FISHING	1998.07.20	HANAKO	3
4	ENTRANCE CEREMONY	1998.04.05	TARO	5

PRINT MODE

TELEVISION MODE

Fig. 40

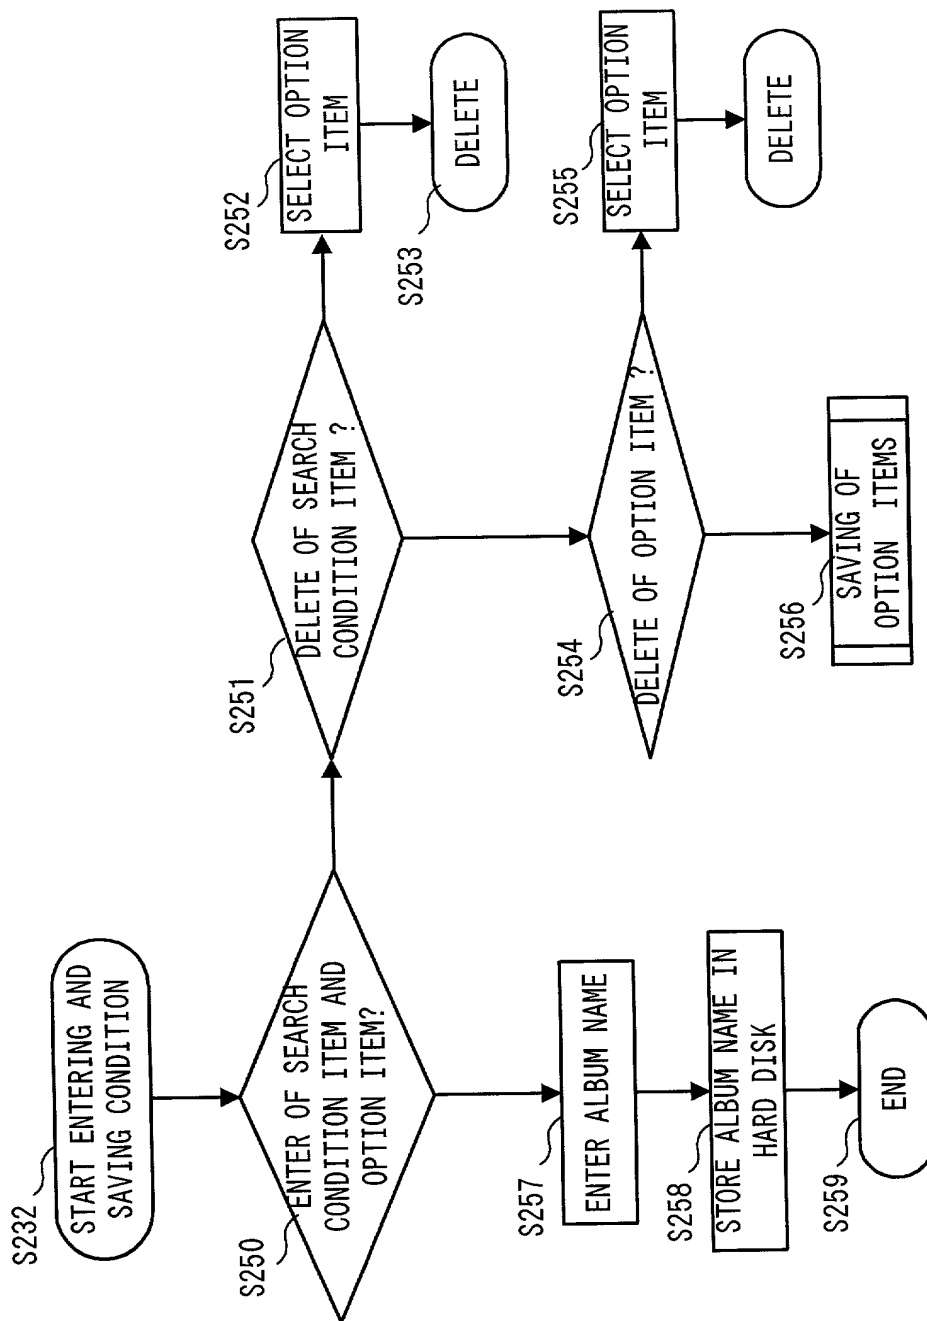


Fig. 41

42/51

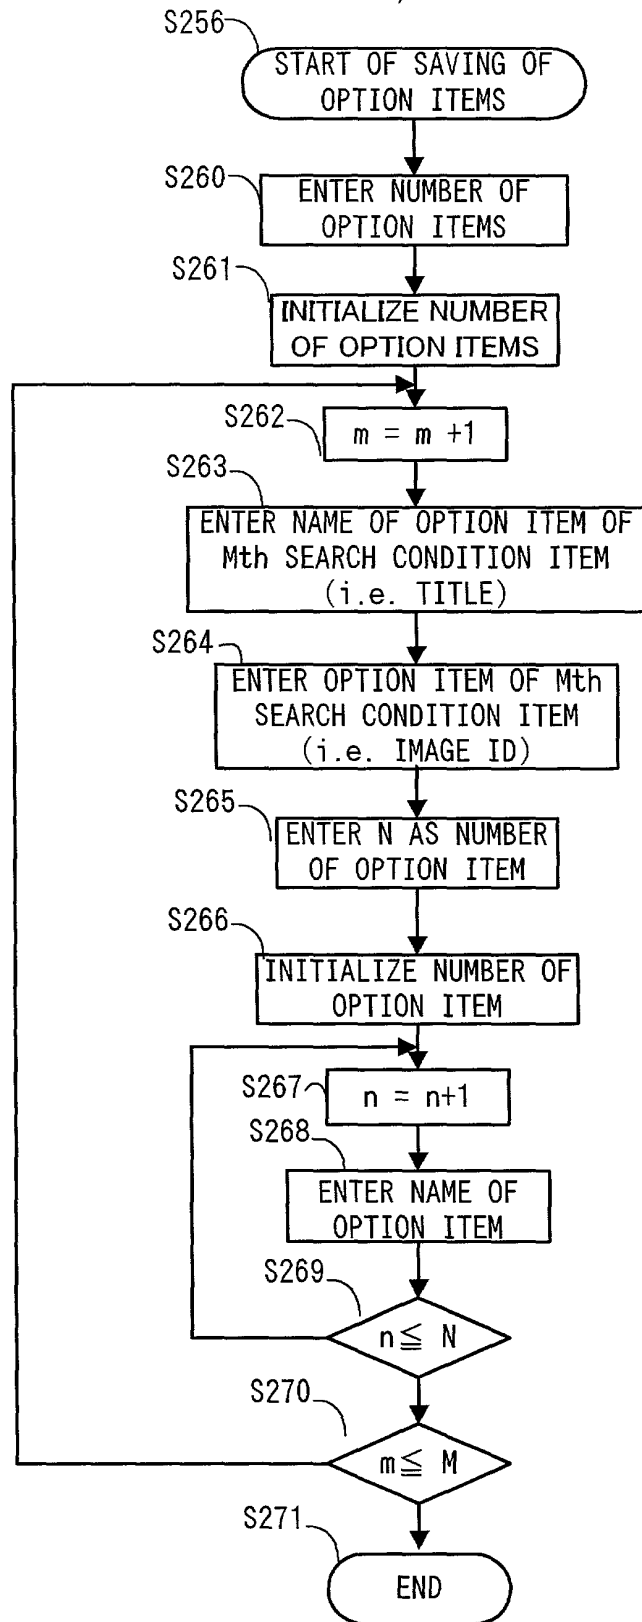


Fig. 42



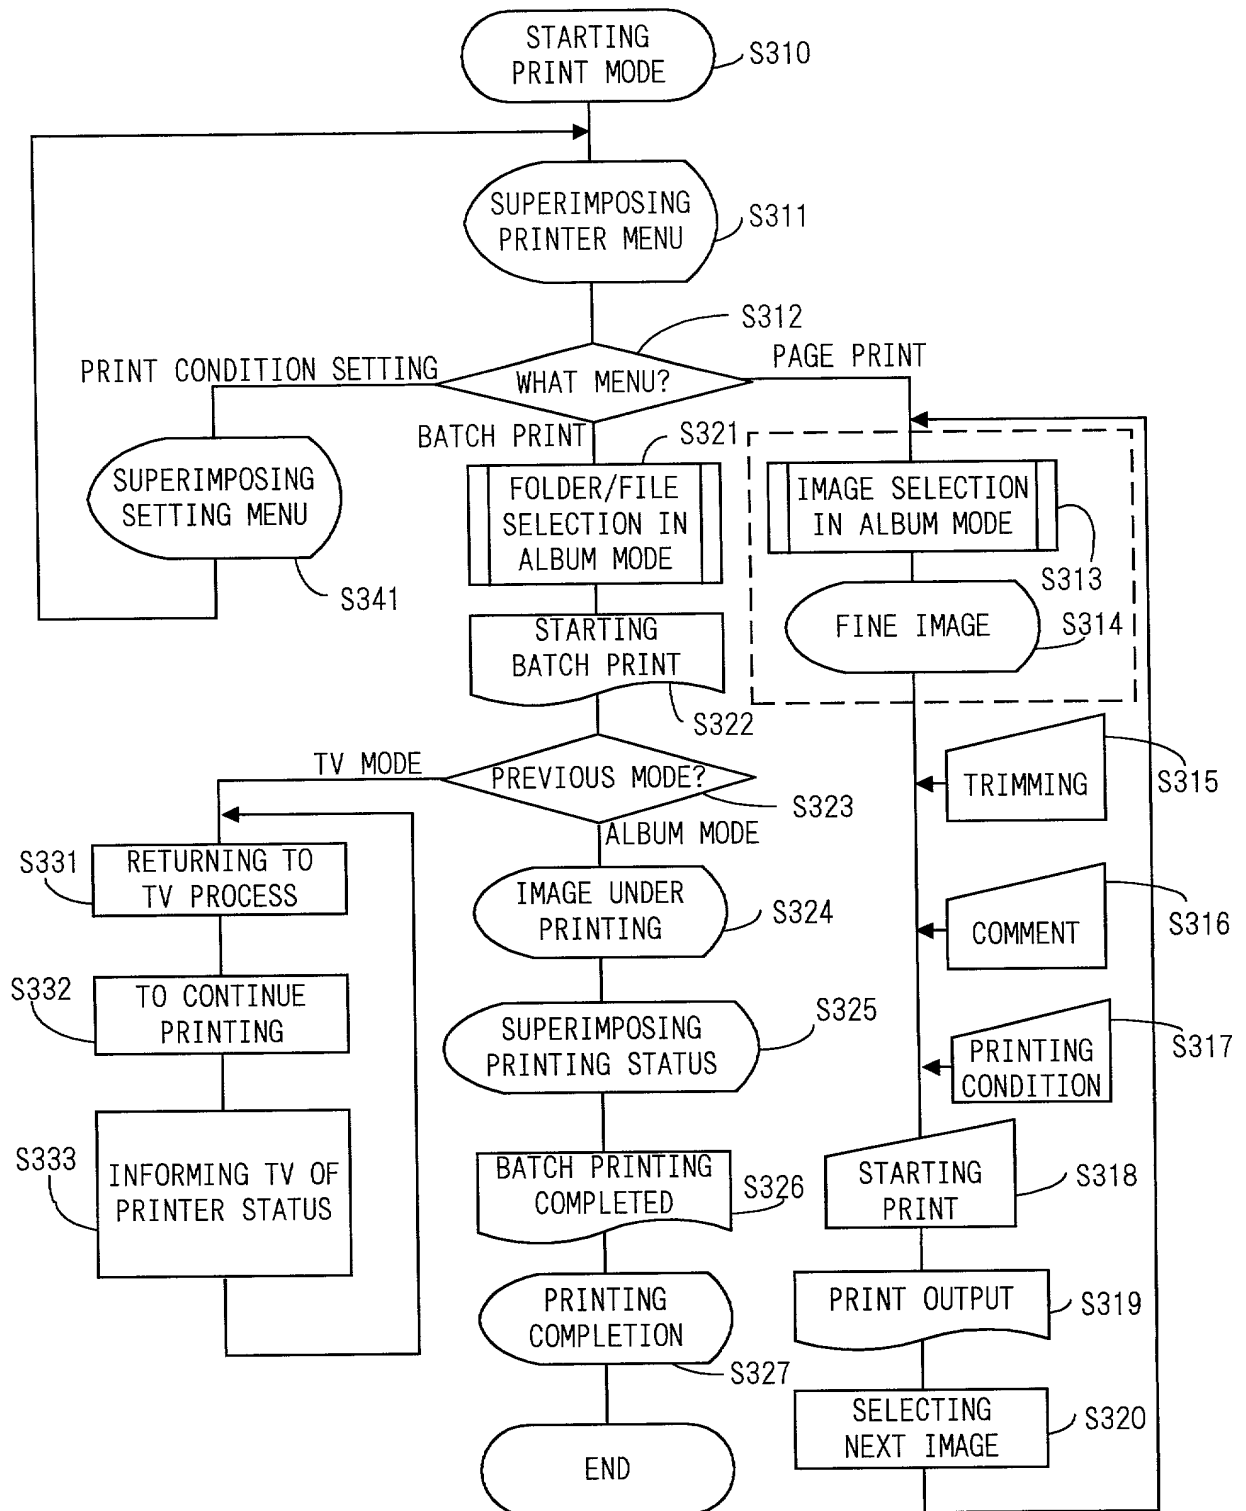


Fig. 43

44/51

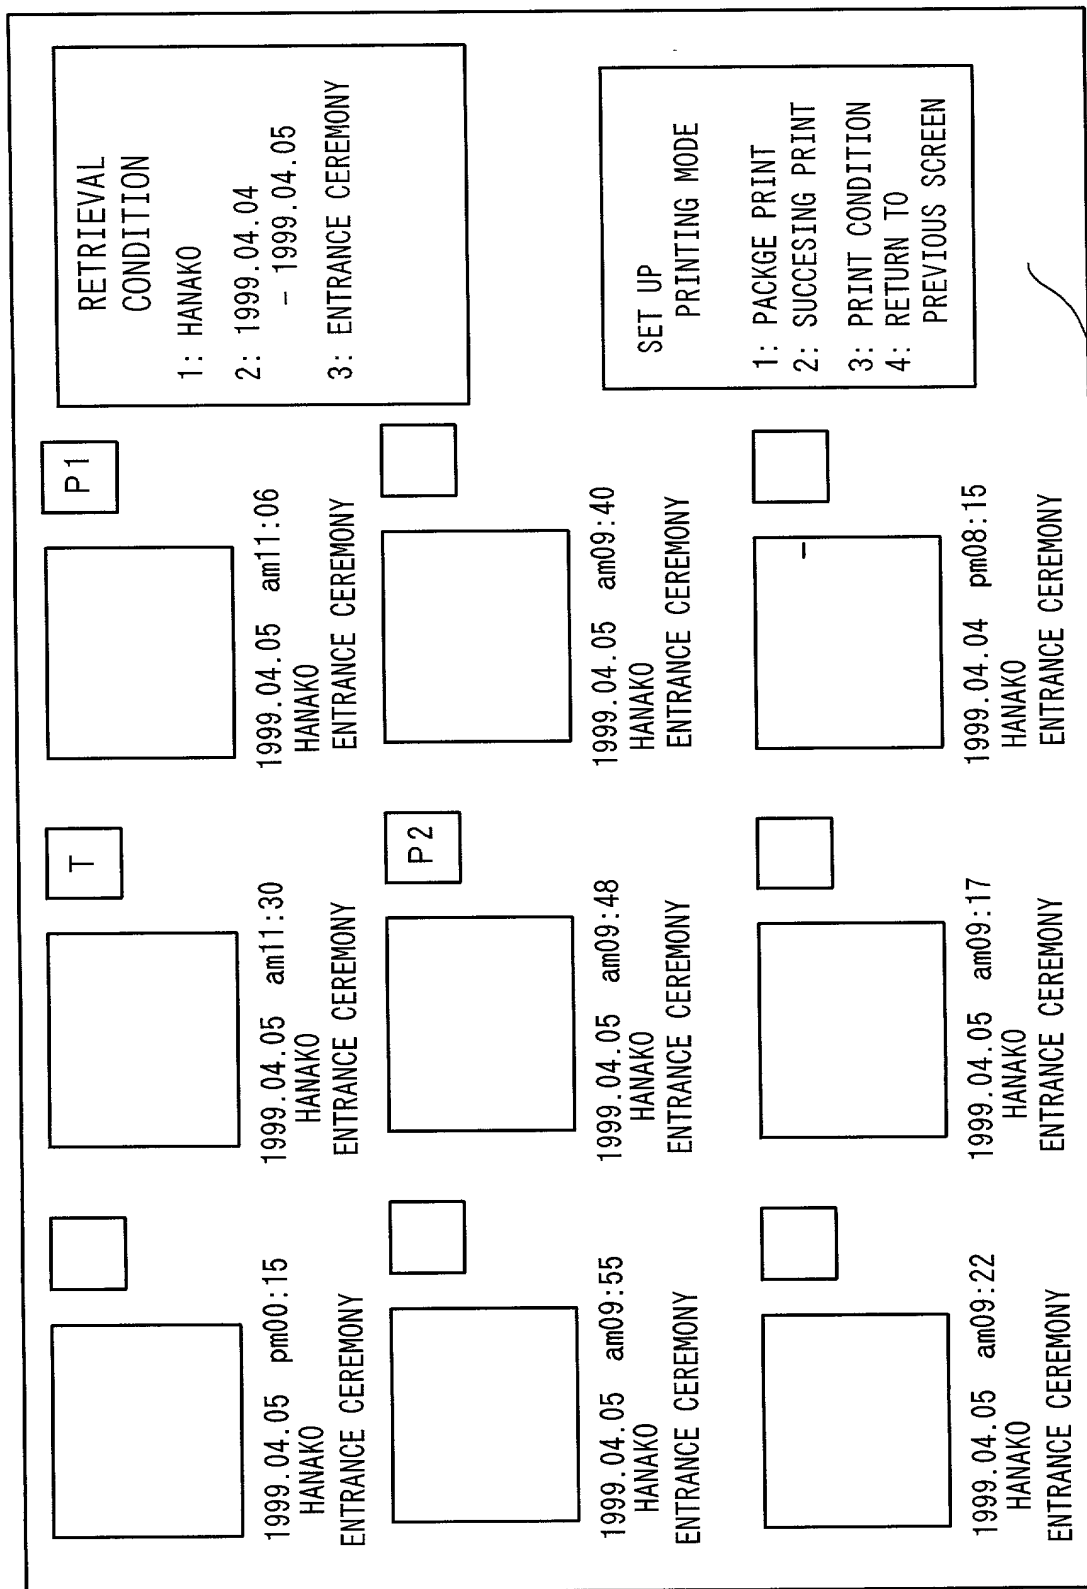


Fig. 44

<div>1999.04.05 pm12:15 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 am11:30 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 am11:06 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 am11:06 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 pm12:15 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 am11:30 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 am11:06 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 pm12:15 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 pm12:15 HANAKO ENTRANCE CEREMONY</div>	<div>1999.04.05 pm12:15 HANAKO ENTRANCE CEREMONY</div>
<div>T</div>	<div>P1</div>	<div>P4</div>							
<div>RETRIEVAL CONDITION 1: HANAKO 2: 1999.04.04 - 1999.04.05 3: ENTRANCE CEREMONY</div>									
<div>PRINTING CONDITION 1: PRINT IMAGE QUANTITY 2: KIND OF PRINTING PAPER 3: NUMBER OF PRINT 4: OUTPUT COMMENT 5: RETURN TO PREVIOUS SCREEN</div>									

Fig. 45

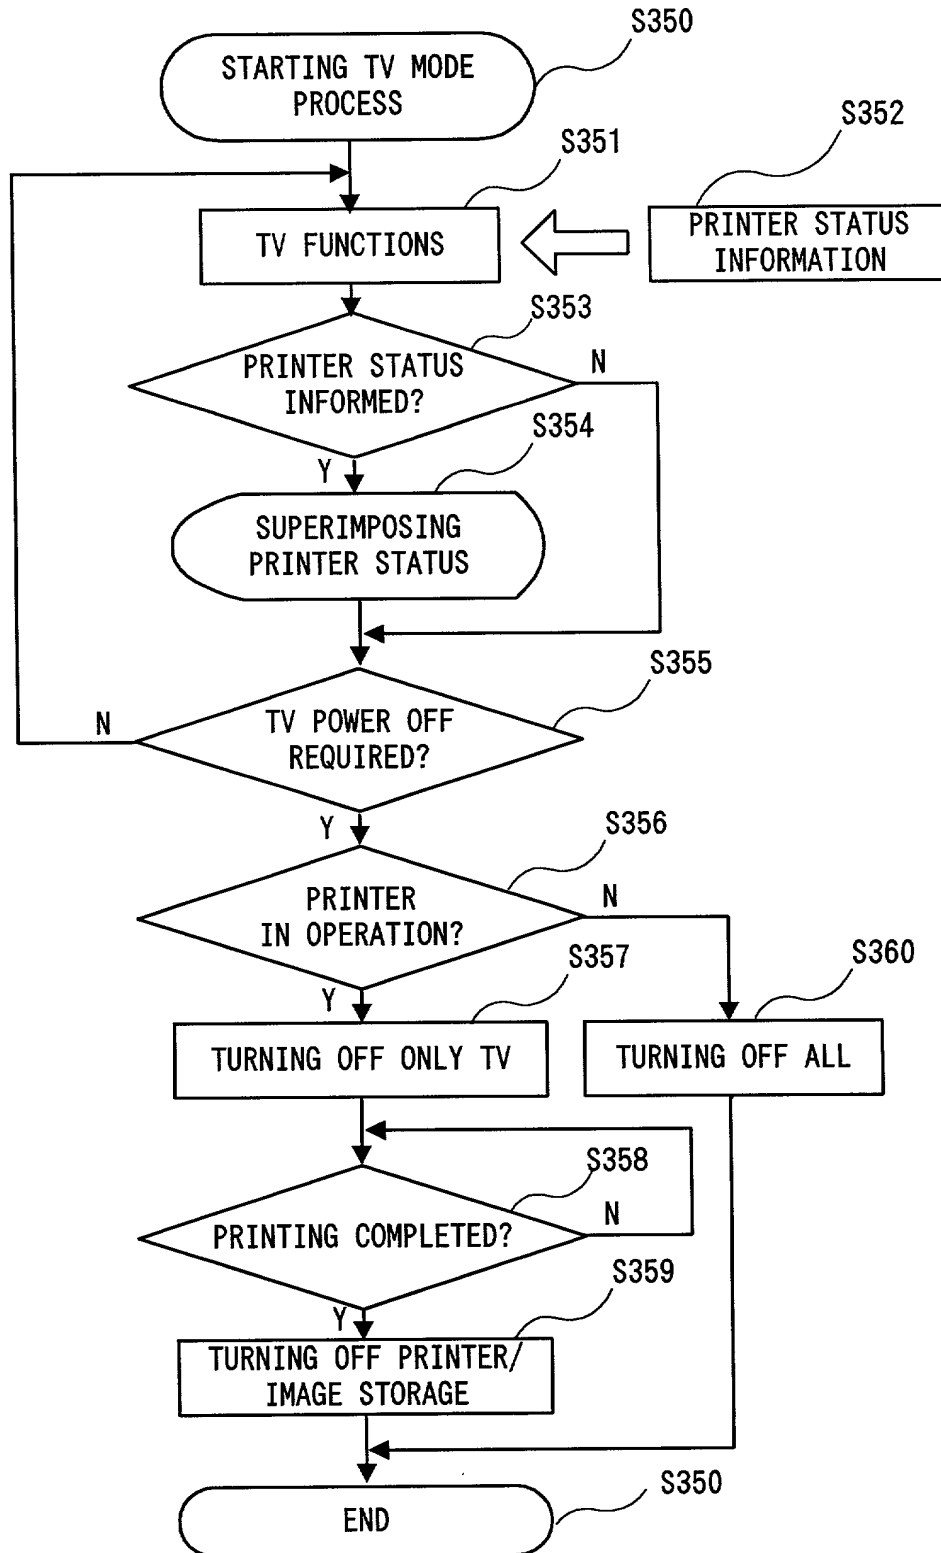



Fig.46

[illegible]

PHOTOGRAPHY AT NAEBA SKING GROUND  
DURING MEET  
EXCELLENT JUMPING FORM

Fig. 47

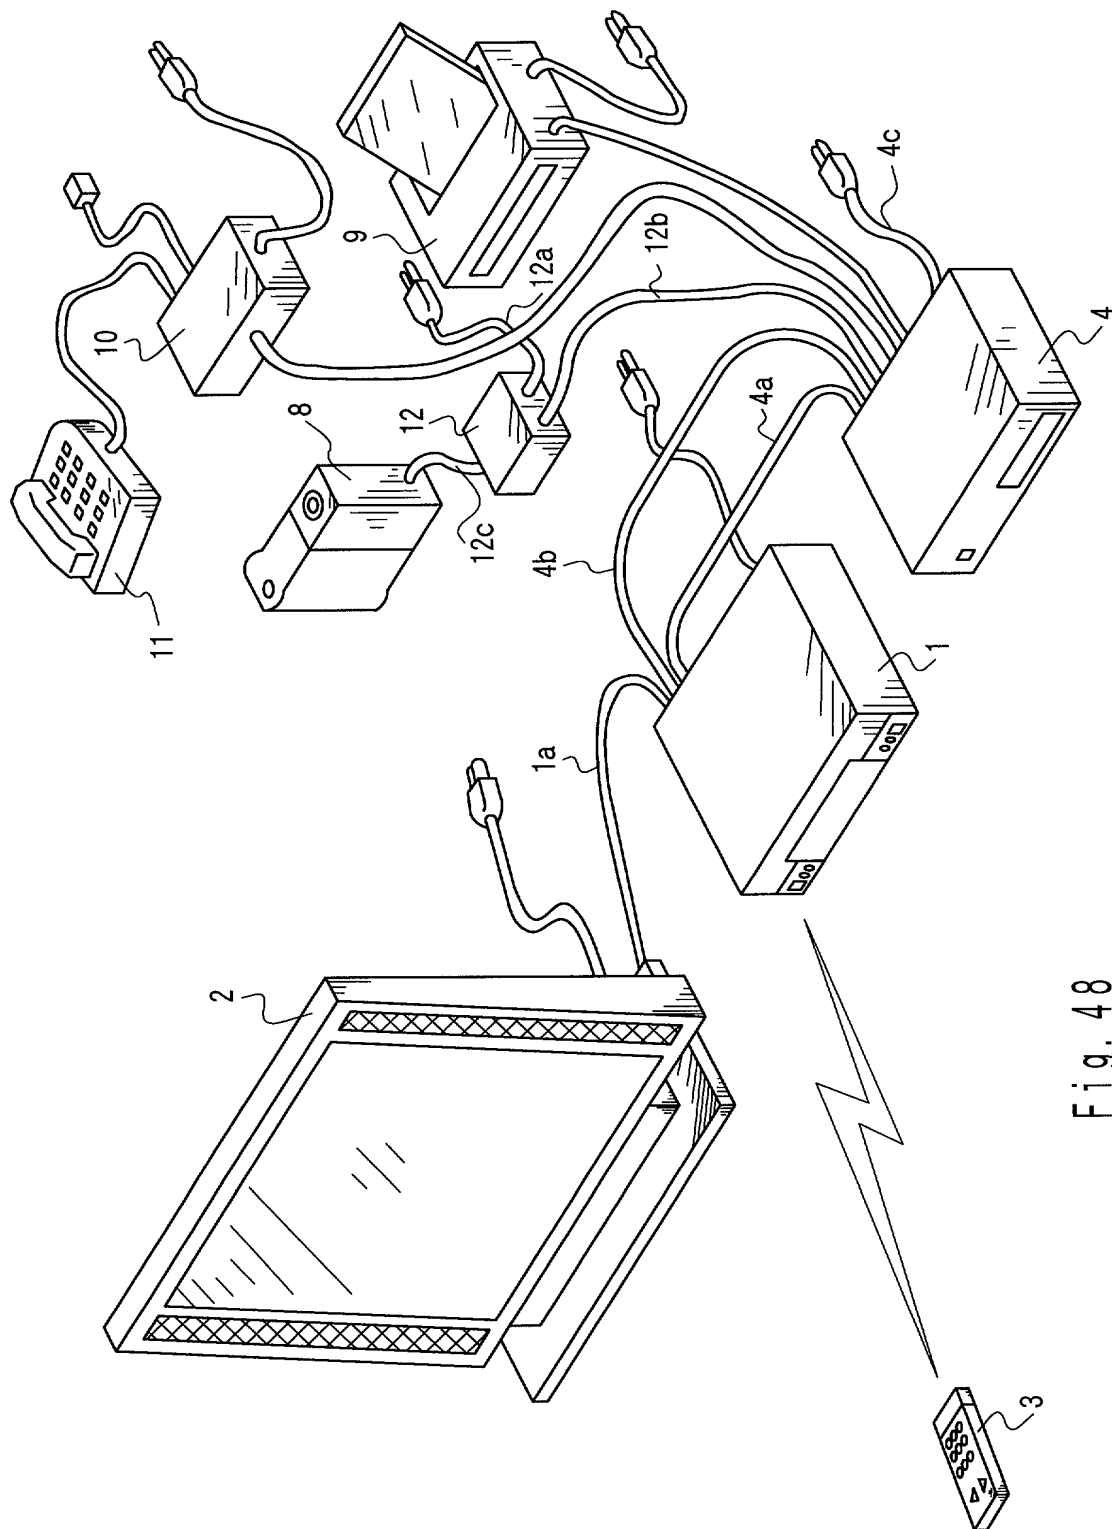


Fig. 48

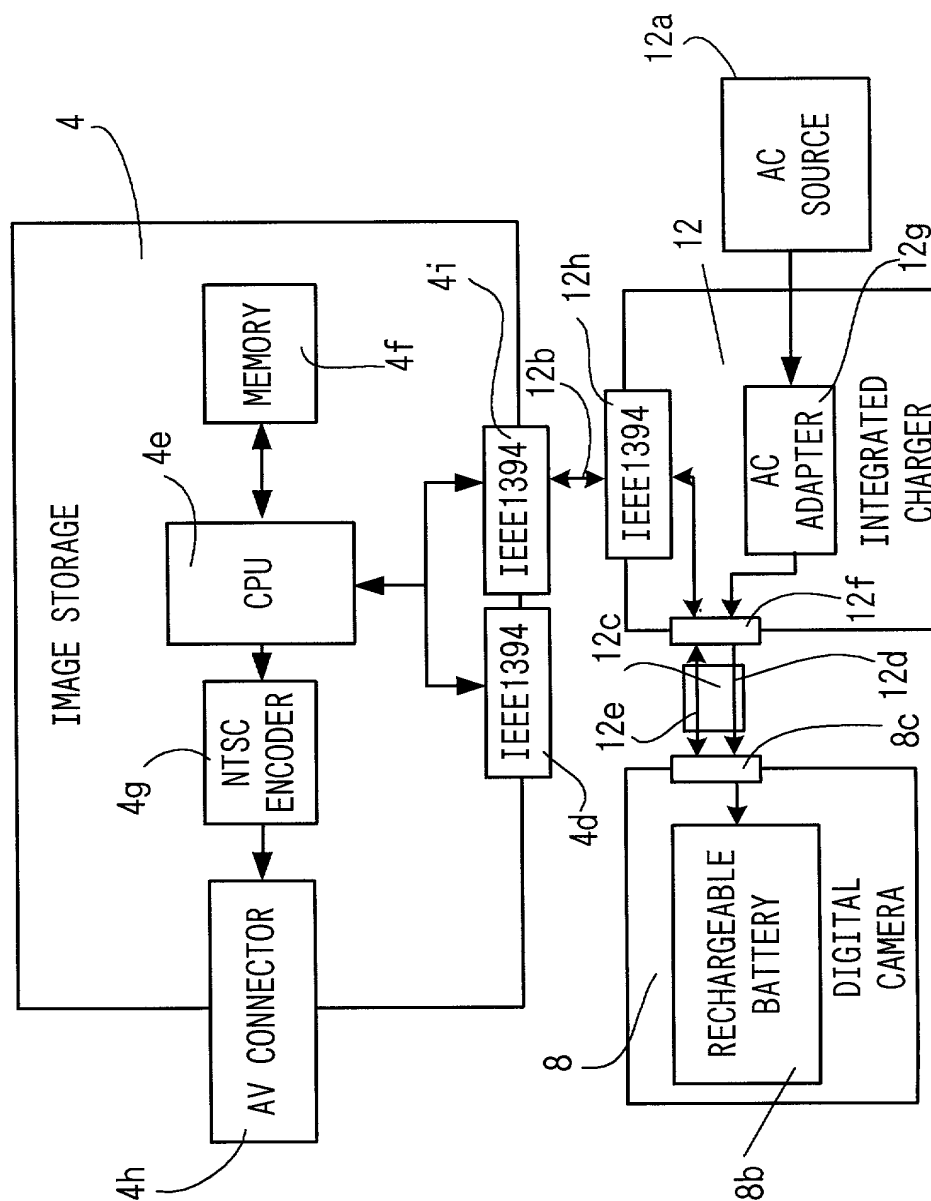


Fig.49

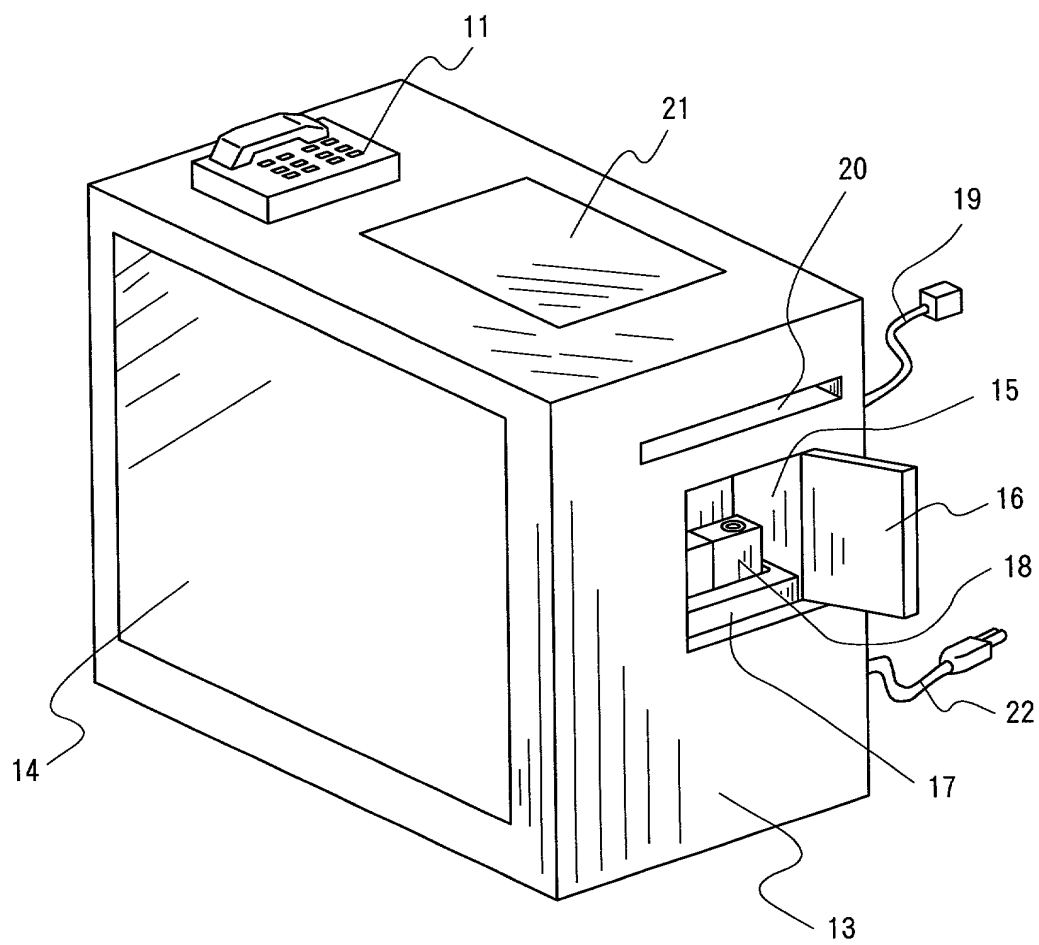


Fig. 50



51/51

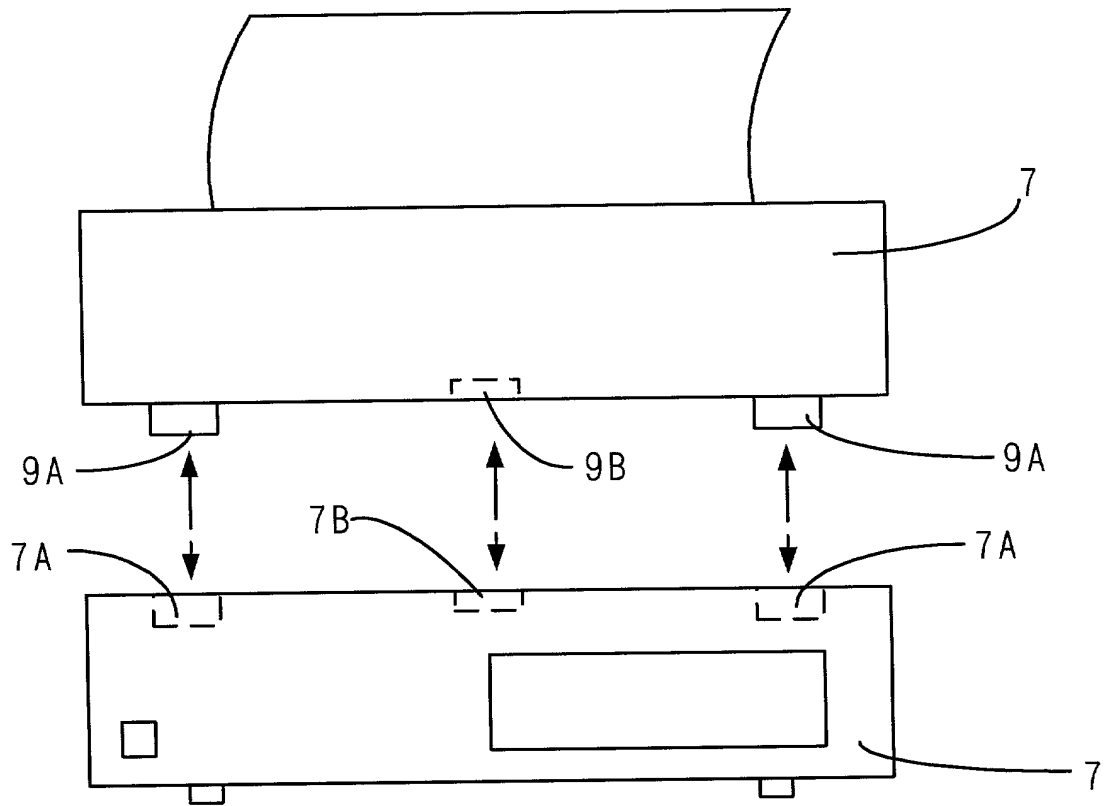


Fig. 51A

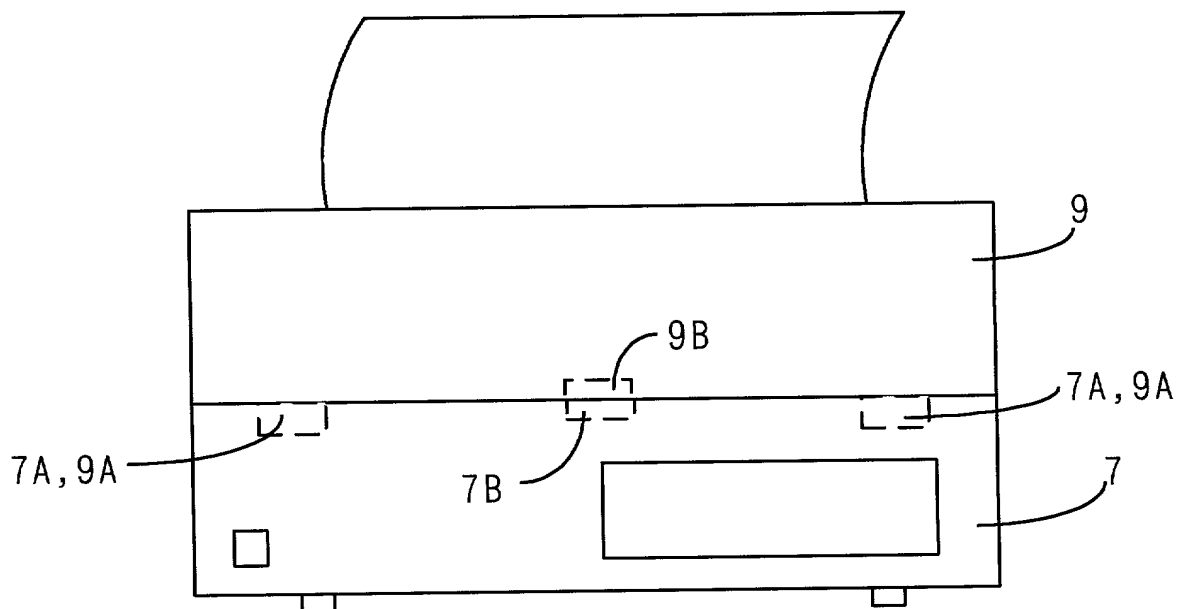


Fig. 51B

# Declaration and Power of Attorney for Patent Application

## 特許出願宣言書兼委任状

### Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便宛先および国籍は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、特許請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMAGE STORAGE

その明細書を  
(該当するものにチェック)  
☐ ここに添付する。

☐ 年 月 日に

出願番号第 \_\_\_\_\_ として提出され、

年 月 日に補正し、  
(該当する場合)

私は、前記のとおり補正した特許請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦施行規則第 37 章第 1 条第 56 項に従い、本願の特許性の有無について重要な情報を開示すべき義務を有することを認める。

私は、米国法第 35 章第 119 条に基づく下記の外国特許出願もしくは発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の提出日前の提出日を有する外国特許出願もしくは発明者証出願および/もしくは米国仮出願を以下に明記する：

the specification of which  
(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior foreign and/or provisional applications  
先行外国出願/仮出願

Priority claimed  
優先権の主張

11-149972 (Number/番号)	JAPAN (Country/国名)	May 28, 1999 (Day/Month/Year Filed/提出年月日)	<input checked="" type="checkbox"/> (Yes/はい)	<input type="checkbox"/> (No/いいえ)
11-163988 (Number/番号)	JAPAN (Country/国名)	June 10, 1999 (Day/Month/Year Filed/提出年月日)	<input checked="" type="checkbox"/> (Yes/はい)	<input type="checkbox"/> (No/いいえ)
11-163989 (Number/番号)	JAPAN (Country/国名)	June 10, 1999 (Day/Month/Year Filed/提出年月日)	<input checked="" type="checkbox"/> (Yes/はい)	<input type="checkbox"/> (No/いいえ)
11-163990 (Number/番号)	JAPAN (Country/国名)	June 10, 1999 (Day/Month/Year Filed/提出年月日)	<input checked="" type="checkbox"/> (Yes/はい)	<input type="checkbox"/> (No/いいえ)

私は、米国法第 35 章第 120 条に基づく下記の米国特許出願の利益を主張し、本願の特許請求の範囲各項に記載の主題が米国法第 35 章第 112 条の第 1 段落に規定の態様で先の米国出願に開示されていない限度において、先の出願の提出日と本願の国内提出日もしくは PCT 国際出願提出日の間に公表された連邦施行規則第 37 章第 1 条第 56 項に記載の重要な情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/  
現状: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/  
現状: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、米国法第 18 章第 1001 条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true: and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

002250 T2292560

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手續を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。（代理人氏名および登録番号を明記のこと）

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;  
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;  
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;  
Mario A. Costantino, Reg. No. 33,565; Caroline D. Dennison, Reg. No. 34,494; and  
Stephen J. Roe, Reg. No. 34,463

Send Correspondence To/書類送付先:

OLIFF & BERRIDGE  
P. O. BOX 19928  
ALEXANDRIA, VIRGINIA 22320  
USA  
Telephone: (703) 836-6400

Direct Telephone Calls To (name and telephone number)/直通電話連絡先(名称および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名 Akira OHMURA	
Inventor's signature/同発明者の署名 <i>Akira Ohmura</i>	Date/日付 May 19, 2000
Residence/住所 Tokyo, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o Nikon Technologies Inc. 3-25, Futaba 1-chome, Shinagawa-ku, Tokyo 142-0043, Japan	
Full name of second joint inventor (if any)/第二共同発明者の氏名(該当する場合) Tetsushi NOMOTO	
Second inventor's signature/第二発明者の署名 <i>Tetsushi Nomoto</i>	Date/日付 May 19, 2000
Residence/住所 Tokyo, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o Nikon Technologies Inc. 3-25, Futaba 1-chome, Shinagawa-ku, Tokyo 142-0043, Japan	

Supply similar information and signature for third and subsequent joint inventors.  
第三又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

002250 72294560

Full name of third joint inventor (if any)/第三共同発明者の氏名(該当する場合) Yukinobu ISHINO	
Third inventor's signature/第三発明者の署名 <i>Yukinobu Ishino</i>	Date/日付 May 19, 2000
Residence/住所 Tokyo, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o Nikon Technologies Inc. 3-25, Futaba 1-chome, Shinagawa-ku, Tokyo 142-0043, Japan	
Full name of fourth joint inventor (if any)/第四共同発明者の氏名(該当する場合) Masahide TANAKA	
Fourth inventor's signature/第四発明者の署名 <i>Masahide Tanaka</i>	Date/日付 May 19, 2000
Residence/住所 Tokyo, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o Nikon Technologies Inc. 3-25, Futaba 1-chome, Shinagawa-ku, Tokyo 142-0043, Japan	
Full name of fifth joint inventor (if any)/第五共同発明者の氏名(該当する場合)	
Fifth inventor's signature/第五発明者の署名	Date/日付
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便宛先	
Full name of sixth joint inventor (if any)/第六共同発明者の氏名(該当する場合)	
Sixth inventor's signature/第六発明者の署名	Date/日付
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便宛先	

Supply similar information and signature for seventh and subsequent joint inventors.  
第七又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

002250 "T229/650